LINCOLN COUNTY HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 07/24/2025 Expiration Date: 07/23/2026 Permit#25-56242

Property Owner: Brent and Rebecca Crow

Mailing Address: [redacted]

Installer: Terry Oedewaldt License #: 2

Approved Work: (Check One) ☒ New Installation ☐ Existing System

☐ Replace Drainfield ☐ Replace Tank ☐ Extension

Describe: Installation of new gravity system for 5 Bedroom House.

Legal: QUARTZ MOUNTAIN ESTATE, S24, T31 N, R32 W, LOT 11, ACRES 5.603, PM 7039

Property Address: 274 Abby Rd., Libby, MT 59923 Assessment Code: 56242

DEQ COSA: E.Q. #25-2268 Quartz Mountain Date: 6/8/25

Approved Design Criteria: Installation of new gravity system for 5 Bedroom House with 5 Laterals @ 90' with reduction for chambers.

# of Bedrooms: 5 Septic Tank Size: 1500 Trench Width: 24"

# of Laterals: 5 Length of Laterals: 90' Trench Depth: 24"-36"

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET!!

Special Instructions: Install system according to the lot layout, the Lincoln County Wastewater Treatment and Disposal Regulation, Circular DEQ-4, and COSA(If Applies). Reduction given for chambers. It is the installer's responsibility to ensure that all required horizontal setbacks are met. CHANGES MUST BE PRE-AUTHORIZED BY THE DEPARTMENT.

Issued By: *Robin Blumberg, RS*

NOTICE: The Department must be notified at least 3 business days (72 hours) prior to backfilling the system. Call 406-283-2442. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation Ch. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.

Closure Statement:

This system is in compliance with the approved design criteria and Lincoln County's Wastewater Treatment and Disposal Regulation.

Signed: _____ *Date:* _____

This permit is not finalized until the system is inspected and the closure statement is signed.


This permit is not a guarantee that the system will function properly for a prescribed period of time.

Reviewed by the Local Reviewing Authority
Under contract with the
Department of Environmental Quality
Robin Blumley R.S. 5/28/25
Local Reviewer Date

Accepted under contract
James J. Evans, R.S. 6/8/25
DEQ Representative Date

REVISED LOT LAYOUT
LOT 11, QUARTZ MOUNTAIN ESTATES, PLAT 7039

SW1/4, SECTION 13 & NE1/4, SECTION 24,
T.31N., R.32W., P.M.,MT.
LINCOLN COUNTY, MONTANA
DATE: MARCH 2025

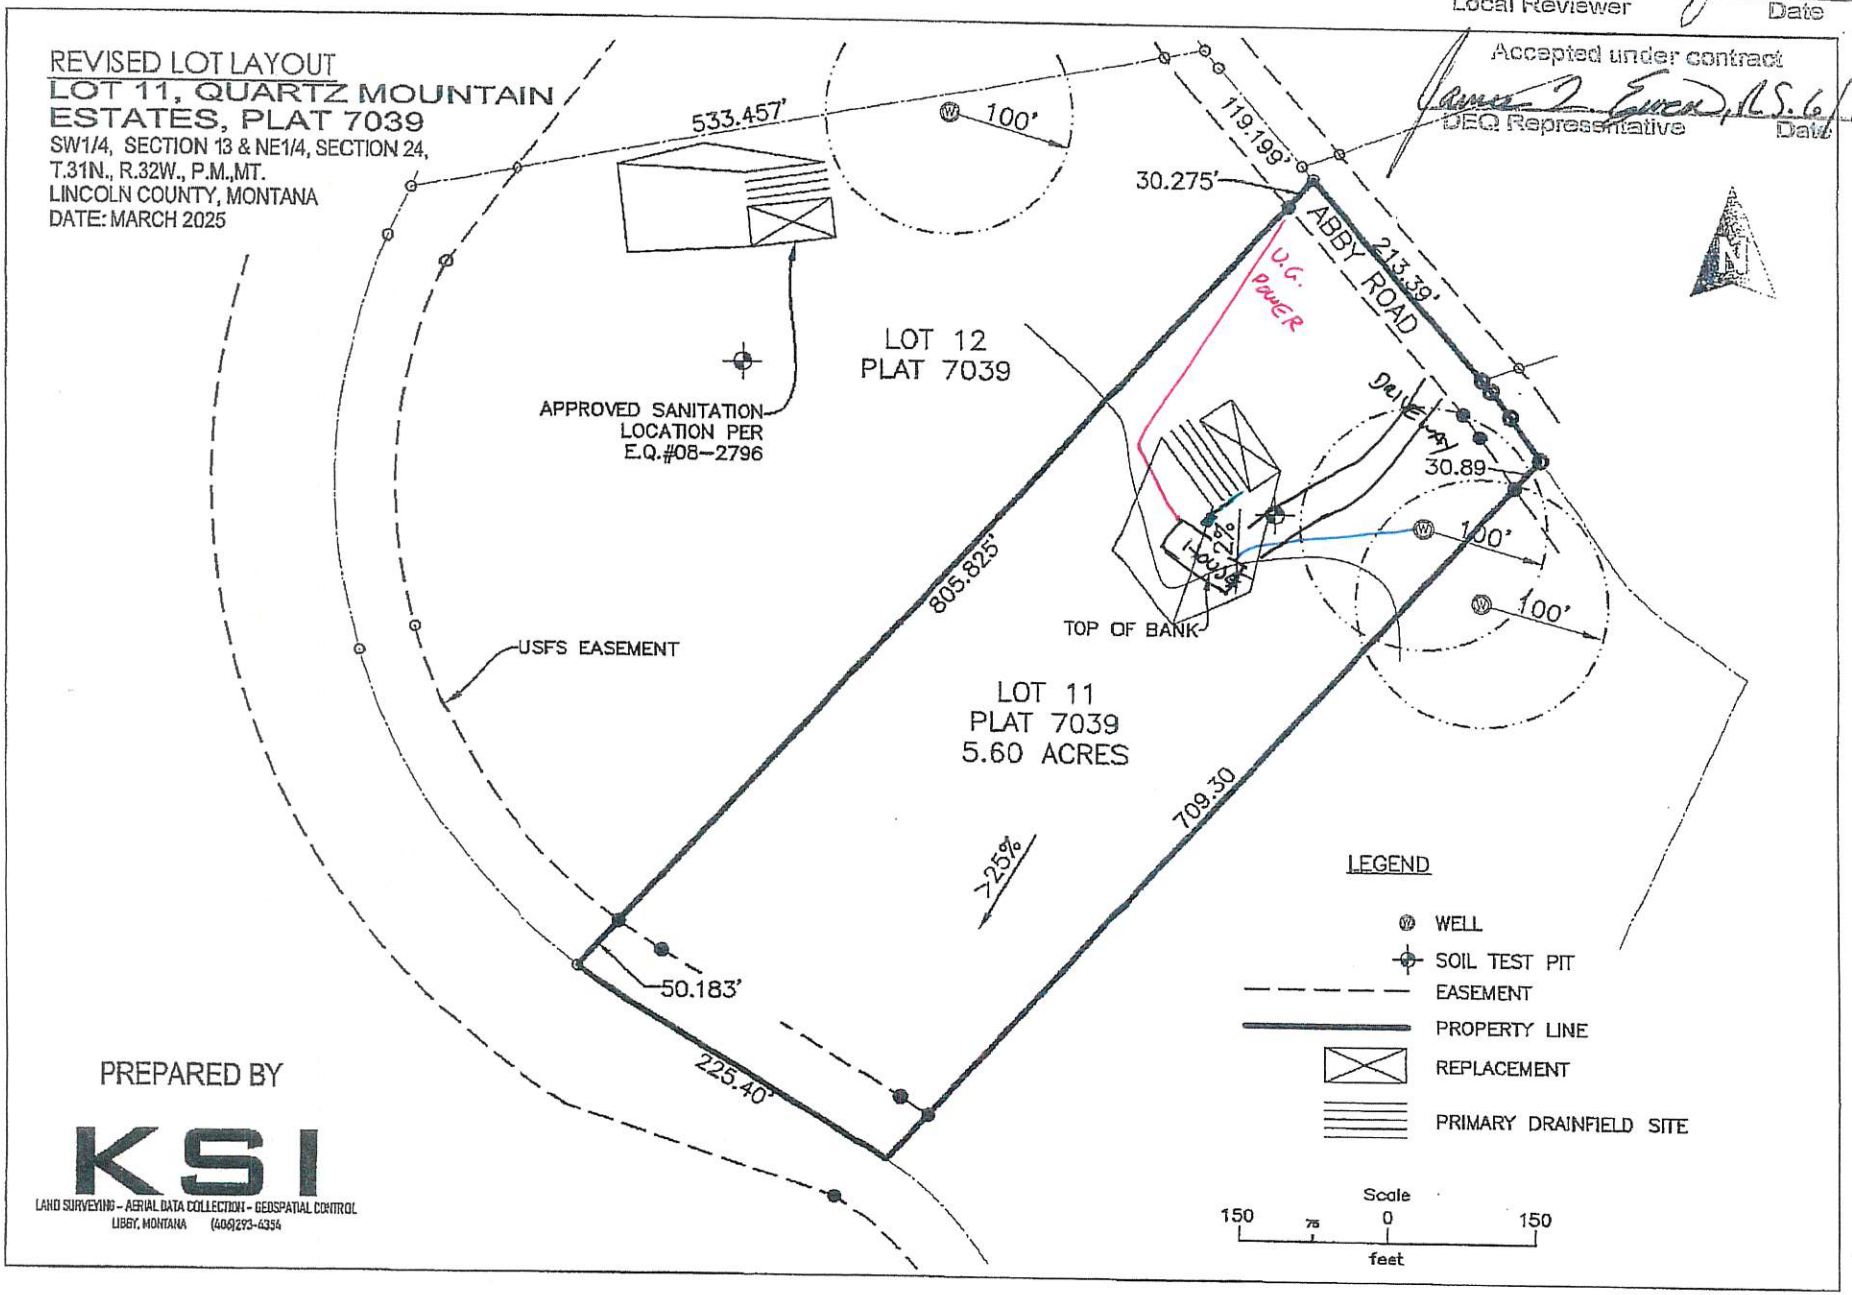

PREPARED BY

KSI
LAND SURVEYING - AERIAL DATA COLLECTION - GEOSPATIAL CONTROL
LIBBY, MONTANA (406)293-4354