LINCOLN COUNTY
DEPARTMENT OF ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 10/01/2010 Expiration Date: 10/02/2011

Property Owner: Jeb Casazza c/o: Koocanusa Excavating, Inc.

Address: [redacted]

Telephone: (Home) [redacted] (Work) [redacted]

Installer: Koocanusa Excavating, Inc. License No. 135

__XX__ New Installation _____ Existing System

_____ Repair _____ Replacement _____ Extension _____ Other

Describe: Using gravelless chambers – sizing reduction allowed per "Drainfield Size" below.

Parcel Description:

Legal: NW-1/4 S18 T36 R26

Address or Location: West of Costich Lake

Approved Design Criteria:

Bedrooms: 3 Septic Tank Size: 1000 gallons Drainfield Size: 336 Linear Feet

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET !!

Special Instructions: INSTALL SYSTEM ACCORDING TO LAYOUT, DEQ-4 AND LINCOLN COUNTY WASTEWATER REGULATION #3. ANY DEVIATIONS FROM APPROVED PLAN MUST BE AUTHORIZED BY THE DEPARTMENT.

Issued By: *Kendra J. Lind, R.S.*

Closure Statement:

I, _____, have inspected this system and found it to be in compliance with the conditions of the permit, and the Lincoln County Wastewater Treatment and Disposal Regulation.

Signed: _____ *Date:* _____

Title: _____

NOTICE: The Department must be notified at least 48 hours prior to backfilling the system. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation No. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.

406-293-7781


DISCLAIMER

This permit is not a guarantee by the Department that the system will function properly for a prescribed period of time.

Legend

- perc test
- test hole
- proposed drainfield site
- proposed replacement area
- proposed well site w/ 100' isolation zone
- mixing zone

Name: Cassazza
County:Lincoln
Location: NE1/4sec.18-T36N-R6W
E.Q.#

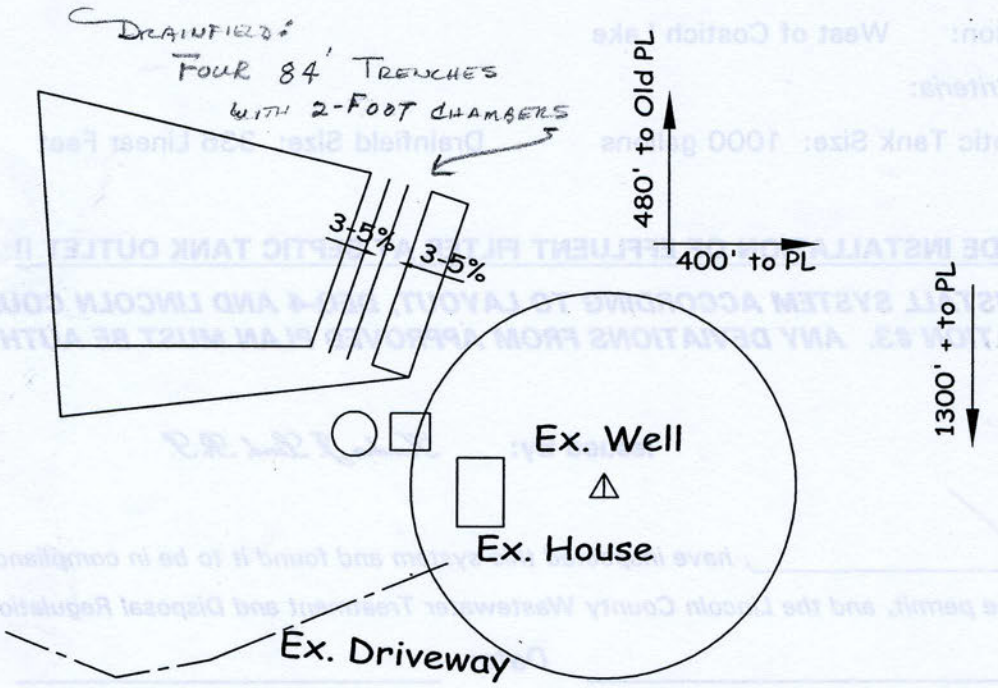

Parcel A
COS#3766
110.29 acres



1"=100'

Enviro-Tech
Consulting Inc.
PO Box 5674
Kalispell, MT 59903
(406)257-2795