

CERTIFIED CORNER RECORDATION

Corner E 1/4 Corner Section 4 T. 33 N. R. 26 W. P.M.M. Lincoln County

1903 Original GLO record by Abraham L. Rinearson and Gordon C. Smith

"Set a fir post, 3 ft. long, 3 ins. sq., 24 ins. in the ground, for 1/4 sec. cor., marked 1/4 S. 4 on W. face, and 3 on E. face; from which

A fir, 16 ins. diam., bears N. 64° W., 16 lks. dist., marked 1/4 S 4 B T.

A fir, 10 ins. diam., bears N. 86° E., 11 lks. dist., marked 1/4 S 3 B T.

1991 Rehabilitation

No evidence found.

By single proportionate measurement, set an alum. pipe, 30 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with 3 1/4 ins. diam. alum. cap marked as shown:

from which I establish 2 new bearing trees


A larch, 7 ins. diam., bears N. 47° E., 13.9 ft. dist., marked 1/4 S 3 B T.

A larch, 6 1/2 ins. diam., bears N. 68° W., 7.3 ft. dist., marked 1/4 S 4 B T.

Painted 6 in. red bands and painted blazes red on BT's. Hung BT and Land Survey Monument signs on BT's.

Measurements were made with a Silva hand compass (declination 19° E.) and a steel tape to the center of the root crowns of all trees. Distances are horizontal.

See Certificate of Survey No. 1870, filed in conjunction with this Corner Recordation, for ties to adjacent controlling corners used to establish this corner position.

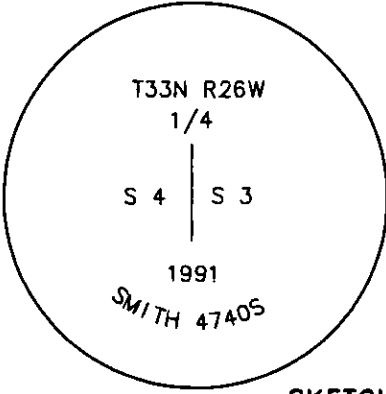
 <p style="text-align: center;">SKETCH OF CORNER</p>	<p style="text-align: center;">CERTIFICATION</p> <p>I, <u>S. R. Smith</u> <small>certify the information shown herein is true and correct.</small> <u>S R Smith</u> <small>Signature Ground Party Chief</small></p> <p>I, <u>S. R. Smith</u> <small>certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)</small> <u>S R Smith</u> <small>Signature of Surveyor & Seal</small></p> <p>Date: <u>9/30/91</u> Reg. No. <u>4740S</u> Employer: <u>Apogee, P.C.</u></p>
---	--

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on the Oct 16 day of 1991 was noted on the cross-index plot and is assigned page No. 4581-A, in book No. Coral Cummings by Bill Dwyer

County Official

Cross Index No. C-13 T. 33N. R. 26W. PMM

Adopted July 1, 1981, Montana Board of Professional Engineers & Land Surveyors



• corner this sheet

CRMCC1.dwg