

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

COR. 4 of HES 407 34 N. 33 W. Lincoln County
 Corner T. R. P.M.M.

- I. 1915 H.E.S. original record by Elmer R. Johnson: Set for Cor. No. 4, a slate stone, 24x20x7 ins., 14 ins. in the ground, marked 4 HES 407 on SW face, and a cross (x) on top for the exact corner point, from which:

A cross (x) on a white pine, 4 ins. diam., bears N38°25'E, 77 lks. dist.
 A cross (x) on a larch tree, 5 ins. diam., bears N28°40'E, 32 lks. dist.
 Each blazed and scribed 4 HES 407 BT.

Raise a mound of stone, 4 ft. base, 2 ft. high, SW of corner.


- II. Found a 20x9 ins. stone, firmly set, protruding 7 ins. above the ground, mkd. 4 HES 407 on SW face, from which:

A white pine stump, bears N38°E, 50.8 ft. dist., overgrown blaze.
 A larch stump, bears S28°W, 19.7 ft. dist., no scribing visible.

- III. Established two new bearing trees:

A cedar, 8 ins. diam., bears N12°E, 13.0 ft. dist., mkd. 4 HES 407 BT.
 A larch, 14 ins. diam., bears S84°E, 36.3 ft. dist., mkd. 4 HES 407 BT.

Painted red bands around the bearing trees and attached Land Survey Monument and Bearing Tree signs.
 Set a 6 ft. galvanized steel guard post with Land Survey Marker and Property Boundary decals, S6°E, 3 ft.
 Magnetic declination: 20° East.

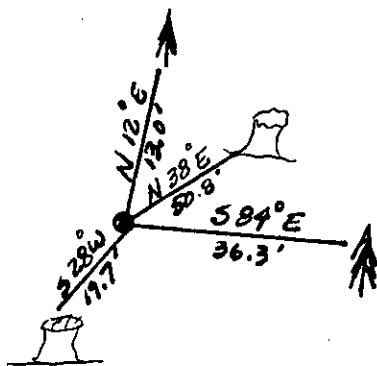

SKETCH OF CORNER

CERTIFICATION

Thomas Hommel

I, Thomas Hommel, certify the information shown herein is true and correct.

Signature Ground Party Chief

Alvah F. Hughes

I, Alvah F. Hughes, certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the Corner Recordation Act" (70-22-101, et seq., M.C.A.)

Signature of Surveyor & Seal

Date: 11/6/91

Reg. No.

7322

Employer: U.S. FOREST SERVICE

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on 4-21-92 was noted on the cross-index plat and is assigned page No. 5041, in book No. Coral M. Cunningham

County Official


4 HES 407

34 N

33 W

Cross Index No. T. R. PMM

Sec. 4



• - corner this sheet