Replacement

LINCOLN COUNTY SEPTIC SYSTEM PERMIT

ISSUED TO: Kenneth W. Allyn PHONE: [redacted]

ADDRESS: [redacted] CONTRACTOR: Gale-Floyd

ISSUED BY (sign.): Ronald K Anderson R.S. DATE: 5-28-91

INSPECTION BY (sign.): _____ DATE: _____

*PLEASE NOTE: The Lincoln County "On-site Sewage Disposal Regulation" does not conform with all requirements of the Montana State "Sanitation in Subdivision Act". Therefore, septic systems permitted under the county regulation may not be approvable for the purpose of future land division health reviews.

You must notify the Department of Environmental Health a minimum of 8 working hours before backfilling the septic system, so that it can be inspected.

LOCATION OF PROPOSED SYSTEM: Block 4 Lot 9 Angel Island


SEPTIC TANK: 2 gal. ABSORPTION AREA: 300 ft²


SEWAGE DISCHARGE: — gal/day No. OF BEDROOMS: 2

WATER SUPPLY SOURCE: Public SOIL: Silt Loam SLOPE: 0-3%

INSTRUCTIONS: Dig a ditch at least 100' in length x 2½-3' deep x 3' wide according to lot layout and ditch diagram. Grade of pipe should not exceed 1% drop

SKETCH OF LOT LAYOUT:

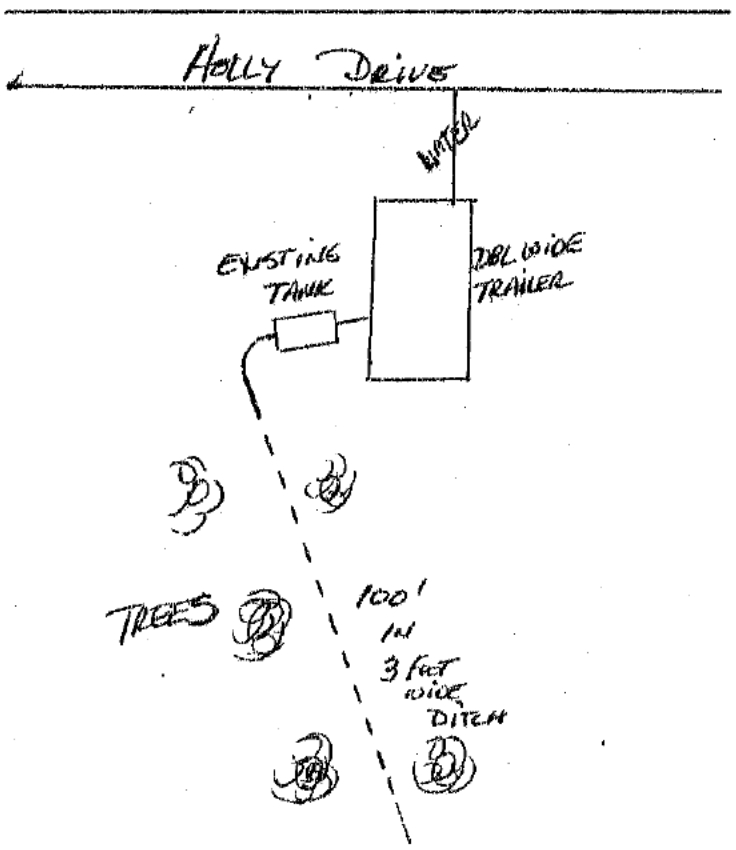

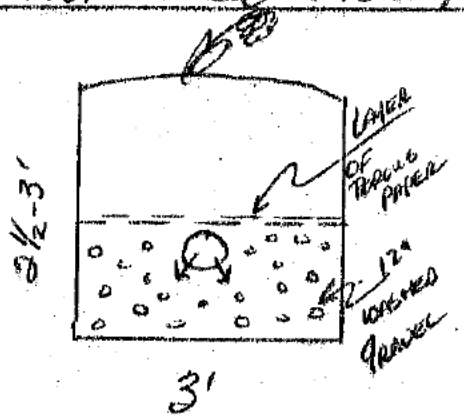

DITCH DIAGRAM