

INSTRUCTIONS

Q:CO-STD/152
Created 4/8/92

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner No. 3 Kentucky MS 6196 T. 25 N. R. 30 W. P.M.M. LINCOLN County

RECORD:

MS NO. 6196 Kentucky, Robert C. Williams, U.S. Deputy Mineral Surveyor, 1901

330 N.W. location corner. Set a post, 4 1/2 ins. square, 5 ft. long, 2 ft. deep, marked 3-6196, for Cor. No. 3, and raised a mound of stone and earth around post.

A blazed fir tree, 10 ins. diam., marked B.T. 3-6196, bears N.29°E., 6 ft.

FOUND:

Found no remaining evidence of the original post, mound of stone, or the bearing tree.

TO PERPETUATE:

At record position, set a 5/8" x 24" rebar, with a USFS 3-1/4" aluminum cap 22" in the ground, marked as shown below.


From which new bearing trees:


A larch, 7" in diam., bears N.12°30'E., 19.4', blazed and scribed "3 MS 6196 BT"

A larch, 14" in diam., bears N.65°E., 15.1' blazed and scribed "3 MS 6196 BT"

Place a "Land Survey Monument" (54-9), and a "Bearing Tree" (54-3) sign on the bearing trees. Painted all blazes red, and a 6" red band above the "Bearing Tree" signs. Placed 6' steel posts on property line, 3'+/- from the corner with "Land Survey Marker" (54-9), and "Property Boundary" (54-2) decals.

See Certificate of Survey, recorded in Lincoln County

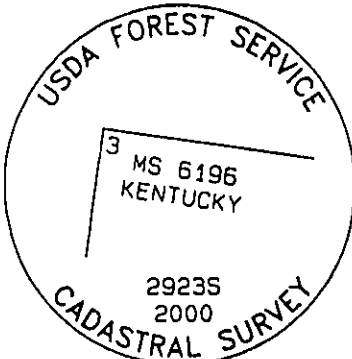

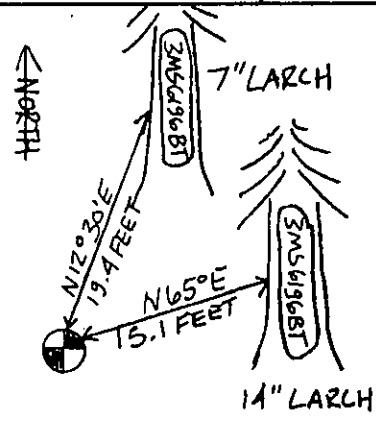

CERTIFICATION

I, Matt Jacobson
certify the information shown herein is true and correct.

Matt Jacobson
Signature Ground Party Chief

I, R.A. Ainsworth
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101 et seq., M.C.A.)

R.A. Ainsworth
Signature of Surveyor & Seal

Date: 11/00 Reg. No. 29235
Employer: Professional Consultants, Inc.

SKETCH OF CORNER

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on Jan 19 2001 was noted on the cross-index plat and is assigned page No. 10474, in book No. _____

Coral M. Cummings By OB
County Official

Sec. 8

| | | | |
|--|--|--|--|
| | | | |
| | | | |
| | | | |
| | | | |