LINCOLN COUNTY HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 03/21/2025 Expiration Date: 03/20/2026 Permit# 25-14641

Property Owner: Michael Wertenberger

Mailing Address: [redacted]

Installer: Caden Lamb License #: 193

Approved Work: (Check One) ☒ New Installation ☐ Existing System

☐ Replace Drainfield ☐ Replace Tank ☐ Extension

Describe: Installation of new gravity system for 3 Bedroom House.

Legal: S26, T34 N, R26 W, ACRES 20, E2SWNW

Property Address: 1714 Ivor Creek Rd., Trego, MT 59934 Assessment Code: 14641

DEQ COSA: EQ# Date:

Approved Design Criteria: Installation of new gravity system for 3 Bedroom House with 4 Laterals @ 85' with reduction for chambers.

# of Bedrooms: 3 Septic Tank Size: 1000 Gallon Trench Width: 24"

# of Laterals: 4 Length of Laterals: 85' Trench Depth: 24"-36"

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET!!

Special Instructions: Install system according to the Lot layout, the Lincoln County Wastewater Treatment and Disposal Regulation, Circular DEQ-4, and COSA(if applies). Reduction for chambers given. It is the installer's responsibility to ensure that all required horizontal setbacks are met. CHANGES MUST BE PRE-AUTHORIZED BY THE DEPARTMENT.

Issued By: *Robin Blumberg, RS*

NOTICE: The Department must be notified at least 3 business days (72 hours) prior to backfilling the system. Call 406-283-2442. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation Ch. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.

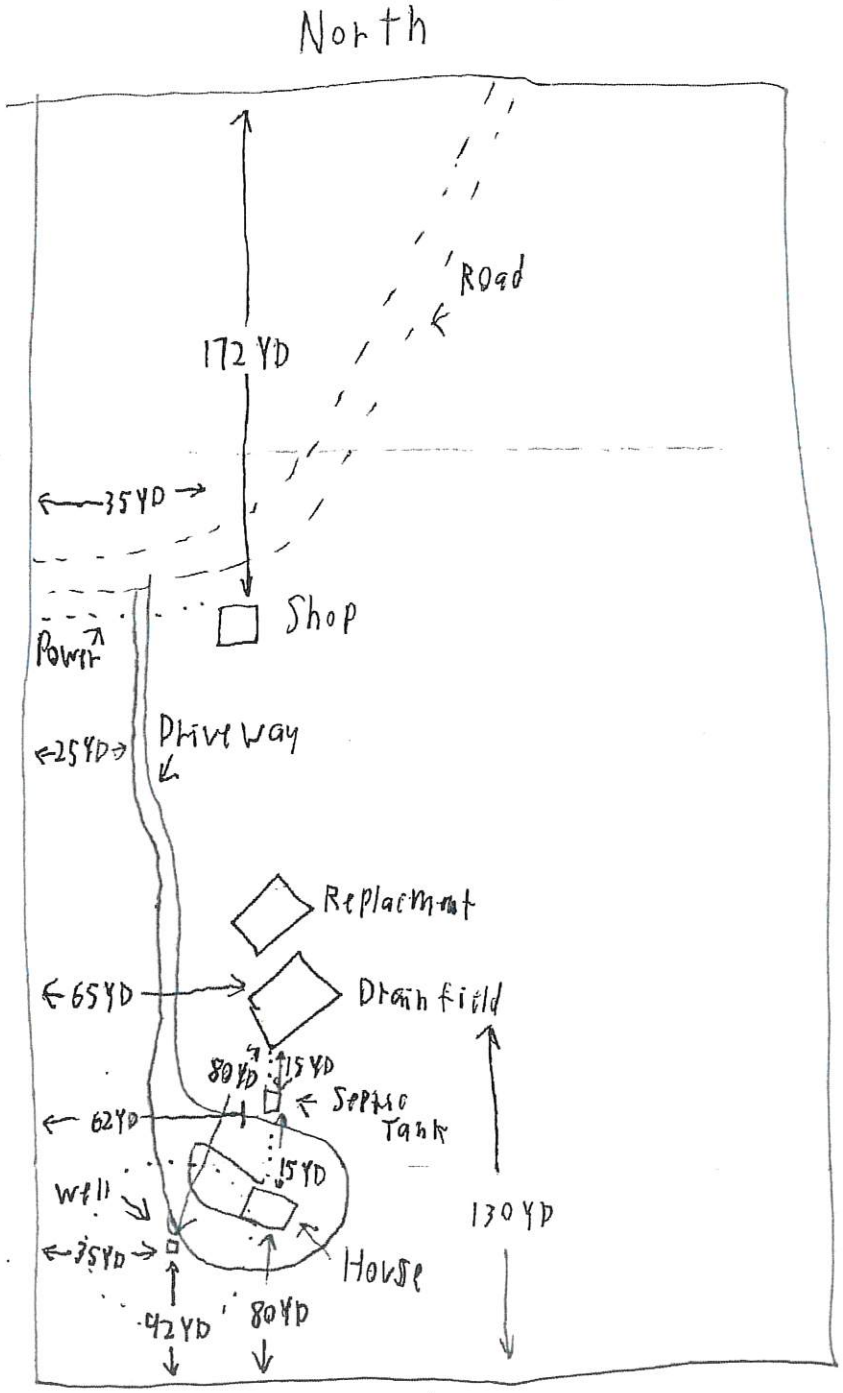
Closure Statement:

This system is in compliance with the approved design criteria and Lincoln County's Wastewater Treatment and Disposal Regulation.

Signed: _____ *Date:* _____

This permit is not finalized until the system is inspected and the closure statement is signed.

This permit is not a guarantee that the system will function properly for a prescribed period of time.


North
Road
172 YD
35 YD
Shop
Powr
Drive way
25 YD
Replacment
65 YD
Drain field
80 YD
15 YD
Septic Tank
62 YD
15 YD
Well
130 YD
35 YD
House
42 YD
80 YD