County

LINCOLN COUNTY HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 08/16/2023 Expiration Date: 08/15/2024

Property Owner: Joshua Bearden

Mailing Address: [redacted]

Telephone: E-mail:

Installer: Tally Hoe License #: 1

Approved Work: (Check One) ☒ New Installation ☐ Existing System

☐ Replace Drainfield ☐ Replace Tank ☐ Extension

Describe: Installation of new septic system.

Parcel Description:

Legal: S09, T32 N, R29 W, S2SE LESS R/W 76.30 ACRES *10856*

Property Address: 187 Lawerence Mtn Rd., Libby, MT 59923 Assessment Code: 10856

DEQ COSA: EQ# Date:

Approved Design Criteria: Installation of new gravity system with 3 laterals @84'. Reduction for chambers.

# of Bedrooms: 3 Septic Tank Size: 1000 gallon Trench Width: 24"

# of Laterals: 3 Length of Laterals: ~~84'~~ 92 Trench Depth: 24"-36"

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET!!

Special Instructions: Install system according to the COSA, lot layout, the Lincoln County Wastewater Treatment and Disposal Regulation, and Circular DEQ-4. Reduction given for chambers. It is the installer's responsibility to ensure that all required horizontal setbacks are met. CHANGES MUST BE PRE-AUTHORIZED BY THE DEPARTMENT.

Issued By: Robin Blumberg, S97

NOTICE: The Department must be notified at least 3 business days (72 hours) prior to backfilling the system. Call 406-283-2442. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation Ch. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.

Closure Statement:

This system is in compliance with the approved design criteria and Lincoln County's Wastewater Treatment and Disposal Regulation.

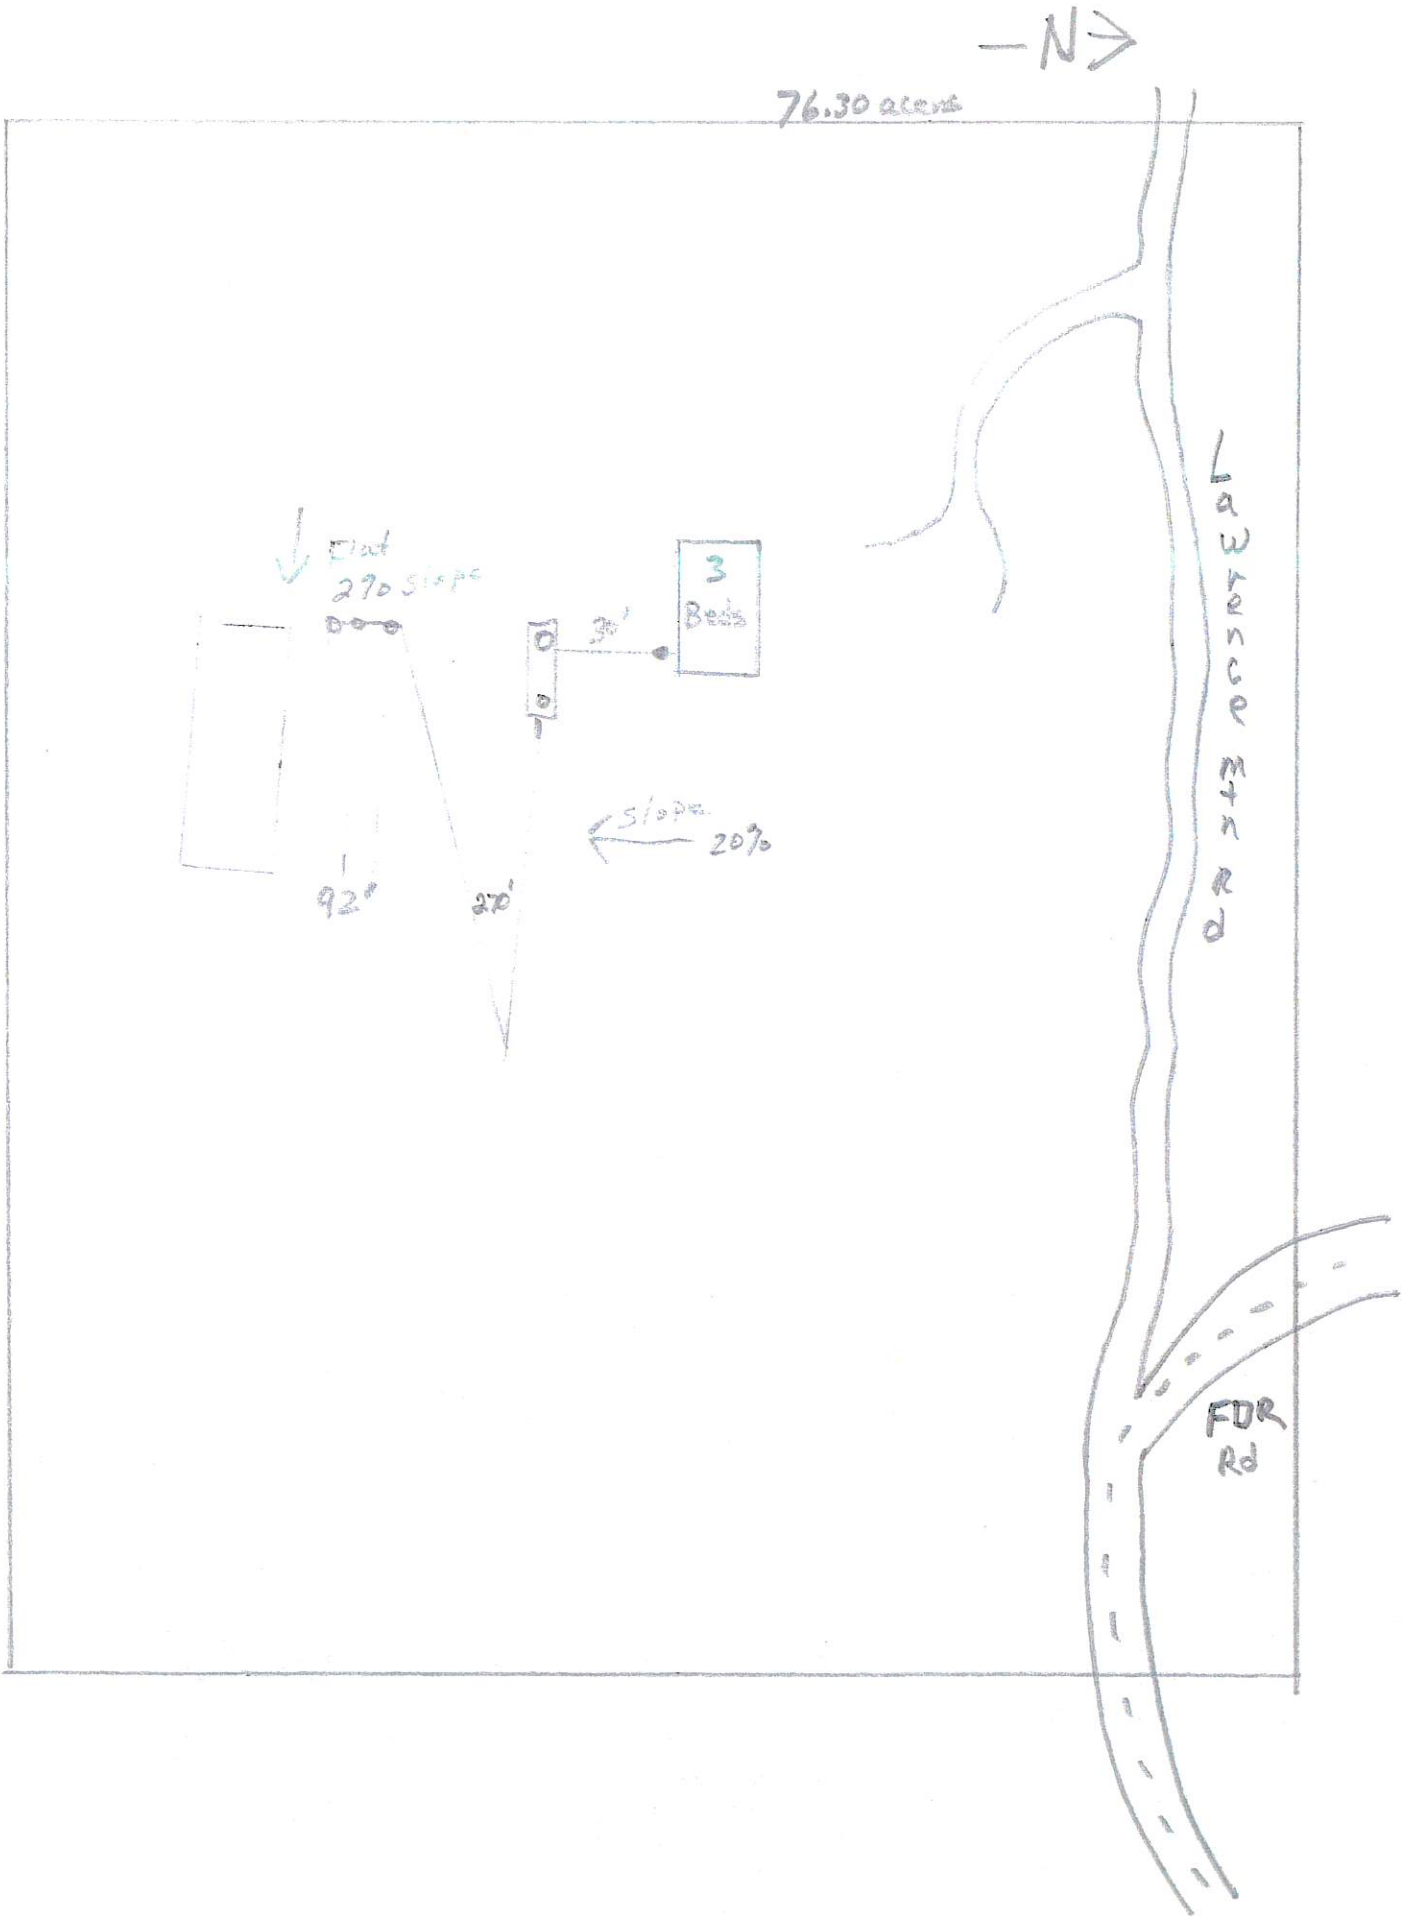
Signed: Thomas J Cole *Date:* 9-24-23

____ Lincoln County Health Department (LCHD) ✓ Licensed Installer w/ approval of LCHD

DISCLAIMER

This permit is not a guarantee by the Department that the system will function properly for a prescribed period of time.

5


N
76.30 acres
Lawrence Mtn Rd
FDR Rd
Flat
270 Slope
3
Beds
30'
92'
270'
Slope
20%