

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner MC EAST SHORE $\frac{S 3}{S 10}$ T. 26 N R. 27 W P.M.M. LINCOLN County

ORIGINAL AND/OR SUBSEQUENT RECORD

Set A Fir Post 3 Feet Long, 5 ins. Square, with Marked Stone, 24 ins. In the Ground, For Meander Cor. of Fraction Secs. 3 And 10.


EVIDENCE FOUND

Found A 10" X 10" Stone Upright In Middle of Marsh Land Area. No Visable Markings Determined. Distance Measures Within 1' of Record To 1/4 cor. For Sec. 3 And Sec. 10. Accepted Stone As Meander Cor.

PERPETUATION

Set Steel Fence Post with MARLS Sign Near the Stone. Made Tie To Logan Park Campground utility Building. SE Cor. of Building Bears N16°E, 232.5 Feet.

Declination used - 18° E

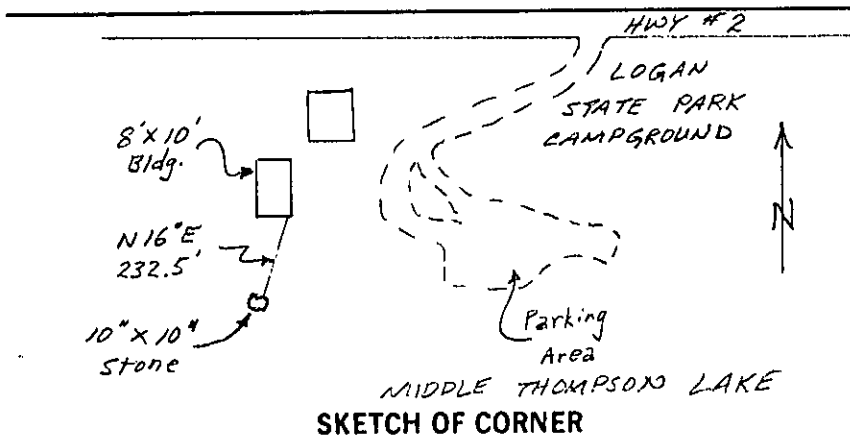

CERTIFICATION

I, GLENN R. HOWARD
 certify the information shown herein is true and correct.
Glenn R. Howard
 Signature Ground Party Chief


I, TERRY L. DRUYVESTEIN
 certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-01, et seq., M.C.A.)
Terry L. Druyvestein
 Signature of Surveyor & Seal 2927ES

Date: 4-18-91 Reg. No. 2927 ES

Employer: STENSATTER DRUYVESTEIN & ASSOCIATES

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on April 22, 1991 was noted on the cross-index plat and is assigned page No. 4527, in book No. _____

Coral M. Cummings by Pats Bickel
 County Official



Cross Index No. E 14-15 T. 26 N R. 27 W P.M.M.

• corner this sheet