LINCOLN COUNTY HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 11/29/2023 Expiration Date: 11/28/2024

Property Owner: Aaron and Dianna Carvey

Mailing Address: P.O. Box 459 Eureka, MT 59917

Installer: Bradley Persson License #: 159

Approved Work: (Check One) ☒ New Installation ☐ Existing System

☐ Replace Drainfield ☐ Replace Tank ☐ Extension

Describe: Installation of 2nd drainfield for proposed dwelling.

Parcel Description:

Legal: S22, T36 N, R27 W, COS 4070, ACRES 20.211, TRACT 2 IN SE

Property Address: 224 Rock Lake Rd. Rexford, MT 59930 Assessment Code: 53124

DEQ COSA: EQ# Date:

Approved Design Criteria: Installation of new gravity system for 2nd dwelling with 4 Lateral @ 85' with reduction for chambers.

# of Bedrooms: 5 Septic Tank Size: 1500 gallon Trench Width: 24"

# of Laterals: 4 Length of Laterals: 85' Trench Depth: 24"-36"

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET!!

Special Instructions: Install system according to the COSA, lot layout, the Lincoln County Wastewater Treatment and Disposal Regulation, and Circular DEQ-4. Reduction given for chambers. It is the installer's responsibility to ensure that all required horizontal setbacks are met. CHANGES MUST BE PRE-AUTHORIZED BY THE DEPARTMENT.

Issued By: Robin Blumberg, SIT

NOTICE: The Department must be notified at least 3 business days (72 hours) prior to backfilling the system. Call 406-283-2442. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation Ch. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.

Closure Statement:

This system is in compliance with the approved design criteria and Lincoln County's Wastewater Treatment and Disposal Regulation.

Signed: _____ *Date:* _____

_____ Lincoln County Health Department (LCHD) _____ Licensed Installer w/ approval of LCHD


DISCLAIMER

This permit is not a guarantee by the Department that the system will function properly for a prescribed period of time.

SI

Name: Carvey
County: Lincoln
Location: Tract 2 of COS#4070
SE $\frac{1}{4}$ 22-36N-27W

Legend
- test hole
- proposed drainfield site
- proposed replacement area
- proposed well w/100' isloation zone
- provisional mixing zone
- proposed septic tank
- Building site

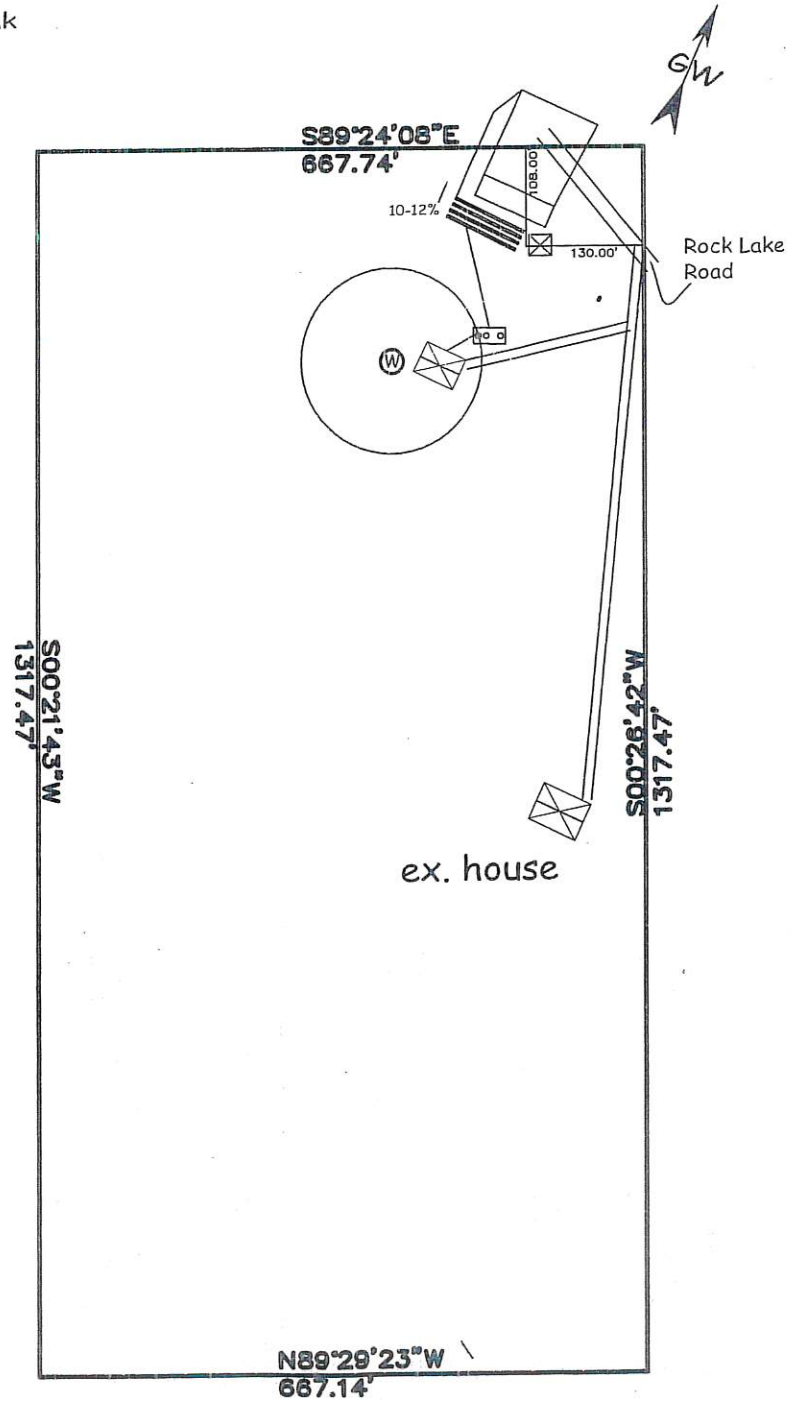

Enviro-Tech
Consulting Inc.
Brian S. Launius
PO Box 5674
Kalispell, MT 59903
(406)257-2795