LINCOLN COUNTY HEALTH DEPARTMENT Permit # 24-19
ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 04/24/2024 Expiration Date: 04/23/2025

Property Owner: William and Fay Fuller

Mailing Address: 136 Grimes Rd., Centralia, WA 98531

Installer: Keith Mack License #: 111

Approved Work: (Check One) ☒ New Installation ☐ Existing System

☐ Replace Drainfield ☐ Replace Tank ☐ Extension

Describe: Installation of new gravity wastewater system.

Legal: WARLAND HEIGHTS, S25, T32 N, R29 W, LOT 50, ACRES 20

Property Address: 572 Warland Heights Rd., Libby, MT 59935 Assessment Code: 19

DEQ COSA: E.Q.# Date:

Approved Design Criteria: Installation of new gravity system with 5 Laterals @ 88' with reduction for chambers. Minimum of 130' from Warland Creek. 3 Bedroom House and Shower House with 100 GPD maximum. 400 GPD total.

# of Bedrooms: 3 +Shower House 100 GPD Septic Tank Size: 1500gallons Trench Width: 24"

# of Laterals: 5 Length of Laterals: 88' Trench Depth: 24"-36"

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET!!

Special Instructions: Install system according to the COSA, lot layout, the Lincoln County Wastewater Treatment and Disposal Regulation, and Circular DEQ-4. Reduction for chambers. It is the installer's responsibility to ensure that all required horizontal setbacks are met. CHANGES MUST BE PRE-AUTHORIZED BY THE DEPARTMENT.

Issued By: *Robin Blumberg, RS*

NOTICE: The Department must be notified at least 3 business days (72 hours) prior to backfilling the system. Call 406-283-2442. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation Ch. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.

Closure Statement:

This system is in compliance with the approved design criteria and Lincoln County's Wastewater Treatment and Disposal Regulation.


Signed: Robin Blumberg *Date:* 5/10/24

____ Lincoln County Health Department (LCHD) ____ Licensed Installer w/ approval of LCHD

This permit is not finalized until the system is inspected and the closure statement is signed.

This permit is not a guarantee that the system will function properly for a prescribed period of time.

5

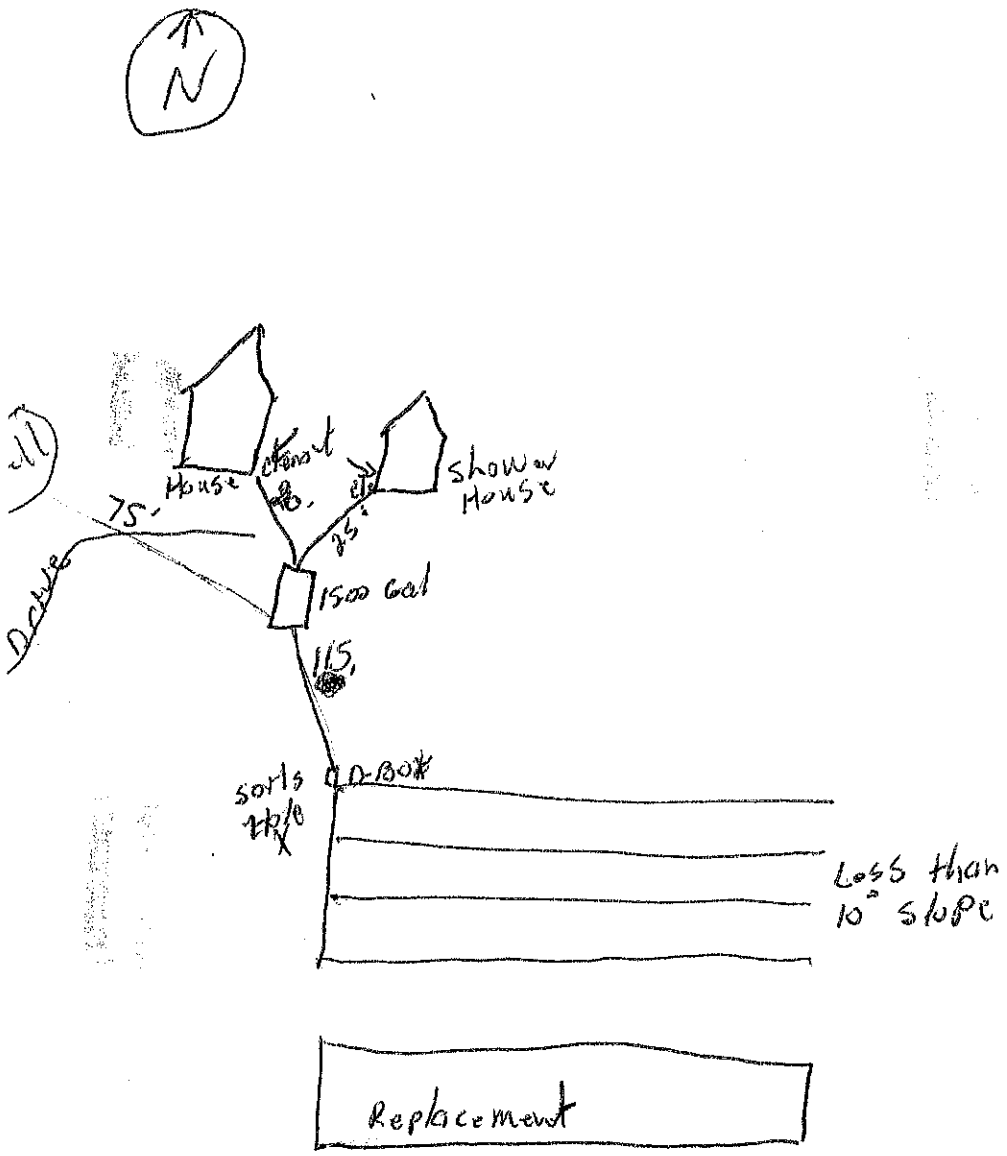

Flood

Warland Creek