LINCOLN COUNTY HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 04/28/2023 Expiration Date: 04/27/2024

Property Owner: Mark Fuqua

Mailing Address: [redacted]

Telephone: [redacted] E-mail: [redacted]

Installer: Koocanusa Excavating, LLC License #: 135

Approved Work: (Check One) ☒ New Installation ☐ Existing System

☐ Replace Drainfield ☐ Replace Tank ☐ Extension

Describe: Pressure dosed, elevated sand mound bed with chambers

Parcel Description:

Legal: S21, T36N, R27W, COS CS#3288, TR 4 in S2NW, 39.602 ACRES

Property Address: 360 Lupus Ln., Rexford MT Assessment Code: 54479

DEQ COSA: Date:

Approved Design Criteria: Pressure dosed, elevated sound mound system per 4/21/23 update.

# of Bedrooms: 4 Septic Tank Size: 1000/500 gallons Sand Mound 80' x 25'

# of Laterals: 3 Length of Laterals: 64'

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET!!

Special Instructions: Install system according to the COSA, lot layout, the Lincoln County Wastewater Treatment and Disposal Regulation, and Circular DEQ-4. It is the installer's responsibility to ensure that all required horizontal setbacks are met. Reduction given for chambers. CHANGES MUST BE PRE-AUTHORIZED BY THE DEPARTMENT.

Issued By: *Robin Blumberg, S17*

NOTICE: The Department must be notified at least 3 business days (72 hours) prior to backfilling the system. Call 406-283-2442. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation Ch. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.

Closure Statement:

This system is in compliance with the approved design criteria and Lincoln County's Wastewater Treatment and Disposal Regulation.


Signed: [signature] *Date:* 5/31/23

____ Lincoln County Health Department (LCHD) ____ Licensed Installer w/ approval of LCHD

DISCLAIMER

This permit is not a guarantee by the Department that the system will function properly for a prescribed period of time.

SV

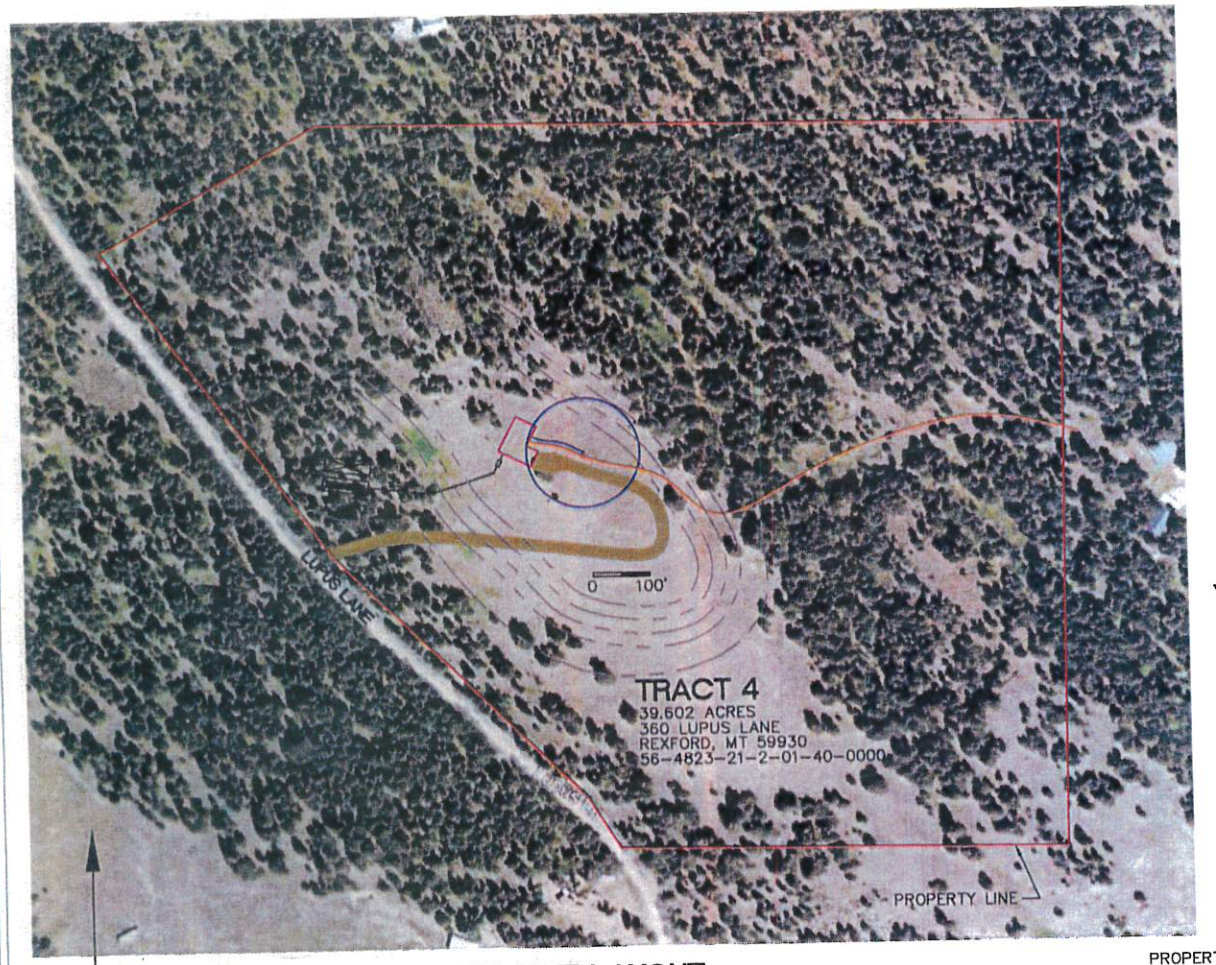


FUQUA SITE LAYOUT



TEST HOLE



TEST HOLE

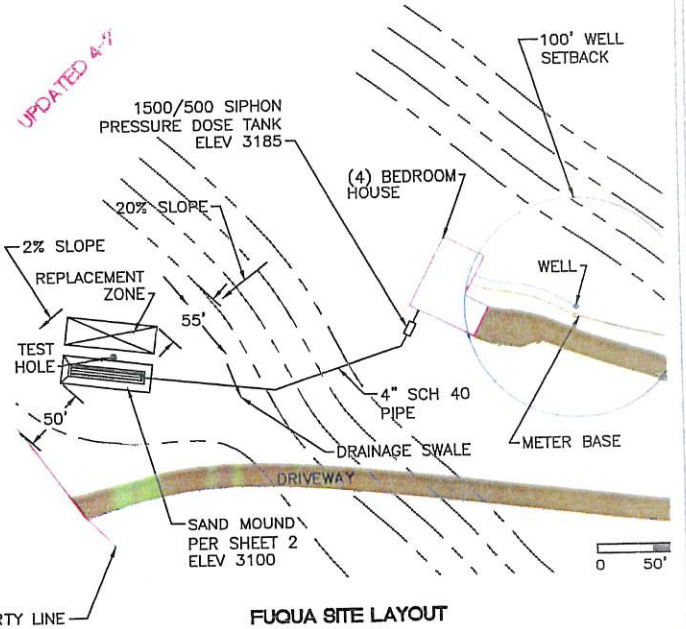

FUQUA SITE LAYOUT

REV	DATE	COMPANY	SCALE:	KOOCANUSA EXCAVATING
		KEI	1/16 & NOTED	FUQUA SEPTIC
		CONTRACT:	DATE: 7/2022	SITE LAYOUT
		VERSION:	WEIGHT	DRAWN: S. MCNAMARA 8/1/22
		PLOT FILE: PML-0091		JOB: 194-001 SHEET: 1

THIS DRAWING IS PROPERTY OF KEI UNTIL CONTRACT HAS BEEN SECURED BETWEEN OWNER & KEI IT CAN NOT BE SUBMITTED TO ANY OTHER PARTIES WITHOUT WRITTEN APPROVAL FROM KEI MANAGEMENT