LINCOLN COUNTY HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 10/18/2023 Expiration Date: 10/17/2024

Property Owner: Joseph Miller

Mailing Address: [redacted]

Telephone: [redacted] E-mail: mtmillr@protonmail.com

Installer: Homeowner License #:

Approved Work: (Check One) ☒ New Installation ☐ Existing System

☐ Replace Drainfield ☐ Replace Tank ☐ Extension

Describe: New gravity system with 4 laterals @ 94'.

Parcel Description:

Legal: S17, T29 N, R30 W, COS 4690, PARCEL B+F, ACRES 9.74

Property Address: 414 Zion Hill Rd. Libby, MT 59923 Assessment Code: 53392

DEQ COSA: EQ#22-2523 Date: 11/23/2022

Approved Design Criteria: New gravity system with 4 laterals @ 94' with a minimum of 5' between trenches and 24" wide trenches and 24"-36" deep trenches.

# of Bedrooms: 2 Septic Tank Size: 1000 gallons Trench Width: 24"

# of Laterals: 4 Length of Laterals: 94' Trench Depth: 24"-36"

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET!!

Special Instructions: Install system according to the COSA, lot layout, the Lincoln County Wastewater Treatment and Disposal Regulation, and Circular DEQ-4. It is the installer's responsibility to ensure that all required horizontal setbacks are met. CHANGES MUST BE PRE-AUTHORIZED BY THE DEPARTMENT.

Issued By: Robin Blumberg, SIT

NOTICE: The Department must be notified at least 3 business days (72 hours) prior to backfilling the system. Call 406-283-2442. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation Ch. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.

Closure Statement:

This system is in compliance with the approved design criteria and Lincoln County's Wastewater Treatment and Disposal Regulation.

Signed: Robin Blumberg Date: 10/15/24

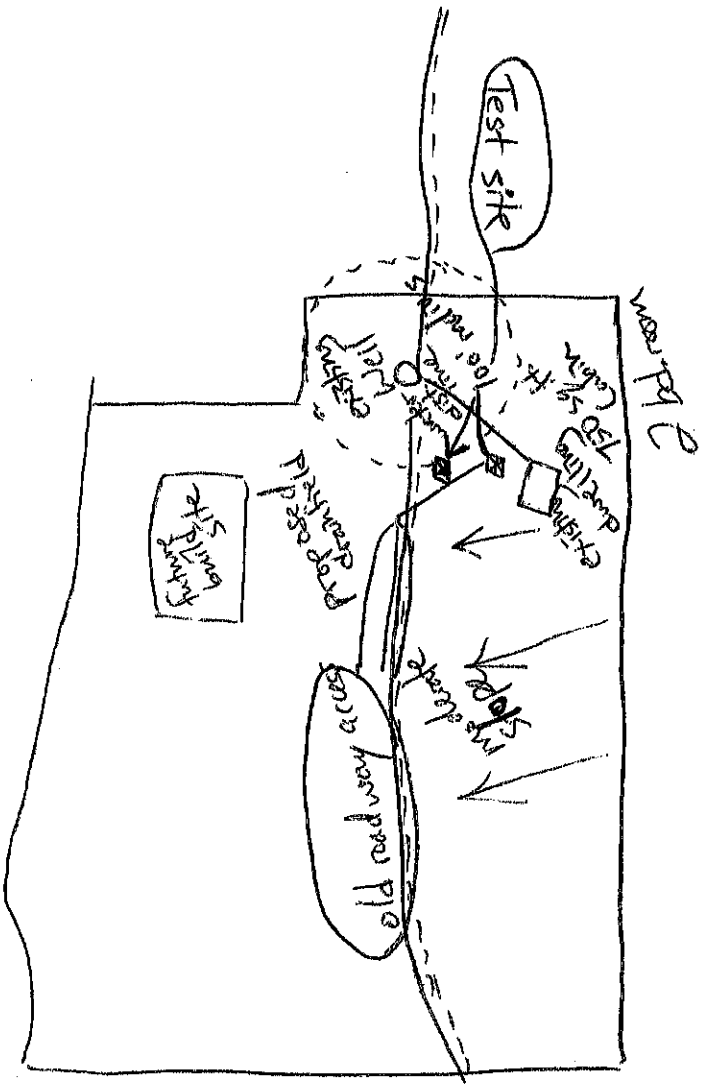
✓ Lincoln County Health Department (LCHD) ____ Licensed Installer w/ approval of LCHD

DISCLAIMER

This permit is not a guarantee by the Department that the system will function properly for a prescribed period of time.

SV

LOT LAYOUT


Test site
Existing building
Proposed dwelling
Existing 750 sq ft dwelling
Septic tank
Proposed pool
Existing pool
Existing dwelling
Existing shed
Existing garage
Old road way access
Existing shed
Existing garage