LINCOLN COUNTY HEALTH DEPARTMENT Permit # 23-55034
ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 05/18/2023 Expiration Date: 05/17/2024

Property Owner: Tami Rasmussen-Curley

Mailing Address: [redacted]

Telephone: [redacted] E-mail:

Installer: Patriot Property Services License #: 196

Approved Work: (Check One) ☒ New Installation ☐ Existing System

☐ Replace Drainfield ☐ Replace Tank ☐ Extension

Describe: Installation of pressure dosed system with chambers.

Parcel Description:

Legal: PINES AT FISHER RIVER LOT8, S13, T27 N, R 28 W, ACRES 5.523, PM 6807

Property Address: 525 Brookie Way, Libby, MT 59923 Assessment Code: 55034

DEQ COSA: E.Q.#07-1610 Date: 6/28/2007

Approved Design Criteria: Pressure dosed system in the approved location.

# of Bedrooms: 2	Septic Tank Size: 1000/500 gallons	Trench Width: 36"
# of Laterals: 4	Length of Laterals: 48'	Trench Depth: 24"-36"

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET!!

Special Instructions: Install system according to the COSA, lot layout, the Lincoln County Wastewater Treatment and Disposal Regulation, and Circular DEQ-4. It is the installer's responsibility to ensure that all required horizontal setbacks are met. Reduction given for chambers. CHANGES MUST BE PRE-AUTHORIZED BY THE DEPARTMENT.

Issued By: Robin Blumberg, SIT

NOTICE: The Department must be notified at least 3 business days (72 hours) prior to backfilling the system. Call 406-283-2442. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation Ch. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.

Closure Statement:

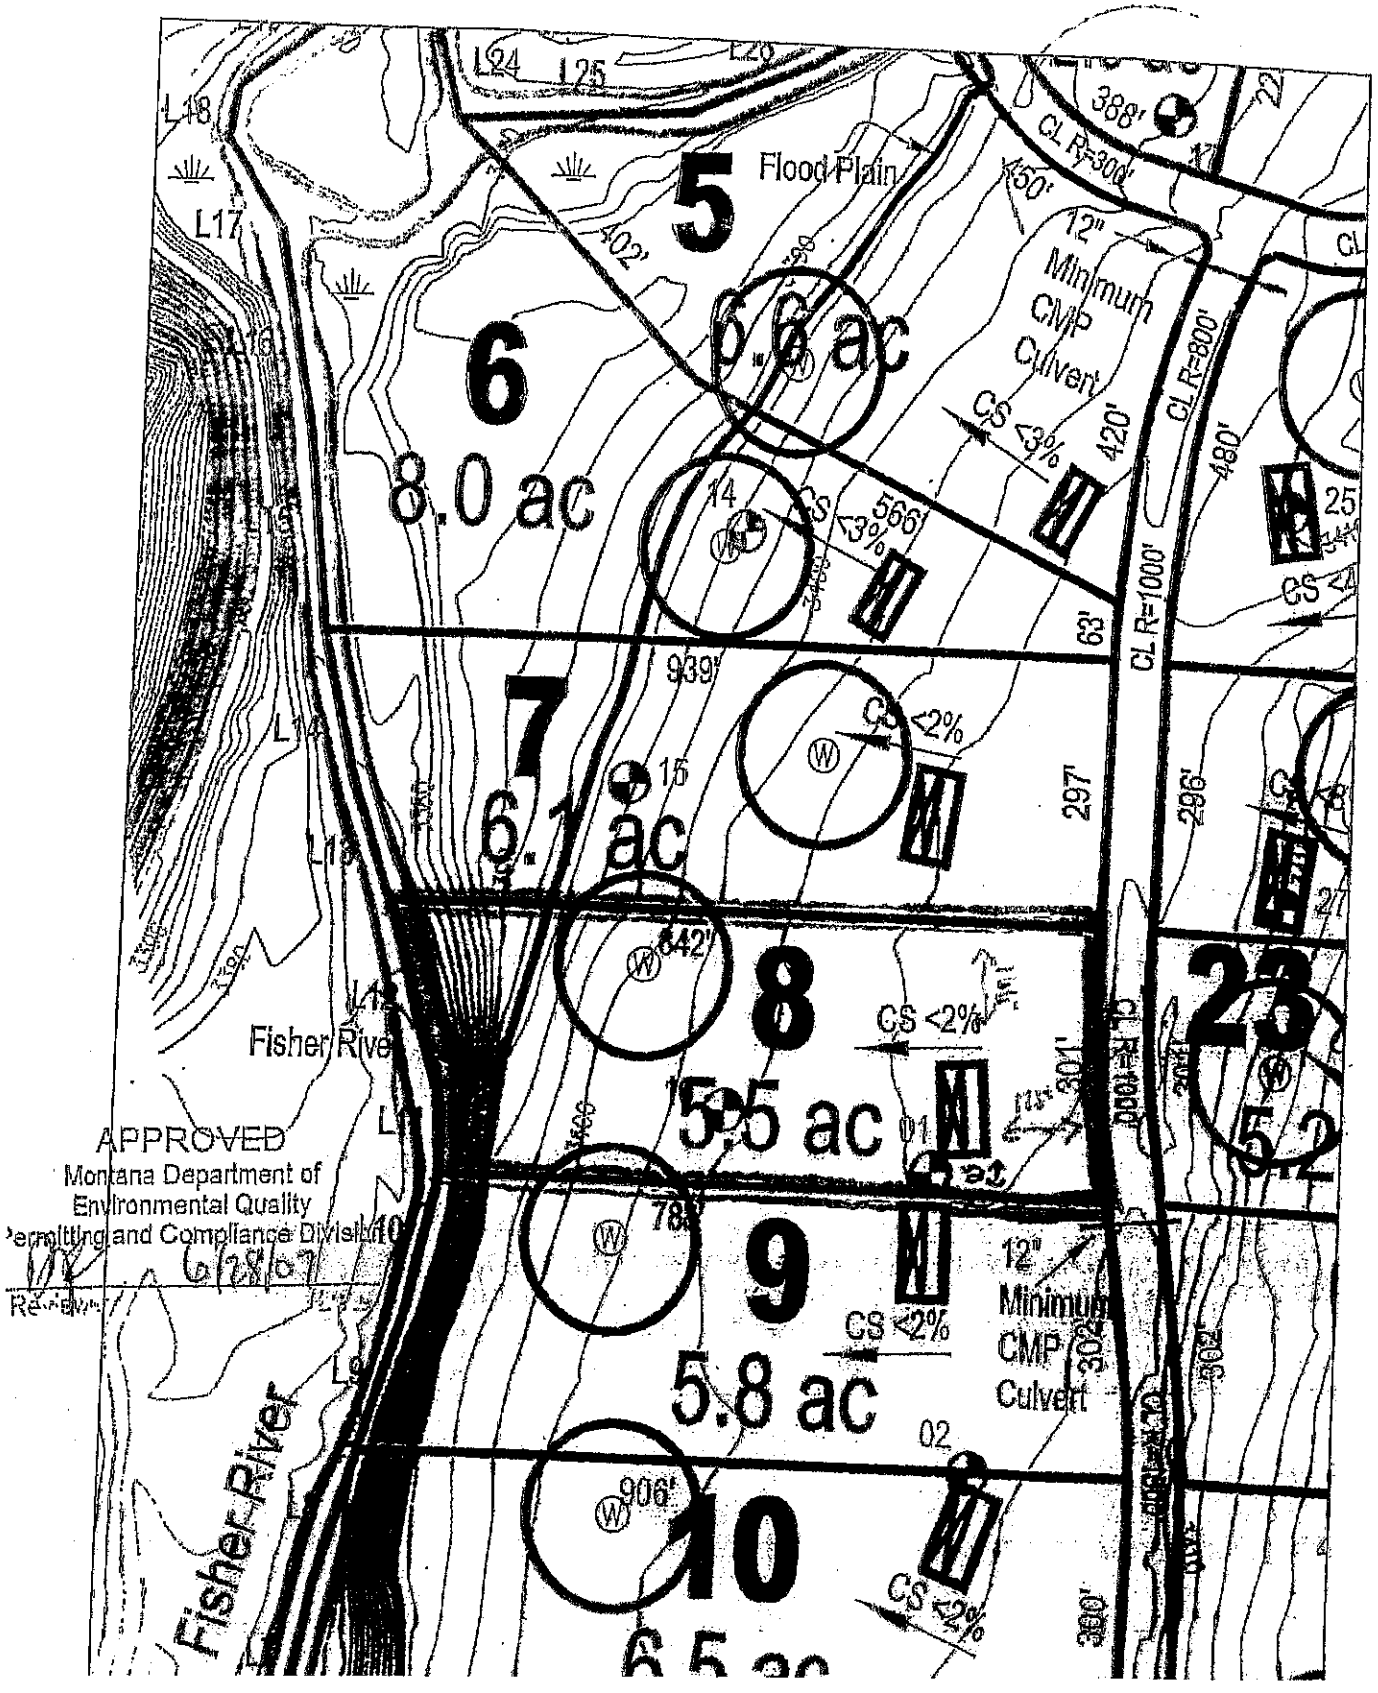
This system is in compliance with the approved design criteria and Lincoln County's Wastewater Treatment and Disposal Regulation.

Signed: Robin Blumberg Date: 6/22/23

✓ Lincoln County Health Department (LCHD) ____ Licensed Installer w/ approval of LCHD

This permit is not finalized until the system is inspected and the closure statement is signed.

This permit is not a guarantee that the system will function properly for a prescribed period of time.


5
Flood Plain
6
8.0 ac
6.6 ac
7
6.1 ac
8
5.5 ac
9
5.8 ac
10
23
5.2
CL R=300'
CL R=800'
CL R=1000'
12" Minimum CMP Culvert
CS <3%
CS <2%
Fisher River
Fisher River
APPROVED
Montana Department of
Environmental Quality
Permitting and Compliance Division