LINCOLN COUNTY HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 07/26/2022 Expiration Date: 07/26/2023

Property Owner: John Brown

Mailing Address: [redacted]

Telephone: [redacted] Email:

Installer: Unknown License #:

Proposed Work: (Check One) ☒ New Installation ☐ Existing System

☐ Replace Drainfield ☐ Replace Tank ☐ Extension

Describe: Sand-lined, Pressure-dosed system with 2 – 94' lateral using 2' wide trenches

Parcel Description:

Legal: S17, T34 N, R33 W, GREAT NORTHERN MINING CLAIMS MS #5223 15.610 ACRES

Property Address: Redtop Cyclone Rd. Assessment Code: 0000000456

Approved Design Criteria:

# of Bedrooms: 3 Septic Tank Size: 1000 +500 gallons Drainfield Size: 376 square feet

# of Laterals: 2 Length of Laterals: 94 Trench Depth: 24-36 inches +12 inches sand

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET!!

Special Instructions: Install system according to the lot layout, the Lincoln County Wastewater Treatment and Disposal Regulation, and Circular DEQ-4. ANY CHANGES MUST BE PRE-AUTHORIZED BY THE DEPARTMENT.

Issued By: *Jesse Haag*

NOTICE: The Department must be notified at least 3 business days (72 hours) prior to backfilling the system. Call 406-283-2442. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation Ch. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.

Closure Statement:


I, _____, have inspected this system and found it to be in compliance with the approved design criteria and Lincoln County's Wastewater Treatment and Disposal Regulation.

Signed: _____ *Date:* _____

_____ Lincoln County Health Department (LCHD) _____ Licensed Installer w/ approval of LCHD

DISCLAIMER

This permit is not a guarantee by the Department that the system will function properly for a prescribed period of time.

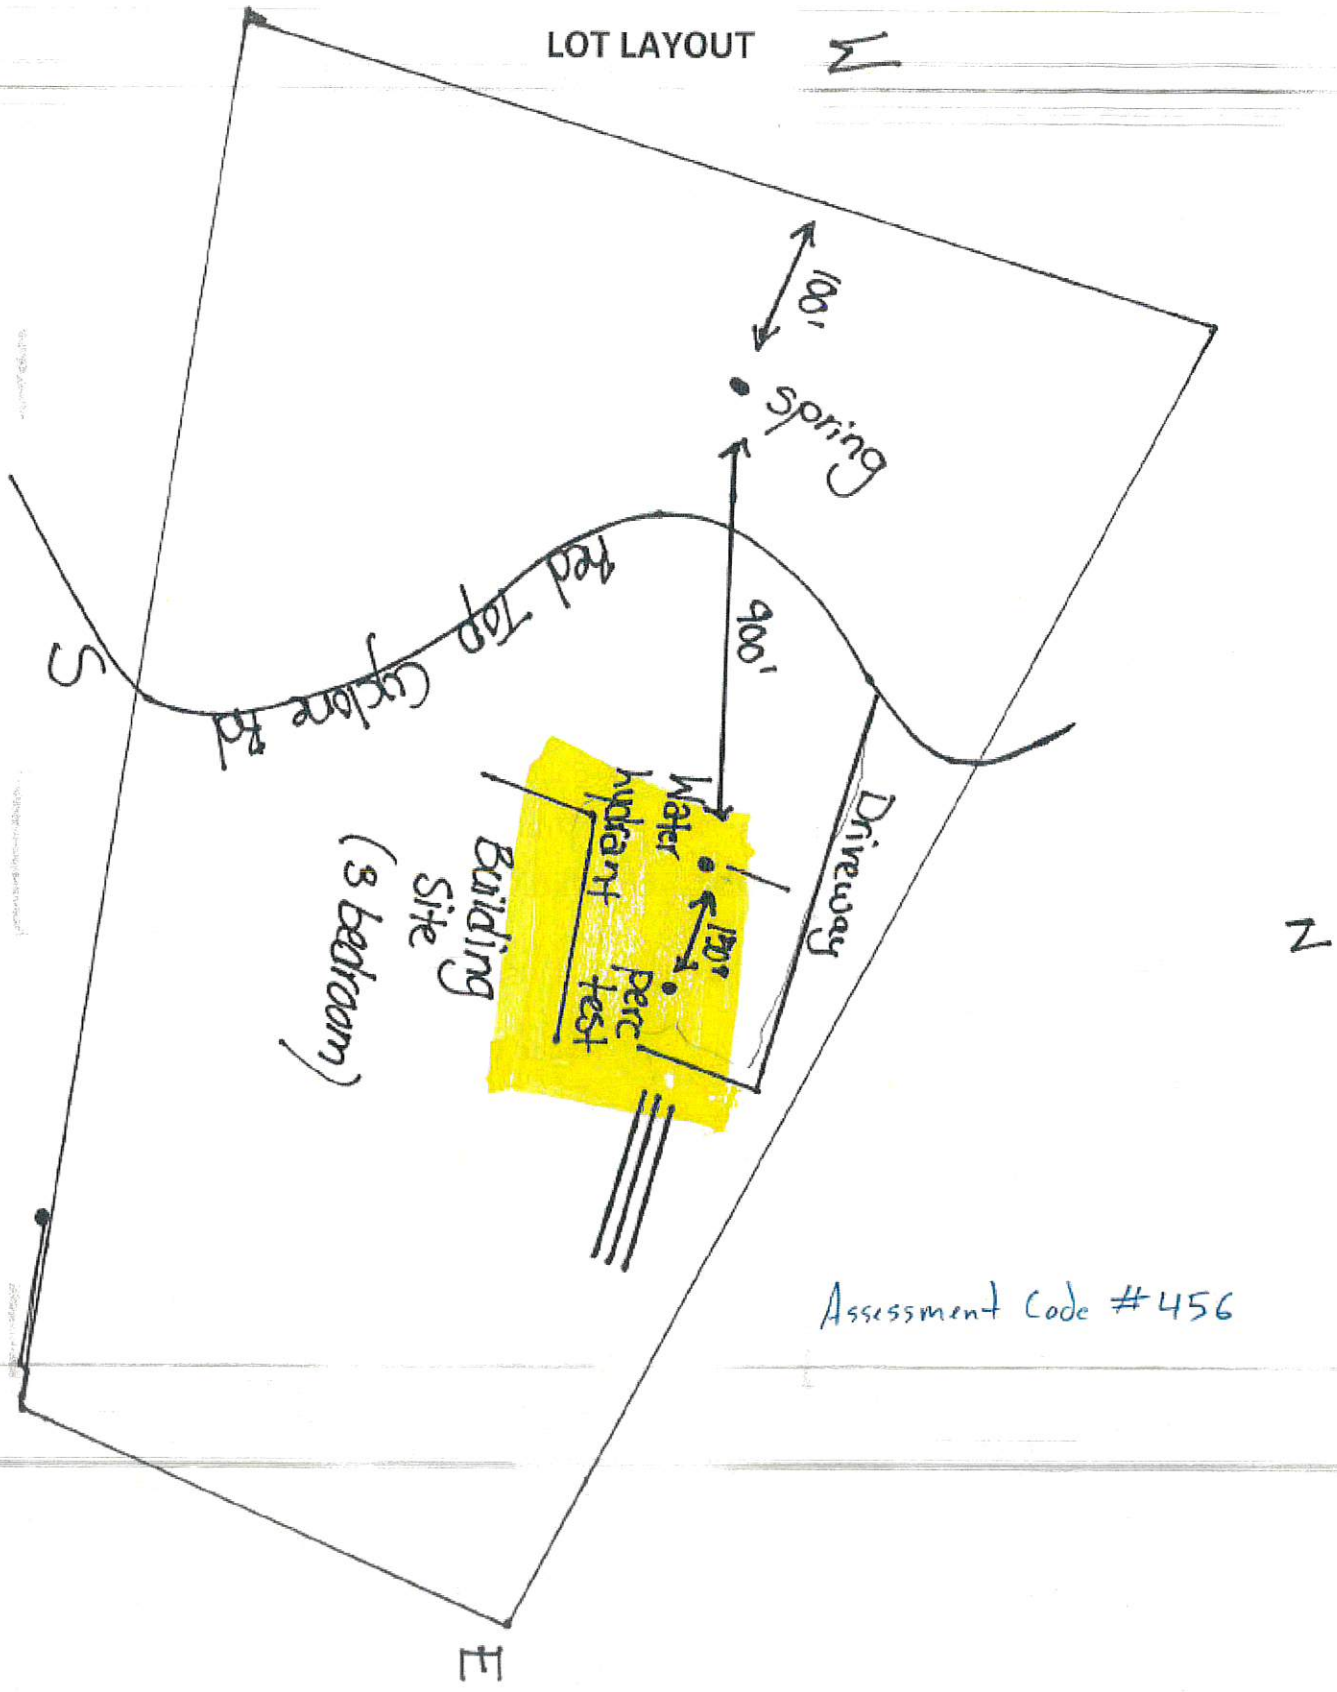

Assessment Code #456