LINCOLN COUNTY HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 7/8/2022 Expiration Date: 7/7/2023

Property Owner: John Kaemmerling

Mailing Address: [redacted]

Telephone: [redacted] Email:

Installer: Riley Excavating License #: 147

Proposed Work: (Check One) ☒ New Installation ☐ Existing System

☐ Replace Drainfield ☐ Replace Tank ☐ Extension

Describe: new system for 5th wheel, standard trenches, gravity flow, chambers.

Parcel Description:

Legal: S31 T29N R26W, Island Lake, Lot 1

Property Address: Old Railroad Grade Rd, Libby Assessment Code: 53985

Approved Design Criteria:

# of Bedrooms: 2 Septic Tank Size: 1000 gallons Drainfield Size: 300 square feet

# of Laterals: 2 Length of Laterals: 75 lineal feet Trench Depth: 24-36 inches

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET!!

Special Instructions: Install system according to the COSA, lot layout, the Lincoln County Wastewater Treatment and Disposal Regulation, and Circular DEQ-4. 20% reduction for chambers at 0.6 app rate. ANY CHANGES MUST BE PRE-AUTHORIZED BY THE DEPARTMENT.

Issued By: *Kathi J. Hooper, R.S.*

NOTICE: The Department must be notified at least 3 business days (72 hours) prior to backfilling the system. Call 406-283-2442. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation Ch. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.

Closure Statement:

This system is in compliance with the approved design criteria and Lincoln County's Wastewater Treatment and Disposal Regulation.

Signed: _____ *Date:* _____


_____ Lincoln County Health Department (LCHD) _____ Licensed Installer w/ approval of LCHD

DISCLAIMER

This permit is not a guarantee by the Department that the system will function properly for a prescribed period of time.

B

LOT LAYOUT

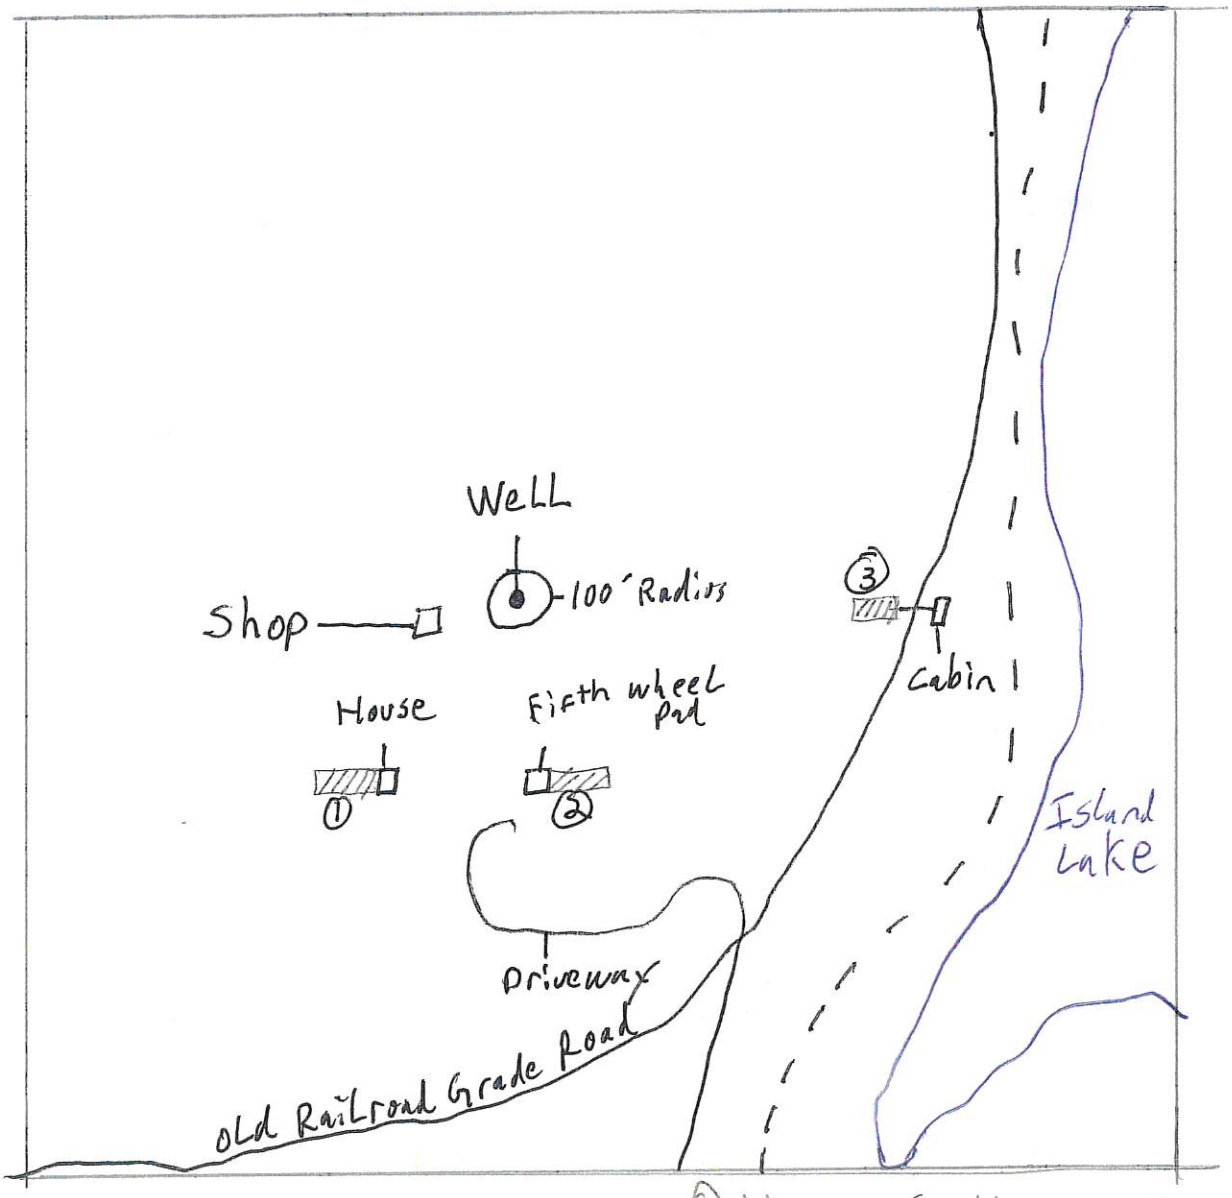

— Lake
---- Flood Plain
— Old Railroad Grade Rd
Driveway
▨ Drain Field

① House Septic <15% slope
4,66 Aug MPI
③ 70' Infiltrators
10' W of House

② Fifth wheel Septic <15% slope
6.67 Aug MPI
③ 70' Infiltrators
10' E of Pad

③ Cabin Septic <15% slope ③ 70'
6.33 Aug MPI 200' W of Cabin Infiltrato