LINCOLN COUNTY HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 10/4/22 Expiration Date: 10/3/2023

Property Owner: Craig & Travis Schelling

Mailing Address: [redacted]

Telephone: [redacted] E-mail:

Installer: Mountain Contracting License #: 3

Approved Work: (Check One) ☒ New Installation ☐ Existing System

☐ Replace Drainfield ☐ Replace Tank ☐ Extension

Describe: Pressure dosed system with chambers

Parcel Description:

Legal: S35 T35N R26W, COS 2609, Parcel B&C, 40.06 acres

Property Address: 318 Eagle Loop, Fortine Assessment Code: 14074

Approved Design Criteria:

# of Bedrooms: 5 Septic Tank Size: 1500/500 gallons Trench Width: 36 inches

# of Laterals: 4 Length of Laterals: 86 lineal feet Trench Depth: 24 inches

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET!!

Special Instructions: Install system according to the COSA, lot layout, the Lincoln County Wastewater Treatment and Disposal Regulation, and Circular DEQ-4. Reduction given for chambers. CHANGES MUST BE PRE-AUTHORIZED BY THE DEPARTMENT.

Issued By: *Kathi J. Hooper, R.S.*

NOTICE: **The Department must be notified at least 3 business days (72 hours) prior to backfilling the system.** Call 406-283-2442. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation Ch. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.

Closure Statement:

- *This system is in compliance with the approved design criteria and Lincoln County's Wastewater Treatment and Disposal Regulation.*

Signed: _____ *Date:* 11/23/2022

____ Lincoln County Health Department (LCHD) ✓ Licensed Installer w/ approval of LCHD


DISCLAIMER

This permit is not a guarantee by the Department that the system will function properly for a prescribed period of time.

Legend

- test hole
- proposed drainfield site
- proposed replacement area
- existing well w/100' isloation zone
- source specific mixing zone
- proposed & existing septic tank

Name: Schelling
County: Lincoln
Location: sec.35-T35N-R26W
Tracts 6 & 7A COS#2609

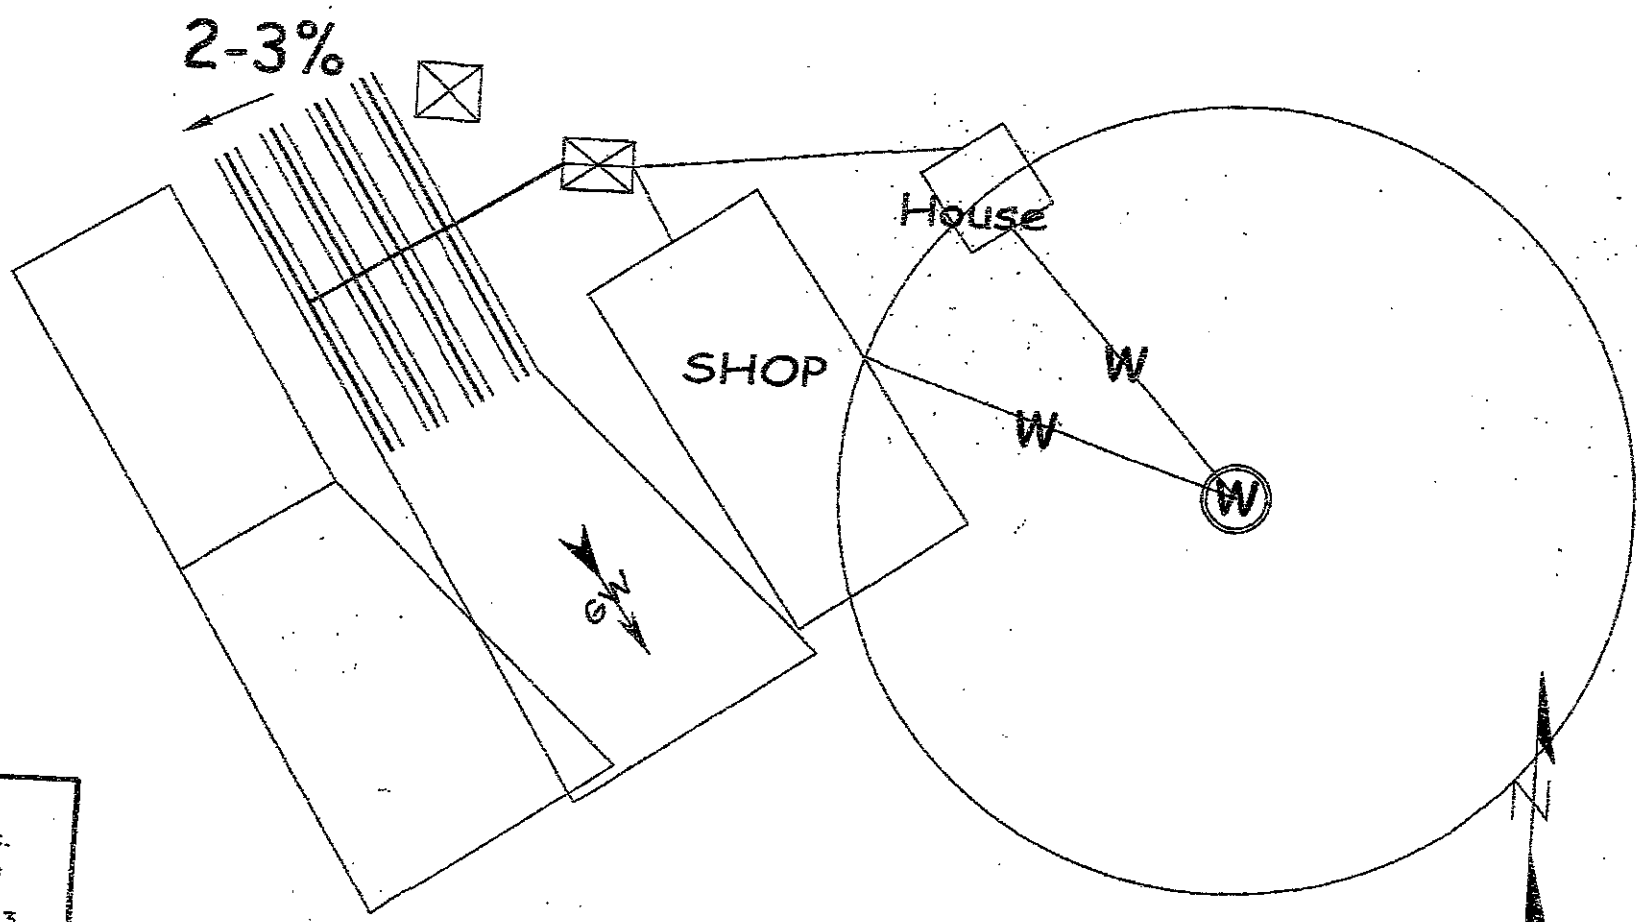

Enviro-Tech
Consulting Inc.
Brian S. Launius
PO Box 5674
Kalispell, MT 59903
(406)257-2795

1" = 50'