Permit 25-55952

LINCOLN COUNTY HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 01/27/2025 Expiration Date: 01/26/2026

Property Owner: Don and Margaret Truman

Mailing Address: [redacted]

Installer: Donavan Truman License #: 109

Approved Work: (Check One) ☒ New Installation ☐ Existing System

☐ Replace Drainfield ☐ Replace Tank ☐ Extension

Describe: Installation of Effluent Lift Tank and connection to Main.

Legal: MARINERS HAVEN PH 1, S11, T36 N, R28 W, ACRES 0.527, LOT 13 PM 7151

Property Address: 115 Abayence Bay Loop, Rexford, MT 59930 Assessment Code: 55952

DEQ COSA: E.Q.# Date:

Approved Design Criteria: Installation of Effluent Lift Tank and connection to Main. For 3 Bedroom RV 300 gallons per day.

# of Bedrooms: 3 Septic Tank Size: 300 gallon solid pump tank Trench Width:

# of Laterals: Length of Laterals: Trench Depth:

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET!!

Special Instructions: Install system according to the COSA, lot layout, the Lincoln County Wastewater Treatment and Disposal Regulation, and Circular DEQ-4. It is the installer's responsibility to ensure that all required horizontal setbacks are met. CHANGES MUST BE PRE-AUTHORIZED BY THE DEPARTMENT.

Issued By: *Robin Blumberg, RS*

NOTICE: The Department must be notified at least 3 business days (72 hours) prior to backfilling the system. Call 406-283-2442. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation Ch. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.


Closure Statement:

This system is in compliance with the approved design criteria and Lincoln County's Wastewater Treatment and Disposal Regulation.

Signed: Robin Blumberg *Date:* 5/29/25

This permit is not finalized until the system is inspected and the closure statement is signed.

This permit is not a guarantee that the system will function properly for a prescribed period of time.

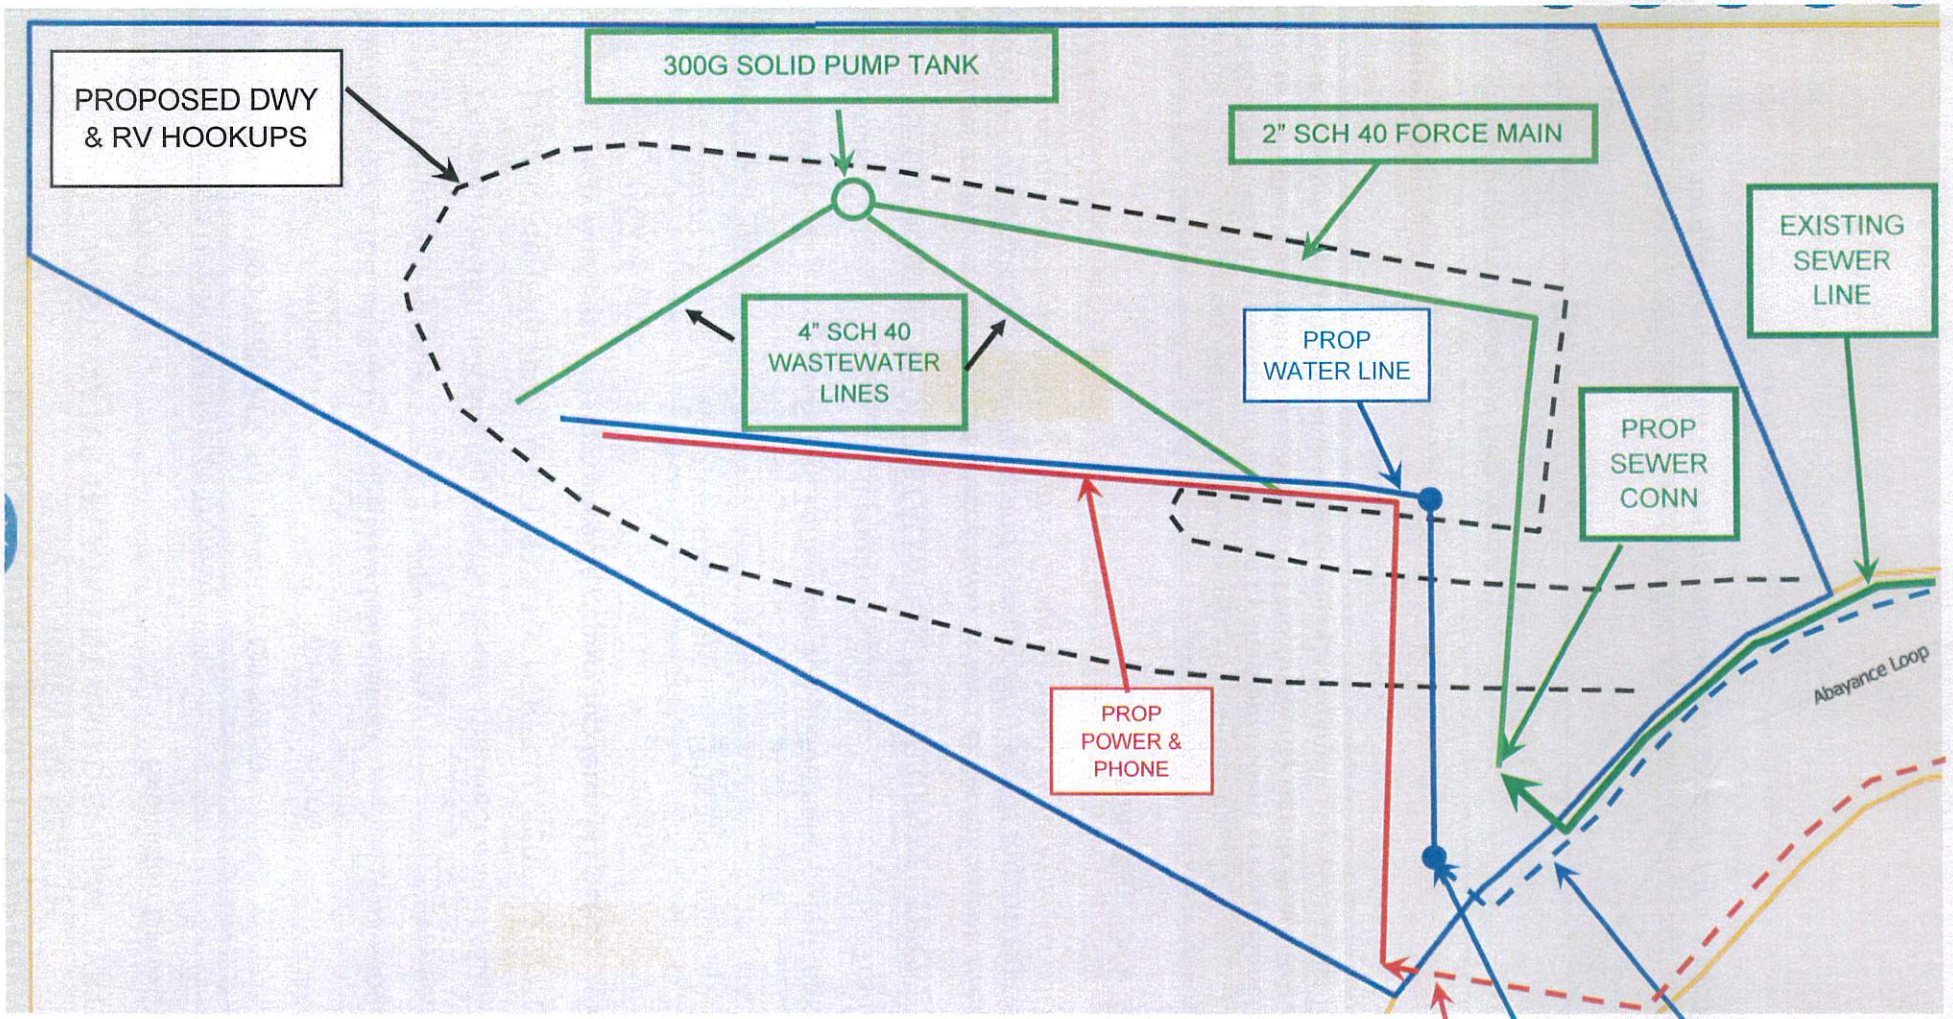

- **CONNECTION TO COMMUNITY SYSTEM**
- 2" SCH 40 FORCE MAIN
- 300 GAL SOLIDS PUMP TANK
- SOLIDS PUMP—ASHLAND SW50