LINCOLN COUNTY
DEPARTMENT OF ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 06/23/2010 Expiration Date: 06/24/2011

Property Owner: Joan G. Best & Harold P. Rayner c/o:

Address: [redacted]

Telephone: (Home) [redacted] (Work)

Installer: Riley Excavating License No. 147

__XX__ New Installation _____ Existing System

_____ Repair _____ Replacement _____ Extension _____ Other

Describe: Constructing 1-bedroom residence but sizing system for up to 3 bedrooms. Lift station will be required to transport effluent from tank to approved drainfield site.

Parcel Description:

Legal: NE-1/4 NE-1/4 S27 T30 R31

Address or Location: 1945 Snowshoe Road

Approved Design Criteria:

Bedrooms : 3 Septic Tank Size: 1000 gallons Drainfield Size: 300 Linear Feet

Lift Station Tank Size: 500 gallons

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET !!

Special Instructions: INSTALL SYSTEM ACCORDING TO LAYOUT, DEQ-4 AND LINCOLN COUNTY WASTEWATER REGULATION #3. ANY DEVIATIONS FROM APPROVED PLAN MUST BE AUTHORIZED BY THE DEPARTMENT.

Issued By: *Kendra J. Lind, R.S.*

Closure Statement:

I, _____, have inspected this system and found it to be in compliance with the conditions of the permit, and the Lincoln County Wastewater Treatment and Disposal Regulation.

Signed: _____ *Date:* _____

Title: _____

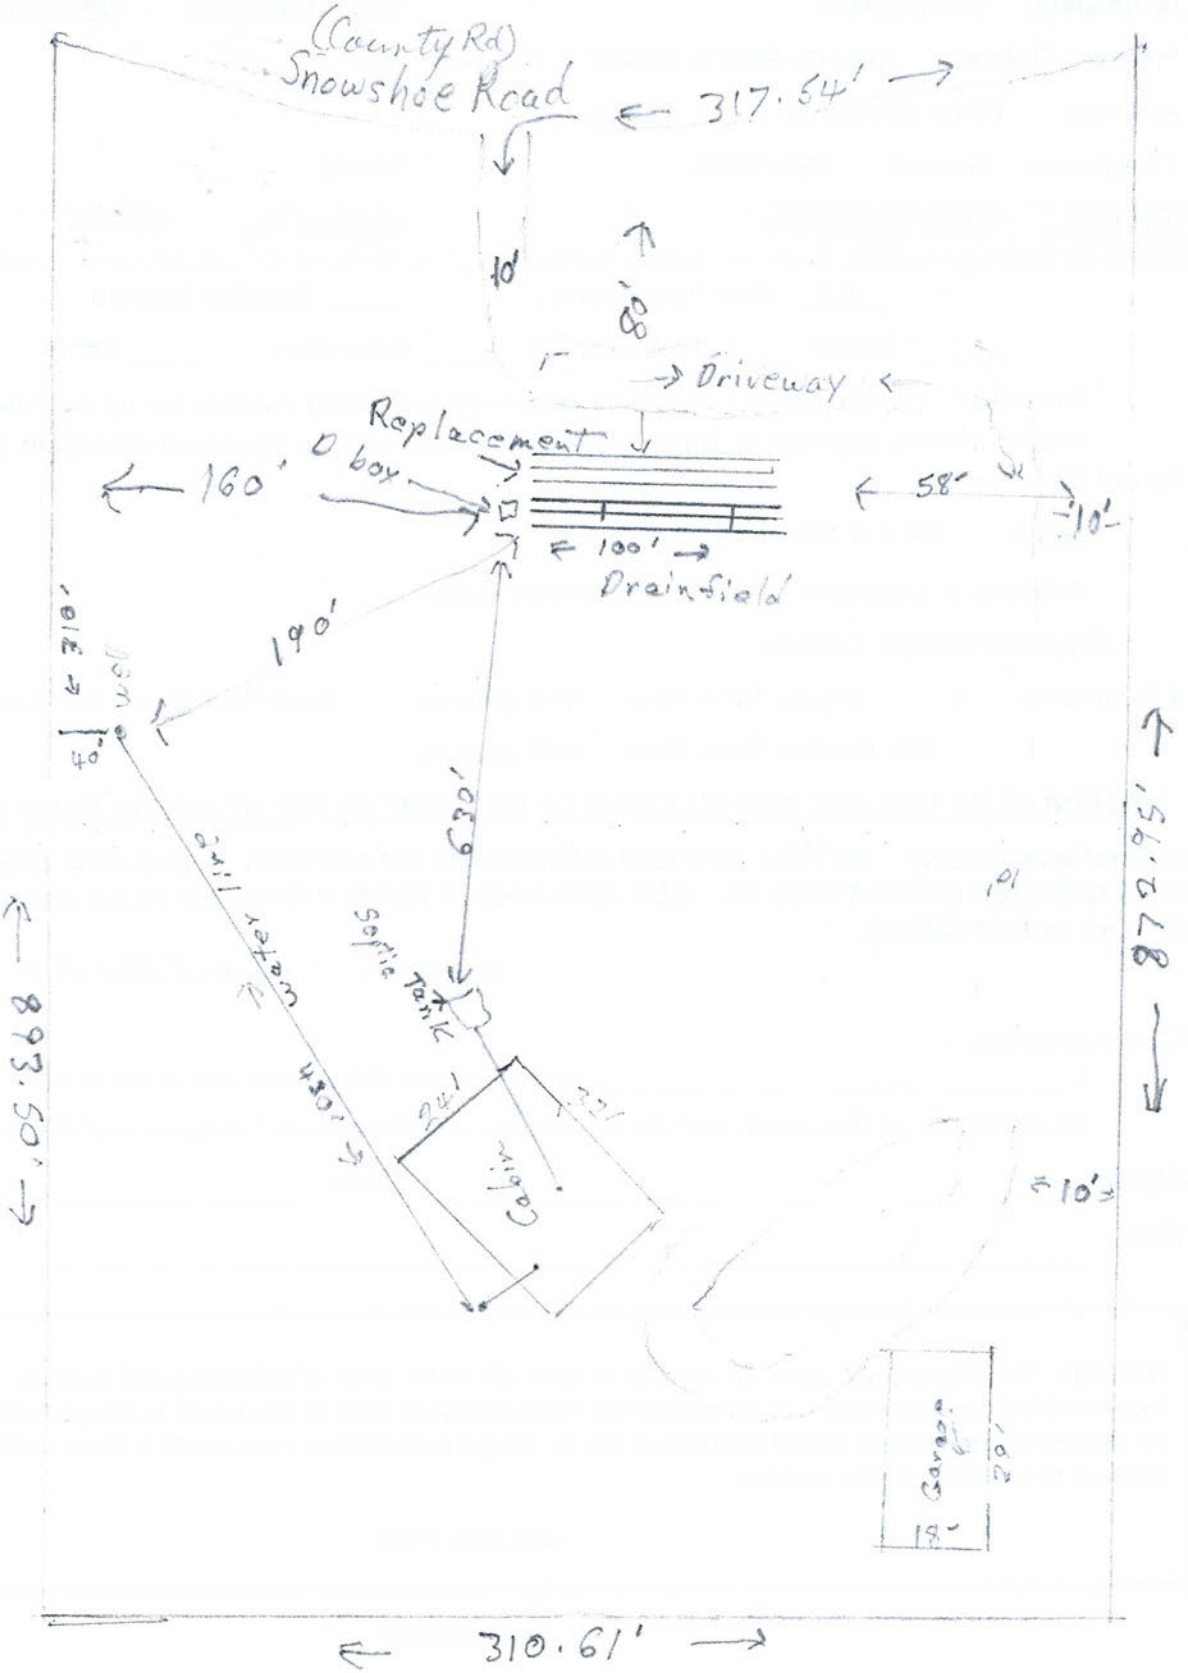
NOTICE: The Department must be notified at least 48 hours prior to backfilling the system. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation No. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.

406-293-7781

DISCLAIMER

This permit is not a guarantee by the Department that the system will function properly for a prescribed period of time.

LOT LAYOUT


(County Rd)
Snowshoe Road
317.54'
10'
8'
Driveway
Replacement
O box
160'
58'
10'
100'
Drainfield
190'
210'
40'
well
630'
water line
430'
Septic Tank
24'
32'
Cabin
872.75'
10'
805.58'
Garage
20'
18'
310.61'