LINCOLN COUNTY
DEPARTMENT OF ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 12/23/2009 Expiration Date: 12/24/2010

Property Owner: Don & Yvonne Doolan c/o: Davis Surveying, Inc.

Address: [redacted]

Telephone: (Home) (Work)

Installer: License No.

__XX__ New Installation _____ Existing System

_____ Repair _____ Replacement _____ Extension _____ Other

Describe: Installing elevated sand mound system

Parcel Description:

Legal: S35 T37 R28

Address or Location: Parcel B of COS No. 3970RB

Approved Design Criteria:

Bedrooms: 3 Septic Tank Size: 1000 gallons Drainfield Size: 112 Linear Feet

Dosing Tank Size: 500 gallons

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET !!

Special Instructions: INSTALL ELEVATED SAND MOUND SYSTEM ACCORDING TO LAYOUT, DAVIS SURVEYING DETAIL DRAWINGS, DEQ-4 AND LINCOLN COUNTY WASTEWATER REGULATION #3. ANY DEVIATIONS FROM APPROVED PLAN MUST BE AUTHORIZED BY THE DEPARTMENT.

Issued By: *Kendra J. Lind, R.S.*

Closure Statement:

I, _____, have inspected this system and found it to be in compliance with the conditions of the permit, and the Lincoln County Wastewater Treatment and Disposal Regulation.

Signed: _____ *Date:* _____

Title: _____


NOTICE: The Department must be notified at least 48 hours prior to backfilling the system. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation No. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.

406-293-7781

DISCLAIMER

This permit is not a guarantee by the Department that the system will function properly for a prescribed period of time.


LINCOLN COUNTY, MONTANA
SEPTIC TANK PERMIT
PARCEL B OF C.O.S. NO. 3970RB
IN THE N1/2 SE1/4 NE1/4 OF SECTION 35,
TWP. 37 N., R. 28 W., P.M.M.
FOR: DON & YVONNE DOOLAN DATE: SEPTEMBER 2009



ALONG THE UPPER DITCH LINES OF APPROACH ROADS

LEGEND

- SOILS PROFILE
- PERCOLATION SITE
- PROPOSED WELL SITE
- PROPOSED BUILDING SITE
- STORMWATER POND 15'x 20'x 2'
- SLOPE
- GRADIENT DIRECTION
- PROPOSED SEPTIC SITE 2-56' TRENCHES 7' APART
- REPLACEMENT SITE 2-56' TRENCHES 7 APART
- 100' MIXING ZONE

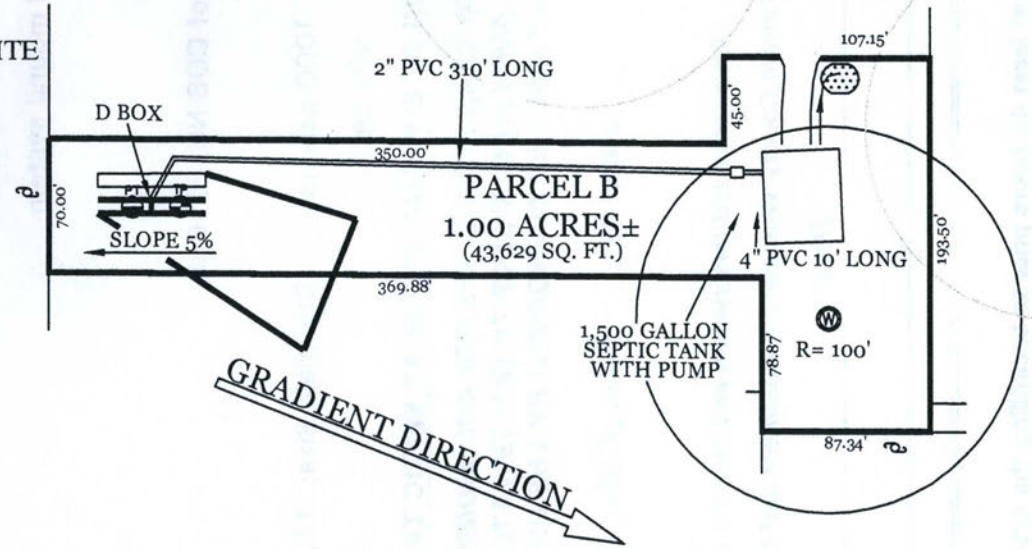

NO WELLS OR SEPTICS WITHIN 100' OF PROPERTY BOUNDARIES OTHER THAN THOSE SHOWN

ELEVATED SAND MOUND
2-56' TRENCHES
7' APART

SCALE
1 INCH = 100 FT.

Davis Surveying Inc.
TROY MONTANA, (406)295-5441

DATE: 09/11/09	Land Projects 2009
DRAWN BY: MDM	FILE:T37R2835.DWG