LINCOLN COUNTY HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 06/02/2025 Expiration Date: 06/01/2026 Permit#25-Kenyon

Property Owner: Shawn Kenyon

HansenMailing Address: 17616 161 St. SE, Monroe, WA 98272

Installer: Marty Goucher License #: 196

Approved Work: (Check One) ☒ New Installation ☐ Existing System

☐ Replace Drainfield ☐ Replace Tank ☐ Extension

Describe: Installation of new pressure dosed system for 4 Bedroom House.

Legal: S15, T26 N, R29 W, COS 4984, Parcel 18101

Property Address: 1889 Houghton Creek Rd., Libby, MT 59923 Assessment Code: 14478

DEQ COSA: E.Q.# Date:

Approved Design Criteria: Installation of new pressure dosed system for 4 Bedroom House with 2 Laterals @ 100' with reduction for chambers.

# of Bedrooms: 4 Septic Tank Size: 1500/500 Trench Width: 36"

# of Laterals: 2 Length of Laterals: 100' Trench Depth: 24"-36"

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET!!

Special Instructions: Install system according to the lot layout, the Lincoln County Wastewater Treatment and Disposal Regulation, Circular DEQ-4, and COSA(If Applies). Reduction given for chambersIt is the installer's responsibility to ensure that all required horizontal setbacks are met. CHANGES MUST BE PRE-AUTHORIZED BY THE DEPARTMENT.

Issued By: *Robin Blumberg, RS*

NOTICE: The Department must be notified at least 3 business days (72 hours) prior to backfilling the system. Call 406-283-2442. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation Ch. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.

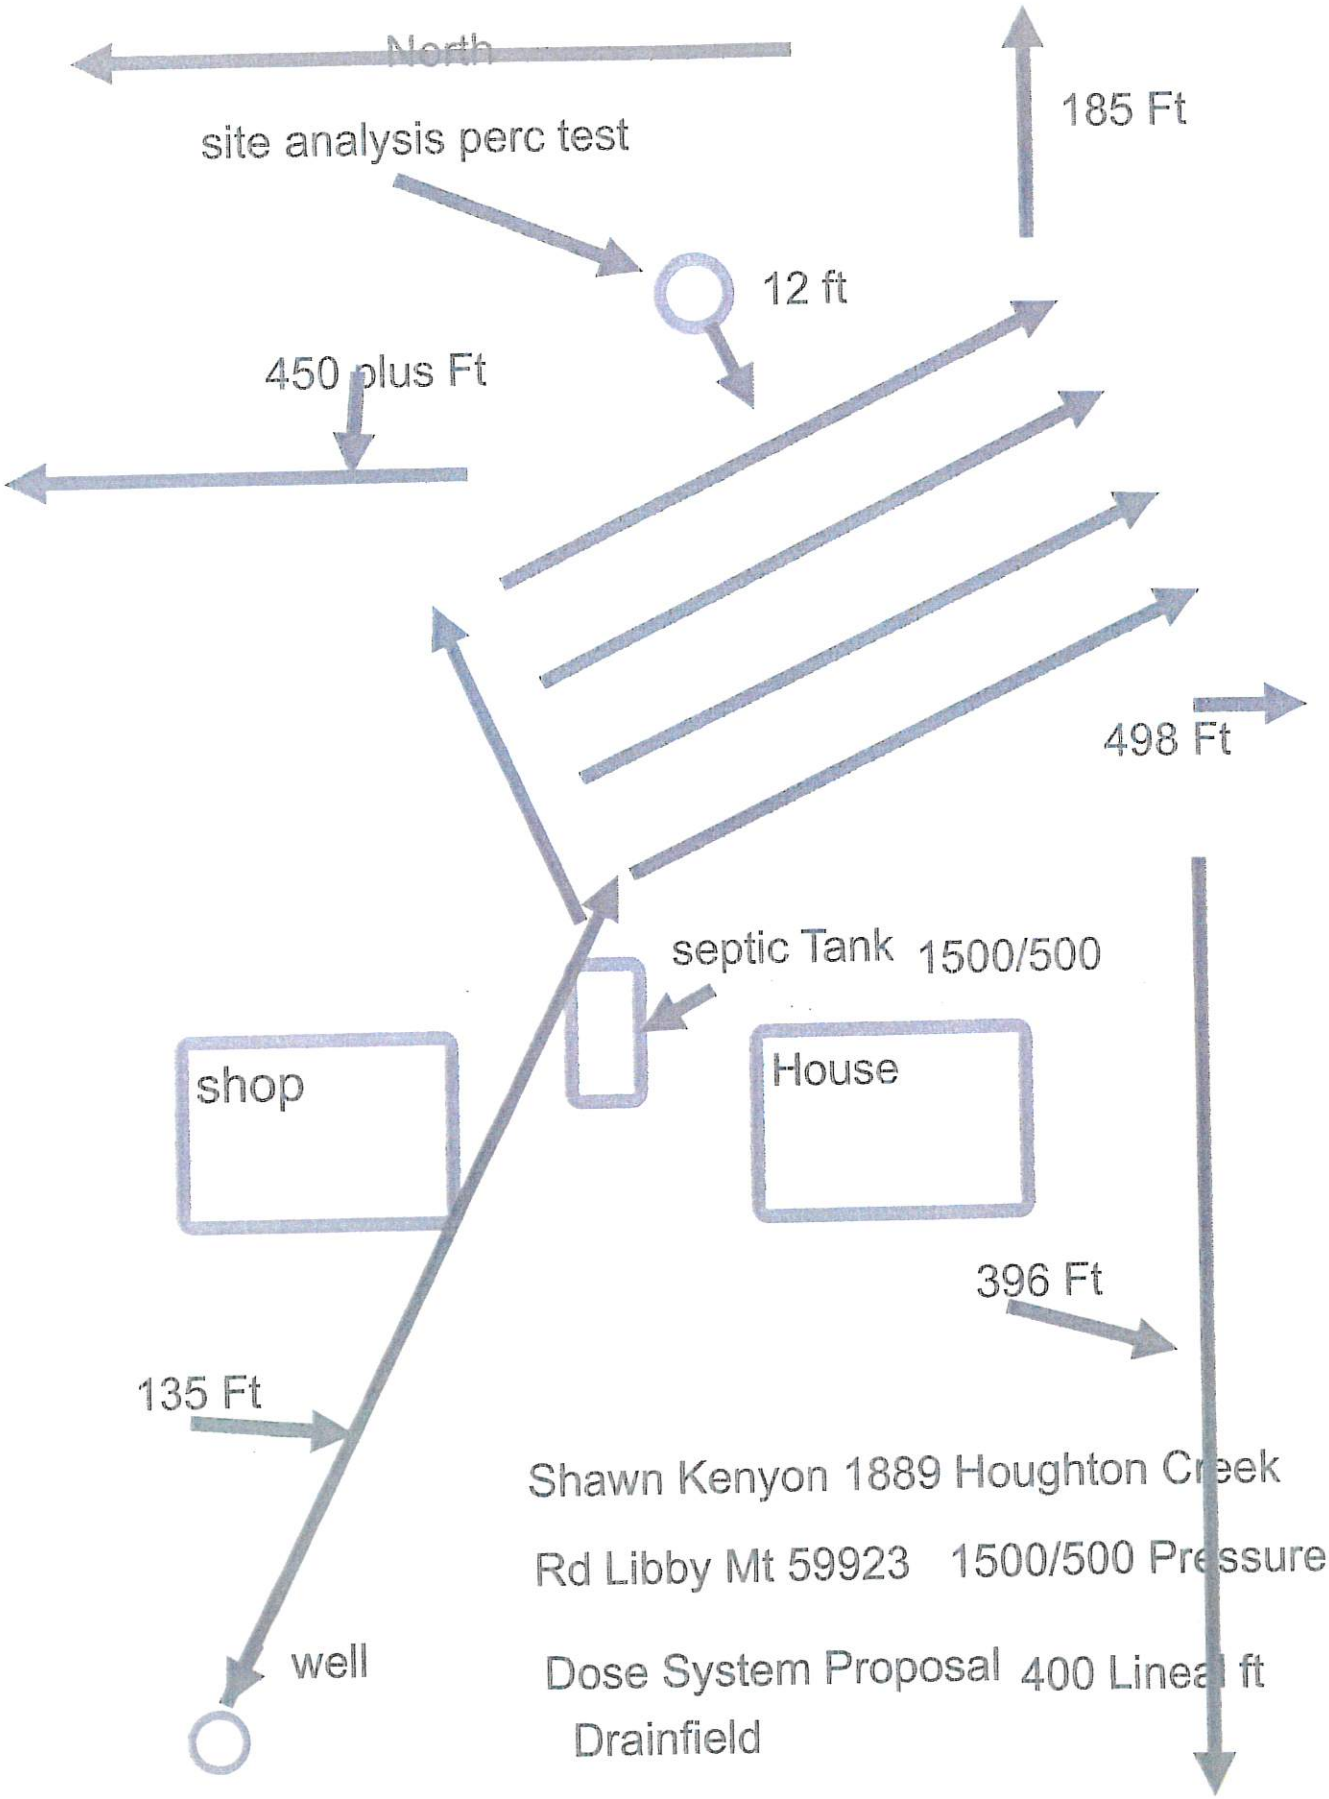
Closure Statement:

This system is in compliance with the approved design criteria and Lincoln County's Wastewater Treatment and Disposal Regulation.

Signed: _____ *Date:* _____

This permit is not finalized until the system is inspected and the closure statement is signed.

This permit is not a guarantee that the system will function properly for a prescribed period of time.


North
site analysis perc test
185 Ft
12 ft
450 plus Ft
498 Ft
septic Tank 1500/500
shop
House
396 Ft
135 Ft
well
Shawn Kenyon 1889 Houghton Creek
Rd Libby Mt 59923 1500/500 Pressure
Dose System Proposal 400 Lineal ft
Drainfield