LINCOLN COUNTY
DEPARTMENT OF ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date:10/18/2021 Expiration Date: 10/18/2022

Property Owner: Chris Kraynak

Address: [redacted]

Telephone: [redacted] (Work)

Installer: Kootenai Sand & Gravel License No.109

_XX_ New Installation ____ Existing System

____ Repair ____ Replacement ____ Extension ____ Other- Renewal (MD)

Describe: Gravity System

Parcel Description:

Legal: KSANKA FOOTHILLS, S10, T36 N, R26 W, ACRES 20, PM 6655 LOT 4 IN SW

Address or Location: LOT 4

Geo/Assessors code: 0000006857

Approved Design Criteria:

Bedrooms 4 Septic Tank Size: (2) 1000 gallons Drainfield Size: 450 Lineal Feet

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET !!

Special Instructions: INSTALL SYSTEM ACCORDING TO LAYOUT, DEQ-4 AND LINCOLN COUNTY WASTEWATER REGULATION #3. ANY DEVIATIONS FROM APPROVED PLAN MUST BE AUTHORIZED BY THE DEPARTMENT.

Issued By: Kathi Hooper, R.S.

Closure Statement:

I, _____, have inspected this system and found it to be in compliance with the conditions of the permit, and the Lincoln County Wastewater Treatment and Disposal Regulation.

Signed: _____ *Date:* _____

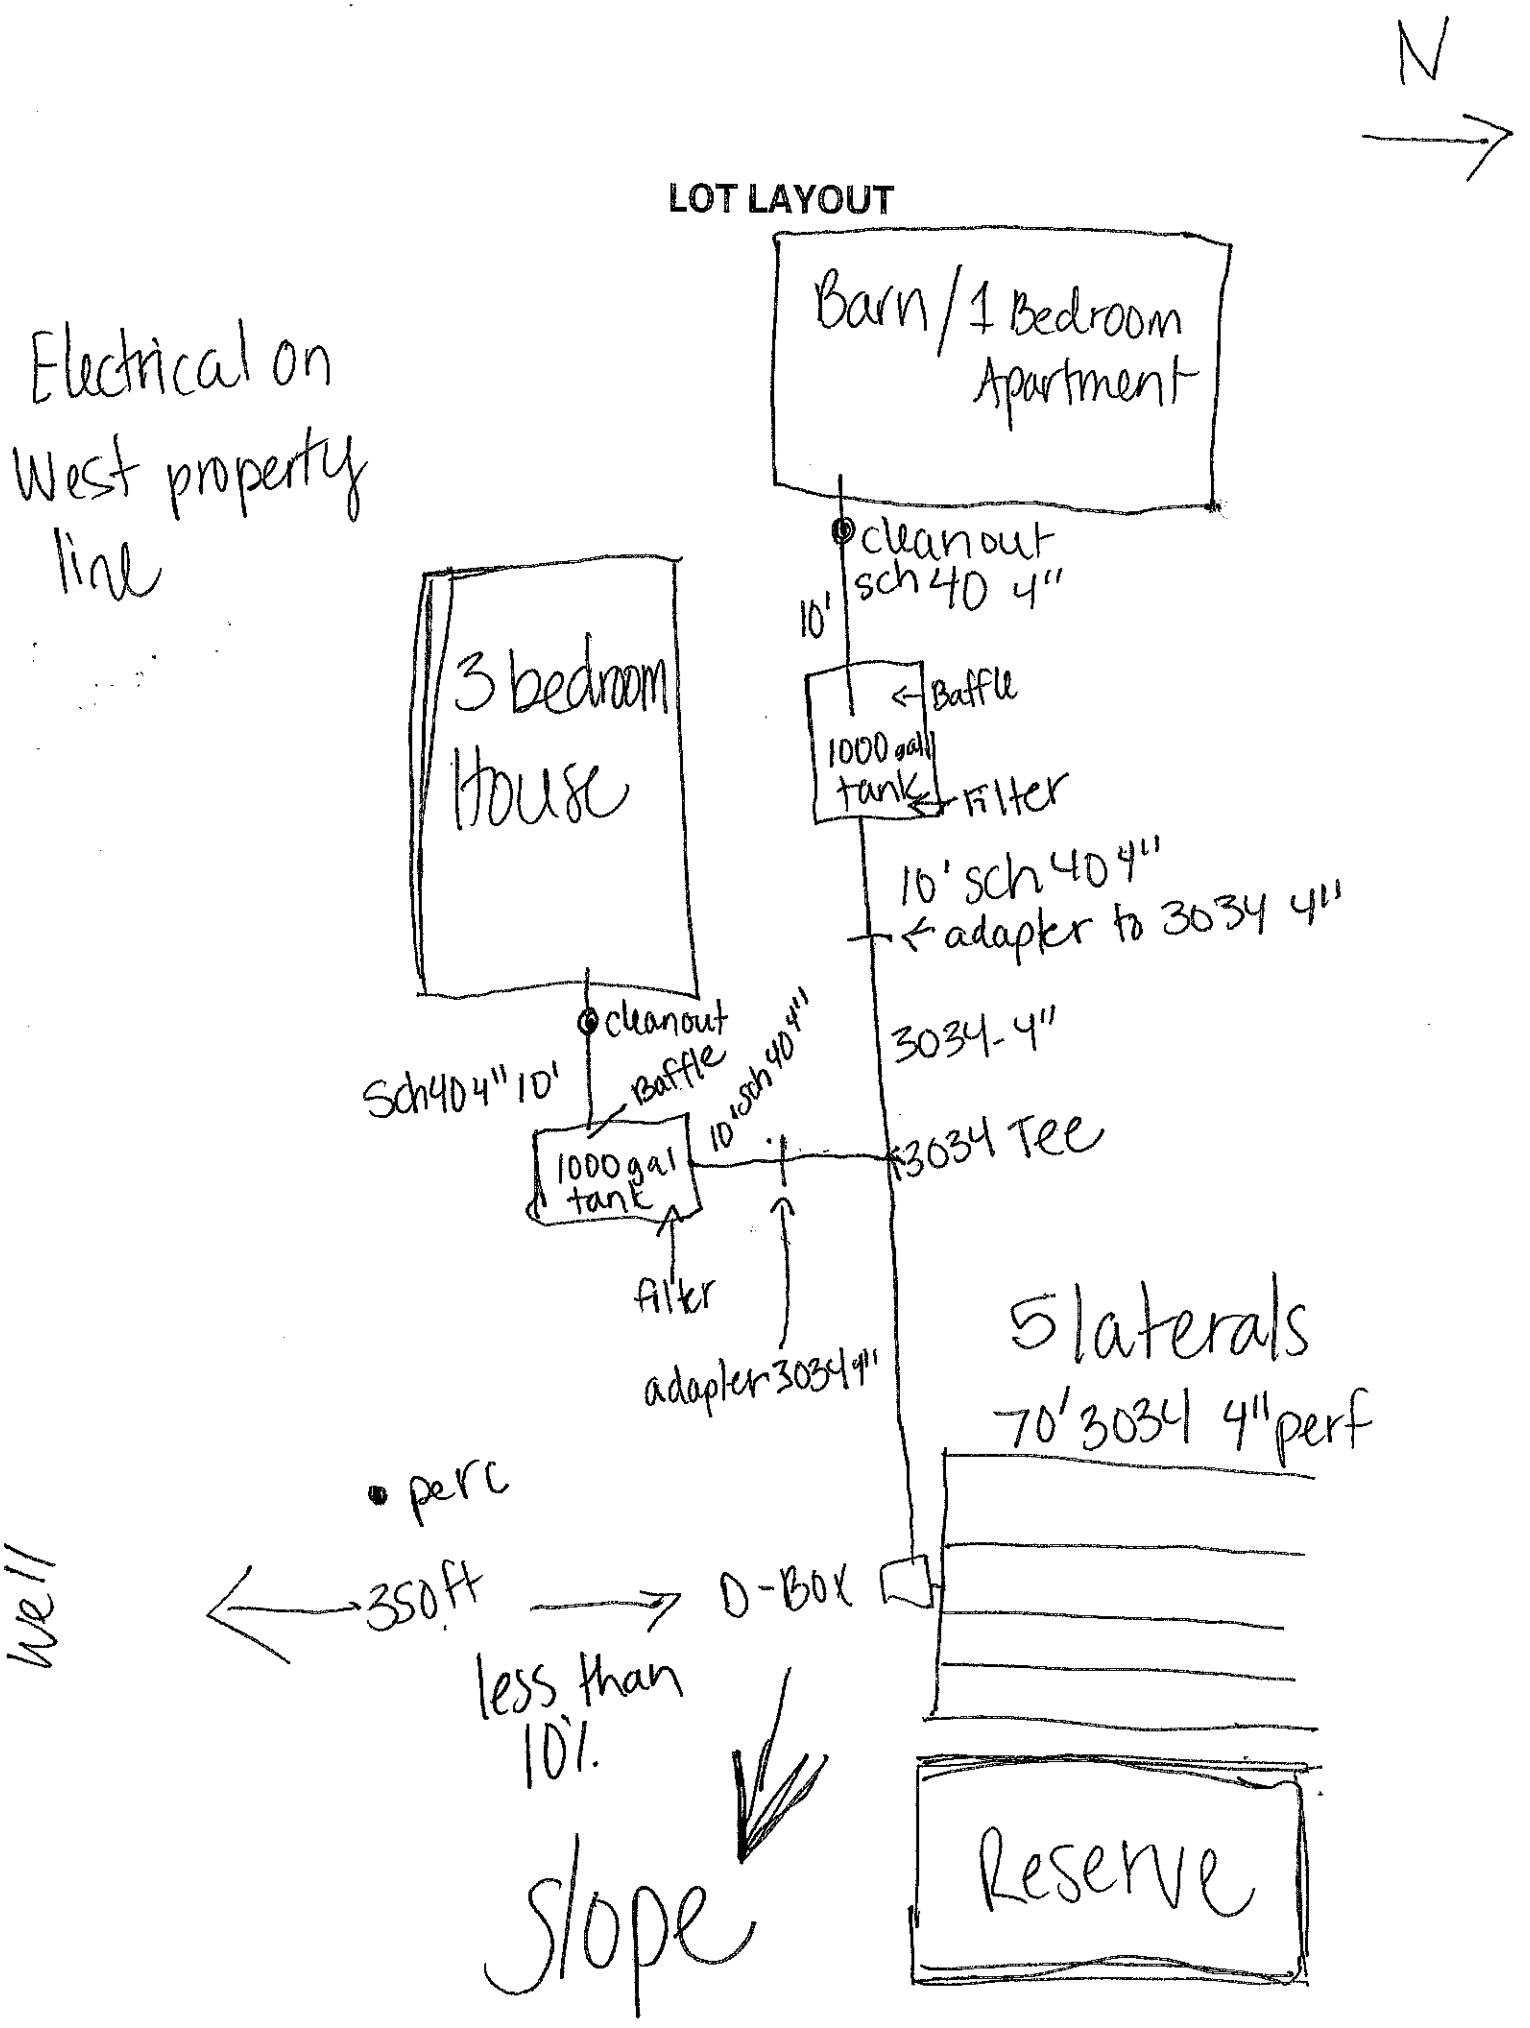
Title: _____

NOTICE: The Department must be notified at least 48 hours prior to backfilling the system. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation No. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.

406-283-2442

DISCLAIMER

This permit is not a guarantee by the Department that the system will function properly for a prescribed period of time.


N
LOT LAYOUT
Barn / 1 Bedroom Apartment
Electrical on West property line
3 bedroom house
cleanout sch 40 4"
10'
Baffle
1000 gal tank
Filter
10' sch 40 4"
adapter to 3034 4"
3034-4"
cleanout
Baffle
Sch40 4" 10'
10' sch 40 4"
1000 gal tank
3034 Tee
filter
adapter 3034 4"
5 laterals
70' 3034 4" perf
perc
well
350ft
D-Box
less than 10%.
slope
Reserve