LINCOLN COUNTY
DEPARTMENT OF ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 11/6/15 Expiration Date: 11/7/2020

Property Owner: Bull Lake Rural Fire District c/o: Clyde Miller Fire Chief

Address: [redacted]

Telephone: (Home) [redacted] (Work) [redacted]

Installer: Self License No.

__xx__ New Installation ____ Existing System

____ Repair ____ Replacement ____ Extension ____ Other

Describe: 2x100' trenches using gravelless chambers, no reduction in sizing

Parcel Description:

Legal: S29 T29 R33

Address or Location: East of HWY 56 across from Bethel Dr.

Approved Design Criteria:

Bedrooms 300gpd Septic Tank Size: 1500 gallons Drainfield Size: 200 Linear Feet

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET !!

Special Instructions: INSTALL SYSTEM ACCORDING TO LAYOUT, DEQ-4 AND LINCOLN COUNTY WASTEWATER REGULATION #3. ANY DEVIATIONS FROM APPROVED PLAN MUST BE AUTHORIZED BY THE DEPARTMENT.

Issued By: Jake Mertes

Closure Statement:

I, J. MERTES, RS *, have inspected this system and found it to be in compliance with the conditions of the permit, and the Lincoln County Wastewater Treatment and Disposal Regulation.*

Signed: _____ *Date:* 2/13/2020

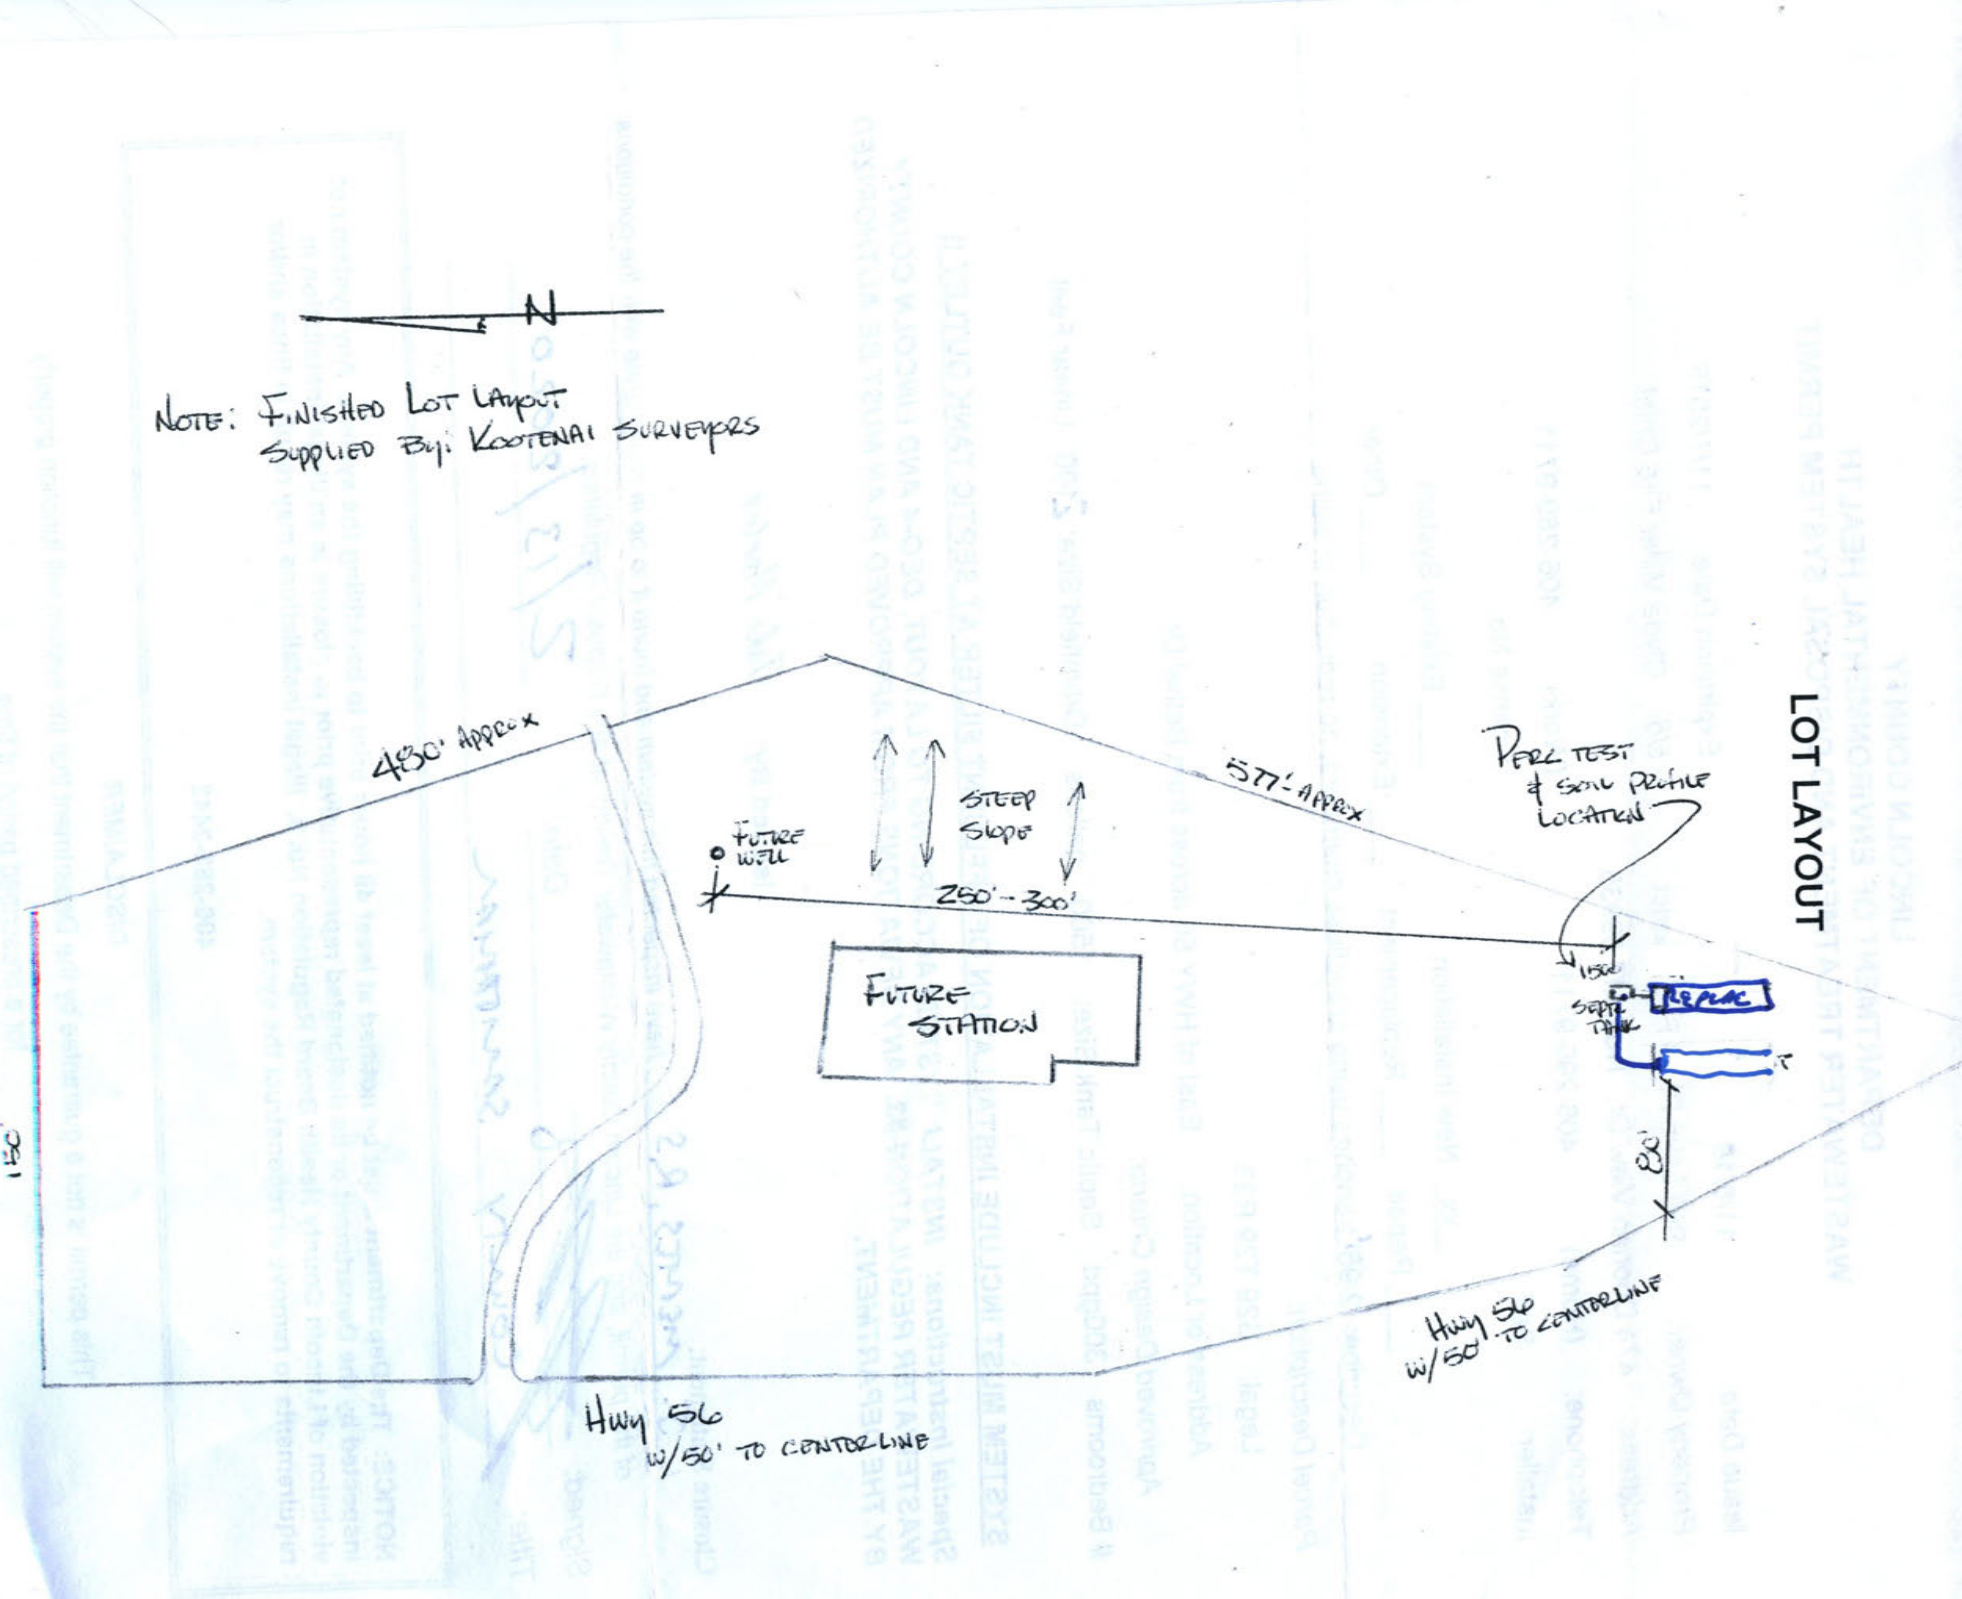
Title: COUNTY SANITARIAN

NOTICE: The Department must be notified at least 48 hours prior to backfilling the system. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation No. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.

406-283-2442

DISCLAIMER

This permit is not a guarantee by the Department that the system will function properly for a prescribed period of time.


N
NOTE: FINISHED LOT LAYOUT
SUPPLIED BY: KOOTENAI SURVEYORS
LOT LAYOUT
480' APPROX
577' APPROX
PERC TEST
& SOIL PROFILE
LOCATION
FUTURE
WELL
STEEP
SLOPE
250' - 300'
FUTURE
STATION
150'
SEPTIC
TANK
REPAIR
30'
HWY 56
W/50' TO CENTERLINE
HWY 56
W/50' TO CENTERLINE