LINCOLN COUNTY
DEPARTMENT OF ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 10/06/2020 Expiration Date: 10/06/2021

Property Owner: John Manion c/o:

Address: [redacted]

Telephone: [redacted] (Home) (Work)

Installer: John Manion License No.

XX New Installation ____ Existing System

__Repair ____ Replacement ____ Extension ____ Other

Describe: Three 84' laterals using chambers.

Parcel Description:

Legal: PARKSIDE @ FISHER RIVER, S14, T27 N, R28 W, ACRES 7.875, LOT 38 PM 6892

Address or Location: NHN Loon Connector Rd Lot 38

Geo/Assessors code: 0000056114

Approved Design Criteria:

Bedrooms 3 Septic Tank Size: 1000 gallons Drainfield Size: 250 Lineal Feet

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET !!

Special Instructions: INSTALL SYSTEM ACCORDING TO LAYOUT, DEQ-4 AND LINCOLN COUNTY WASTEWATER REGULATION #3. ANY DEVIATIONS FROM APPROVED PLAN MUST BE AUTHORIZED BY THE DEPARTMENT.

Issued By: Jake Mertes, R.S.

Closure Statement:

I, J. MERTES *, have inspected this system and found it to be in compliance with the conditions of the permit, and the Lincoln County Wastewater Treatment and Disposal Regulation.*

Signed: _____ *Date:* 12/24/2020

Title: CO. SANITARIAN

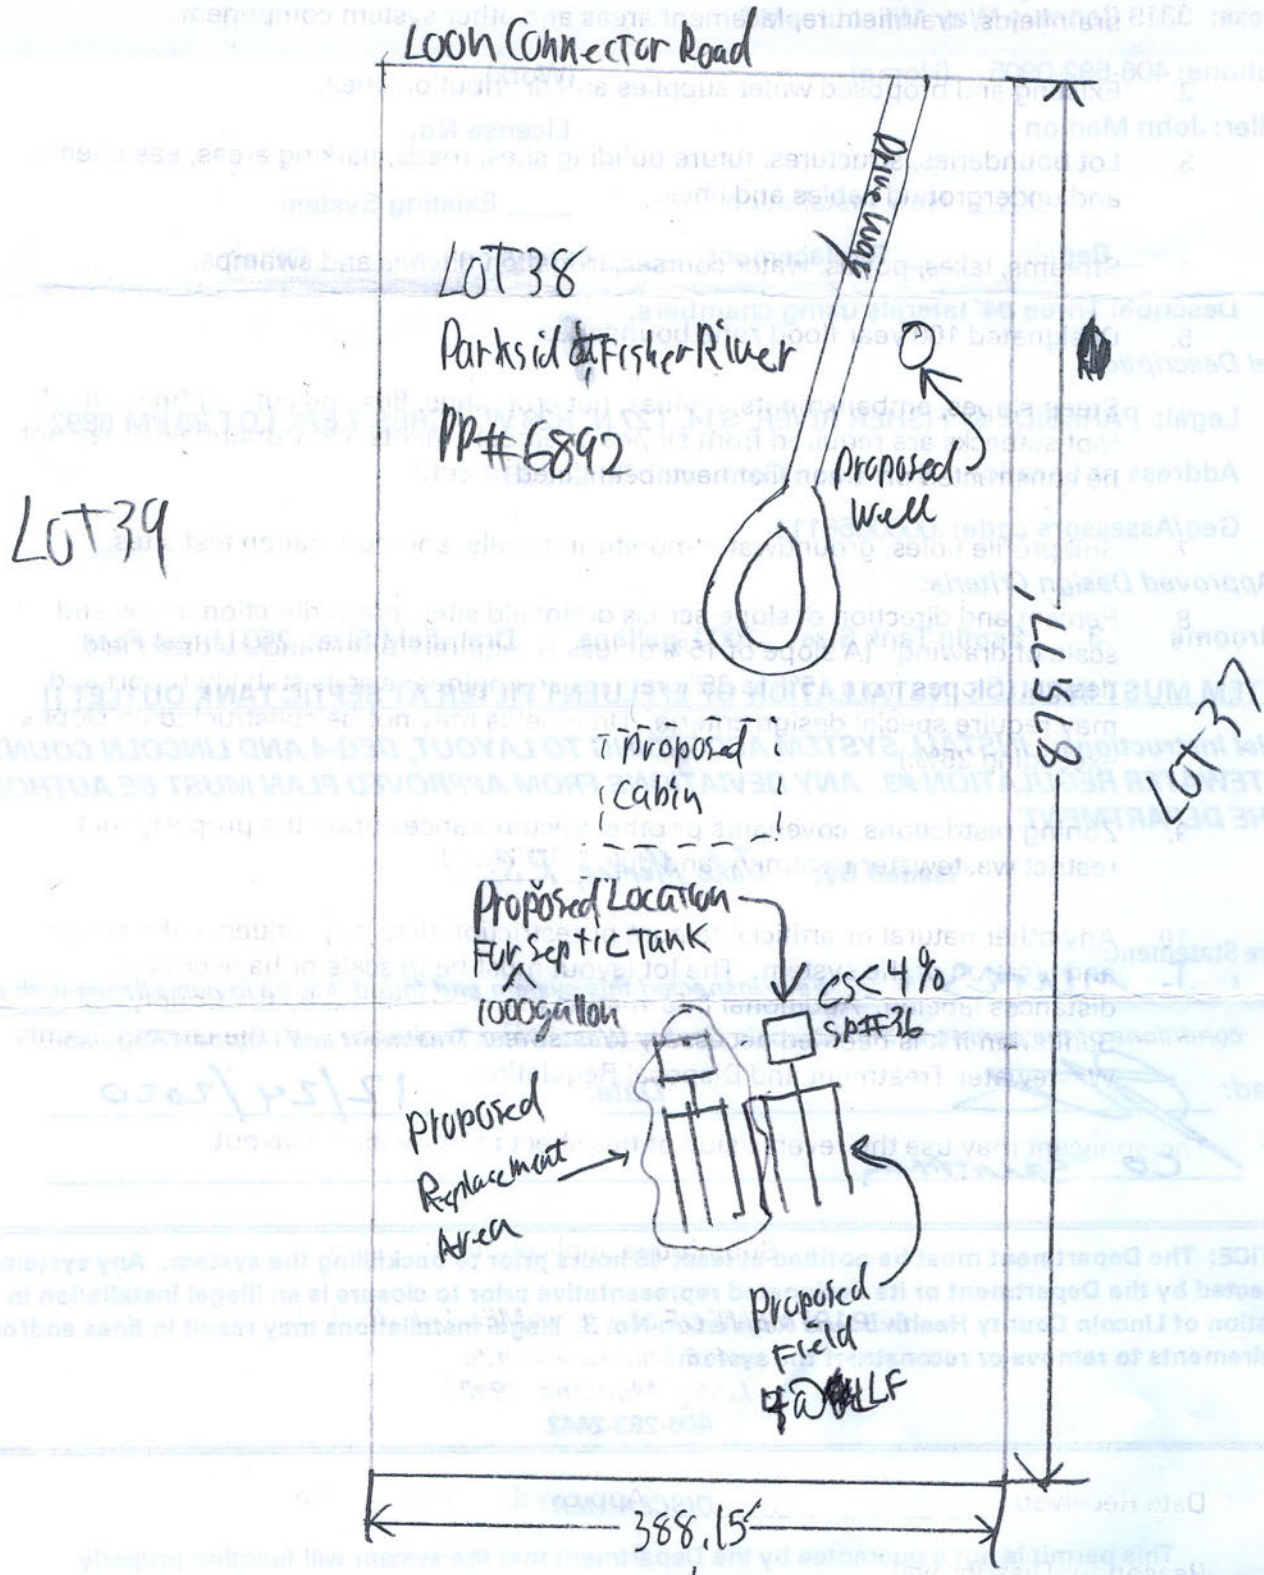
NOTICE: The Department must be notified at least 48 hours prior to backfilling the system. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation No. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.

406-283-2442

DISCLAIMER

This permit is not a guarantee by the Department that the system will function properly for a prescribed period of time.

LOT LAYOUT


Loon Connector Road
Drive Way
LOT 38
Parkside at Fisher River
PP# 6892
Proposed well
LOT 39
875.77'
LOT 37
Proposed cabin
Proposed Location For Septic Tank
1000gallon
CS<4%
SP#36
Proposed Replacement Area
Proposed Field
388.15'
LOT 26
LOT 27