LINCOLN COUNTY
DEPARTMENT OF ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 12/02/2020 Expiration Date: 12/02/2021

Property Owner: Brian McCully c/o:

Address: [redacted]

Telephone: [redacted] (Home) (Work)

Installer: Bruce Todd License No. 54

__XX__ New Installation ____ Existing System

____ Repair ____ Replacement ____ Extension ____ Other

Describe: Three 84' Laterals using chambers.

Parcel Description:

Legal: DEER PARK EAST, S02, T36 N, R27 W, ACRES 4.88, PM #6583 PM 6583 LOT 2

Address or Location: LOT 2

Geo/Assessors code: 0000054558

Approved Design Criteria:

Bedrooms 3 Septic Tank Size: 1000 gallons Drainfield Size: 252 Lineal Feet

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET !!

Special Instructions: INSTALL SYSTEM ACCORDING TO LAYOUT, DEQ-4 AND LINCOLN COUNTY WASTEWATER REGULATION #3. ANY DEVIATIONS FROM APPROVED PLAN MUST BE AUTHORIZED BY THE DEPARTMENT.

Issued By: Jake Mertes, R.S.

Closure Statement:

I, Bruce Todd *, have inspected this system and found it to be in compliance with the conditions of the permit, and the Lincoln County Wastewater Treatment and Disposal Regulation.*

Signed: Bruce C. Todd *Date:* 12-10-2021

Title: INSTALLER

NOTICE: The Department must be notified at least 48 hours prior to backfilling the system. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation No. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.


406-283-2442

DISCLAIMER

This permit is not a guarantee by the Department that the system will function properly for a prescribed period of time.

Legend
- ○ perctest
- □ test hole
- drainfield site
- replacement area
- wellsite w/100' isolation
- mixing zone

Name: Deer Park Subdivision
County: Lincoln
Location: NE1/4 sec.2-T36N-R27W
E.Q.#

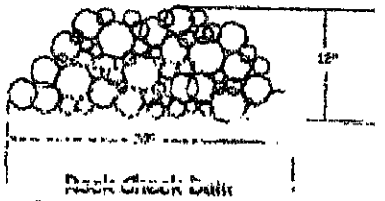


LOT 1
4.94 acres gr.
4.63 acres net.

LOT 2
5.87 acres gr.
5.79 acres net.

Irrigation Ditch
(above proposed drainfield locations)

2-3%
House Site
possible driveway
40' Pvt. Rd. & Utility Easement
2-3%
6-10%
House Site
House Site
possible driveway
1-2%
Natural Swale



Roadside Swale Detail
to be installed along both sides of roadway
culverts to be installed as needed
ditch sides @ 1 to 1 slope

LOT 3
5.80 acres gr.
5.41 acres net.

LOT 4
3.59 acres gr.
3.58 acres net.

House Site

Ex. 40' Pvt. Rd. & Utility Easement

RECEIVED
DEC 21 2004
Department of Environmental Quality
Kalispell Regional Office

APPROVED
Montana Department of Environmental Quality
Permitting and Compliance Division
Reviewer 12/21/04 Date

N

1"=200'

Enviro-Tech Consulting Inc.
PO Box 5674
Kalispell, MT 59903
(406)261-7565