# LINCOLN COUNTY
# DEPARTMENT OF ENVIRONMENTAL HEALTH
# WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 12/14/2020 Expiration Date: 12/14/2021

Property Owner: Orva Yoder c/o: Enviro-Tech Consulting

Address: [redacted]

Telephone: [redacted] (Home) (Work)

Installer: Ivan Miller [Jr.] License No. 52

__XX__ New Installation ____ Existing System

____ Repair ____ Replacement ____ Extension ____ Other

Describe: Four 94' laterals using drain rock.

*Parcel Description*:

Legal: S09, T37 N, R28 W, CS #2831, E2SW4NE4 OR PARCEL A CS#2831

Address or Location: Long Horn Trail Parcel A

Geo/Assessors code: 0000053848

*Approved Design Criteria*:

# Bedrooms 3 Septic Tank Size: 1000 gallons Drainfield Size: 375 Lineal Feet

**SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET !!**

***Special Instructions: INSTALL SYSTEM ACCORDING TO LAYOUT, DEQ-4 AND LINCOLN COUNTY WASTEWATER REGULATION #3. ANY DEVIATIONS FROM APPROVED PLAN MUST BE AUTHORIZED BY THE DEPARTMENT.***

**Issued By:** Jake Mertes, R.S.

Closure Statement: I, Ivan Miller, *have inspected this system and found it to be in compliance with the conditions of the permit, and the Lincoln County Wastewater Treatment and Disposal Regulation.*

*Signed:* Ivan Miller *Date:* 5/24/2021

*Title:* installer

**NOTICE: The Department must be notified at least 48 hours prior to backfilling the system. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation No. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.**

**406-283-2442**


***DISCLAIMER***

This permit is not a guarantee by the Department that the system will function properly for a prescribed period of time.

Name: Parcel A- COS#2831
County: Lincoln
Location: sec.9-T37N-R28W
E.Q.#

Legend

- ⊠ test hole
- ≡ proposed drainfield site
- ▭ proposed replacement area
- ⚠ proposed well site w/ 100' isolation zone
- ▱ provisional mixing zone

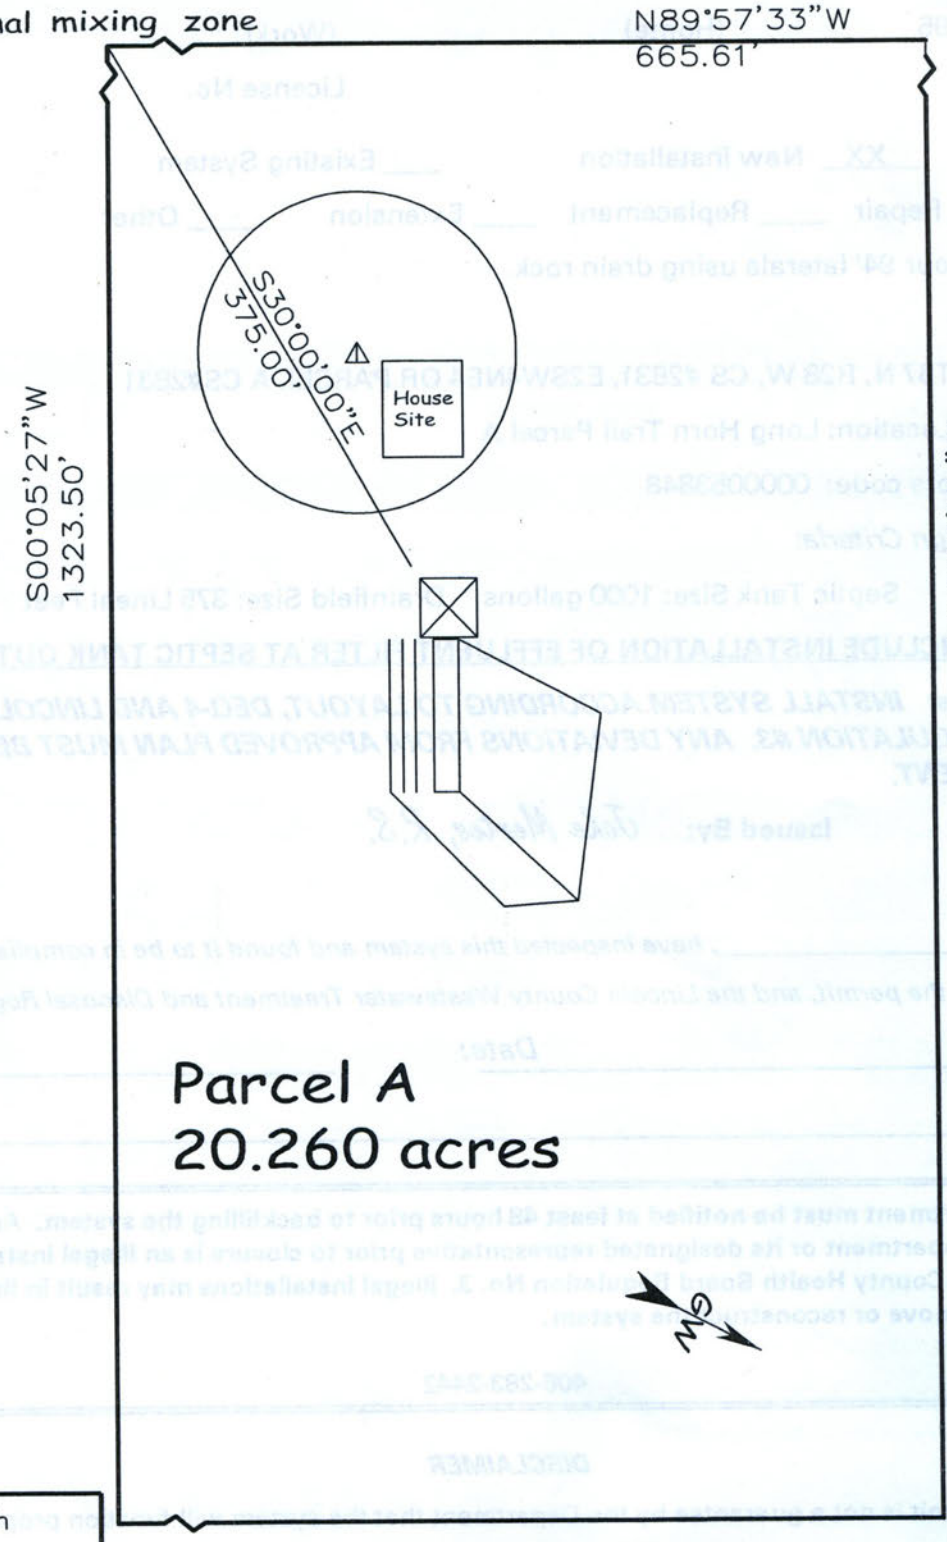


No Scale

Enviro-Tech
Consulting Inc.
Brian S. Launius
PO Box 5674
Kalispell, MT 59903