LINCOLN COUNTY
DEPARTMENT OF ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 10/22/2019 Expiration Date: 10/22/2020

Property Owner: Paul Burnett c/o:

Address: [redacted]

Telephone: [redacted] (Home) (Work)

Installer: License No.

__xx__ New Installation ____ Existing System

____ Repair _____ Replacement ____ Extension ____ Other

Describe: Four rows of 50' laterals using graveless chambers

Parcel Description:

Legal: S34, T31 N, R31 W, C.O.S. 2946, PARCEL A, ACRES 3.025, ASSR#0000009255

Address or Location: Parcel A

Geo/Assessors code: 0000009255

Approved Design Criteria:

Bedrooms 3 Septic Tank Size: 1000 gallons Drainfield Size: 200 Lineal Feet

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET !!

Special Instructions: INSTALL SYSTEM ACCORDING TO LAYOUT, DEQ-4 AND LINCOLN COUNTY WASTEWATER REGULATION #3. ANY DEVIATIONS FROM APPROVED PLAN MUST BE AUTHORIZED BY THE DEPARTMENT.

Issued By: Jake Mertes, R.S.

Closure Statement:

I, _____, have inspected this system and found it to be in compliance with the conditions of the permit, and the Lincoln County Wastewater Treatment and Disposal Regulation.

Signed: _____ *Date:* _____

Title: _____


NOTICE: The Department must be notified at least 48 hours prior to backfilling the system. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation No. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.

406-283-2442


DISCLAIMER

This permit is not a guarantee by the Department that the system will function properly

Roadside Swale Detail
4 cu. ft. NO scale



4 cu. ft. / 1 lineal ft. = 29.92 gallons retention
Proposed swale= 390 lineal feet=1560 cu. ft. capacity
Retention required = > 1688.59 cu. ft.

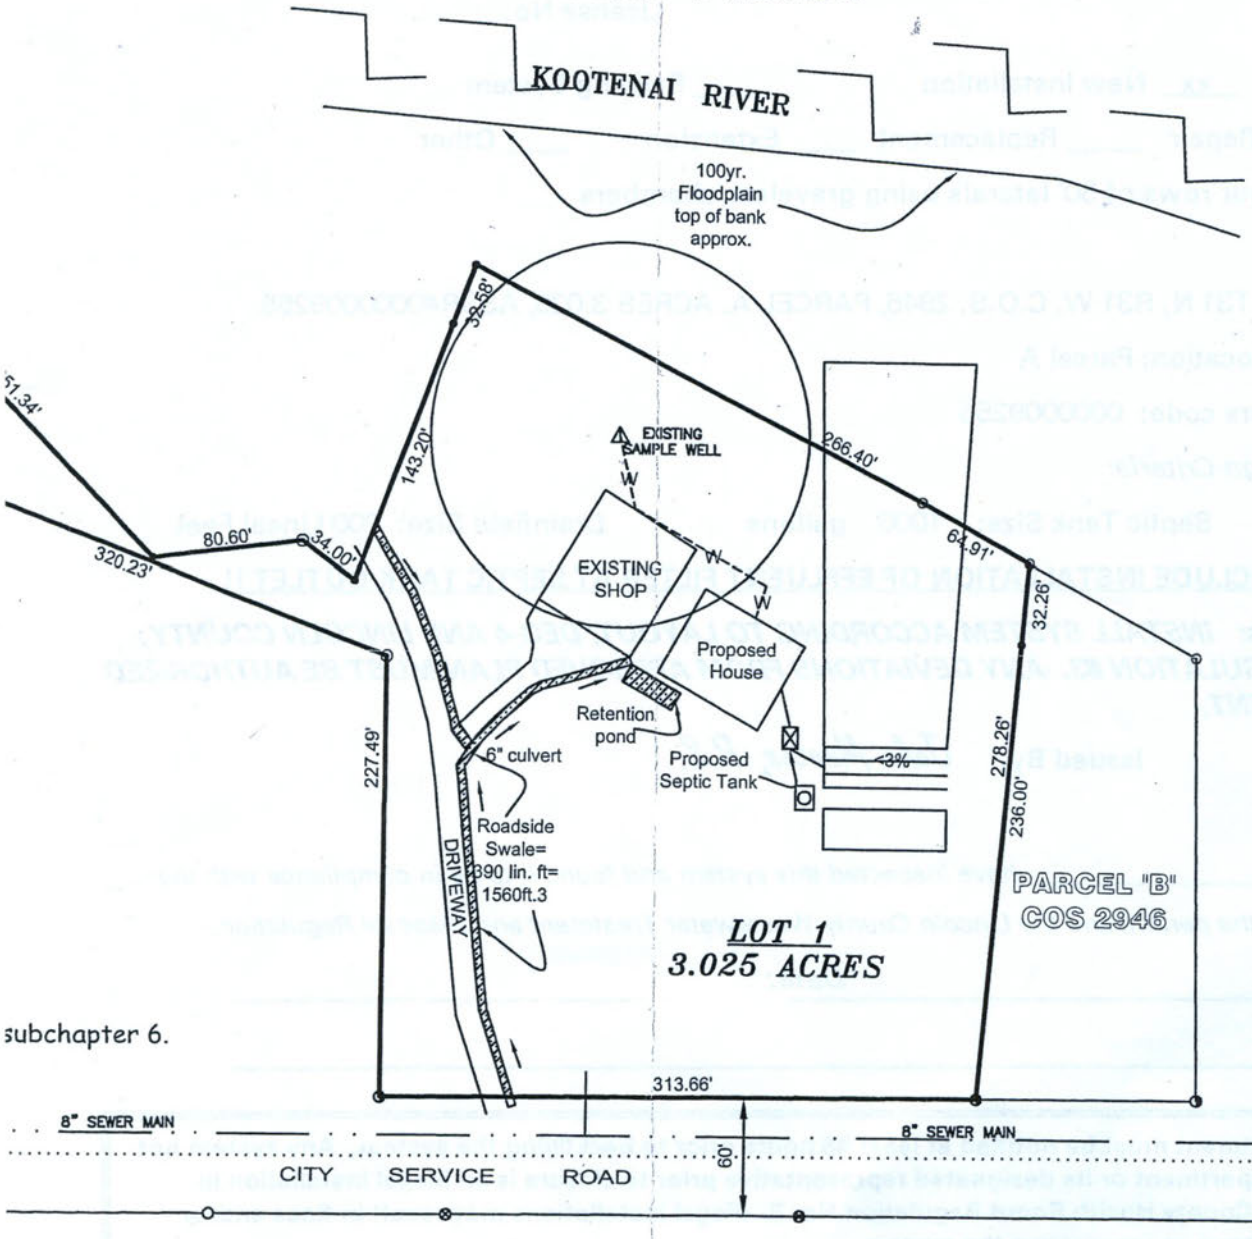

subchapter 6.

BURN
"REMOVE
PA
GOV. LO
LINC

Drainfield
for each p
3 bdrm. h

LOT 1 = 0.
250 Lin. f
4 laterals
1,000 gal.

Swales to convey
to Rentic