LINCOLN COUNTY
DEPARTMENT OF ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 06/05/03 Expiration Date: 06/04/03

Property Owner: John McCrorie c/o: Timberline Ready Mix

Address: [redacted]

Telephone: (Home) (Work) [redacted]

Installer: Timberline Ready Mix License No. 78

__XX__ New Installation _____ Existing System

_____ Repair _____ Replacement _____ Extension _____ Other

Describe: Septic for R-V pad site

Parcel Description:

Legal: N-1/2 NW-1/4 S34 & S-12 SE-1/4 SW-1/4 S27 T35 R27

Address or Location: Pinkham Creek Road

Approved Design Criteria:

Bedrooms 2 Septic Tank Size: 1000 gallons Drainfield Size: 285 Linear Feet

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET !!

Special Instructions: INSTALL SYSTEM ACCORDING TO LAYOUT AND LINCOLN COUNTY WASTEWATER REGULATION #3. ANY DEVIATIONS FROM APPROVED PLAN MUST BE AUTHORIZED BY THE DEPARTMENT.

Issued By: Kendra J. Lind, R.S.

Closure Statement:

I, Barbara Renkema *, have inspected this system and found it to be in compliance with the conditions of the permit, and the Lincoln County Wastewater Treatment and Disposal Regulation.*

Signed: Barbara Renkema *Date:* Aug 19 '03

Title: Inspector

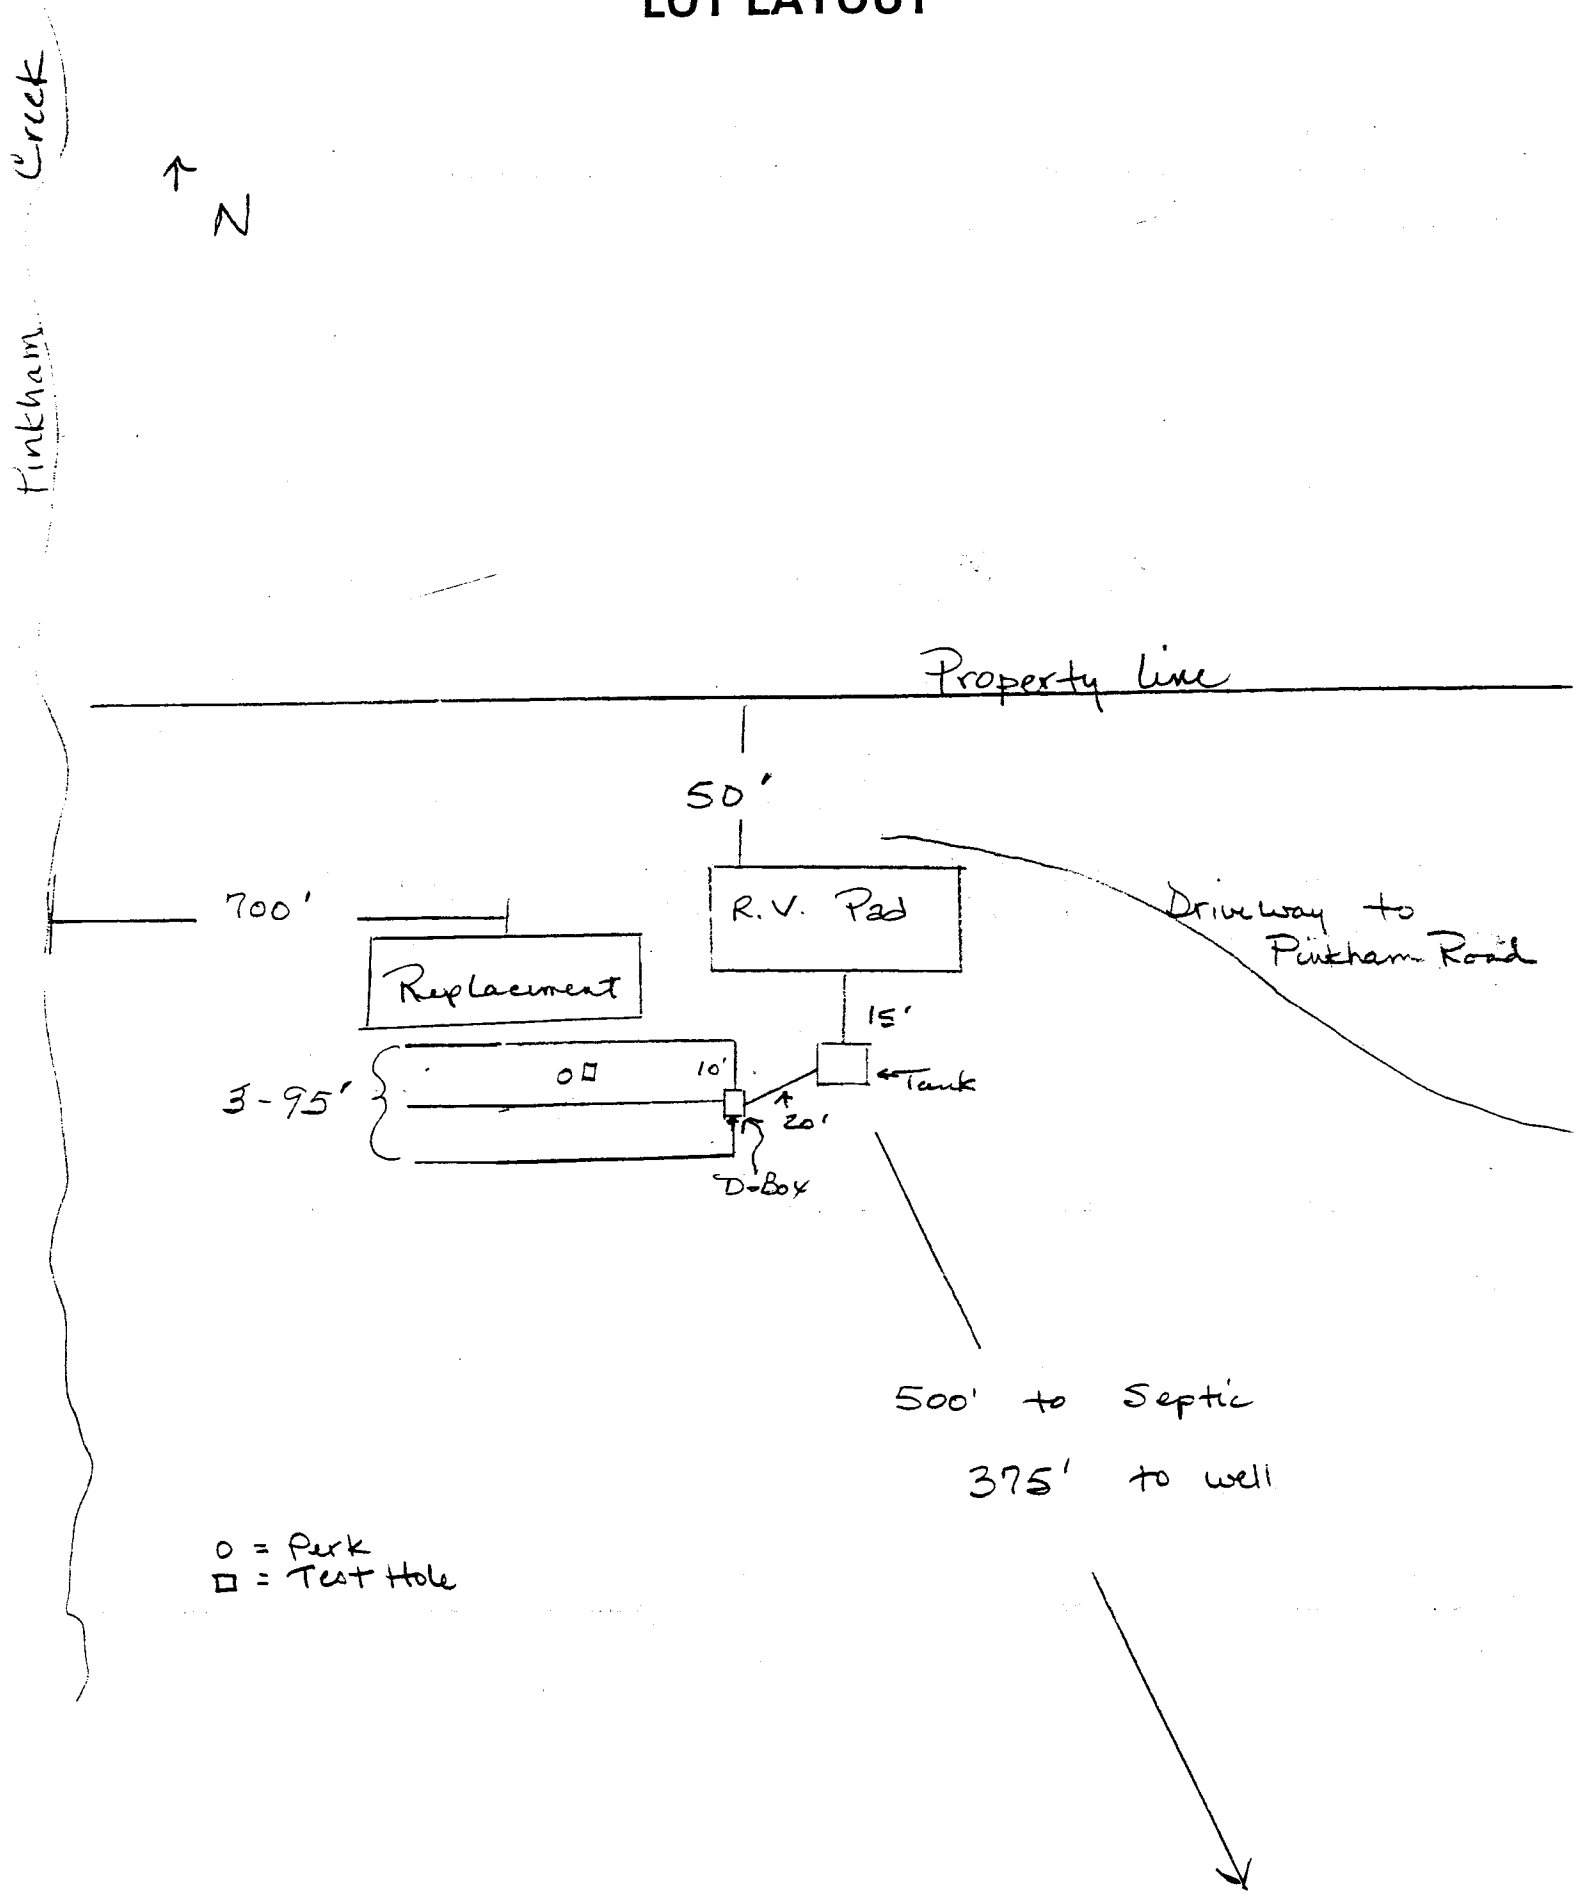
NOTICE: The Department must be notified at least 48 hours prior to backfilling the system. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation No. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.

406-293-7781

DISCLAIMER

This permit is not a guarantee by the Department that the system will function properly for a prescribed period of time.

LOT LAYOUT


Creek
N
Pinkham
Property line
50'
700'
R.V. Pad
Driveway to Pinkham Road
Replacement
15'
3-95'
10'
Tank
20'
D-Box
500' to Septic
375' to well
O = Perk
□ = Test Hole