file

HCHD

LINCOLN COUNTY SEPTIC SYSTEM PERMIT

ISSUED TO: Niles and Janet Severy PHONE: [redacted]

ADDRESS: [redacted] CONTRACTOR: Dawson & Nelson Bennett, Eddy, Ltd.

ISSUED BY (sign.): Ronald K. Anderson R.S. DATE: 6-28-91

INSPECTION BY (sign.): Ron Anderson DATE: 9-5-91

*PLEASE NOTE: The Lincoln County "On-site Sewage Disposal Regulation" does not conform with all requirements of the Montana State "Sanitation in Subdivision Act" Therefore, septic systems permitted under the county regulation may not be approvable for the purpose of future land division health reviews.

You must notify the Department of Environmental Health a minimum of 8 working hours before backfilling the septic system, so that it can be inspected.

LOCATION OF PROPOSED SYSTEM: HES #738 & HES#1241 Sections 5 & 8 T32N R33W


SEPTIC TANK: 1000 (Minimum) gal. ABSORPTION AREA: 600 ft²

SEWAGE DISCHARGE: 400 gal/day No. OF BEDROOMS: 3

WATER SUPPLY SOURCE: Well and/or Springs SOIL: Coarse sand, fine gravels and silty sand SLOPE: 8%

INSTRUCTIONS: Dig a ditch at least 300' in length x 2½-3' deep x 2' wide according to lot layout and ditch diagram. Grade of pipe should not exceed 1% drop.

SKETCH OF LOT LAYOUT:
- No Scale -

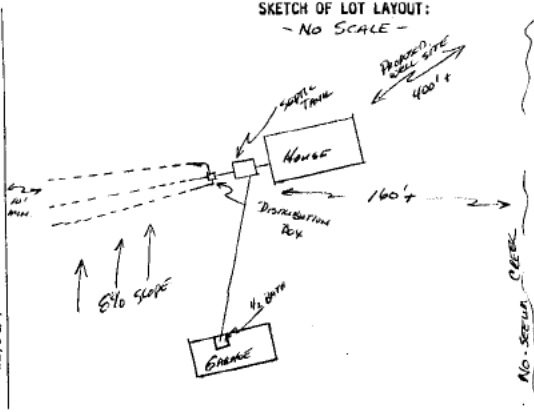



Ditch Diagram