LINCOLN COUNTY
DEPARTMENT OF ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 3/6/2018 Expiration Date: 3/6/2019

Property Owner: Frank Dierman c/o: JD Voyles

Address: [redacted]

Telephone: (Home) (Work)

Installer: JD Voyles License No. 22

__xx__ New Installation ____ Existing System

____ Repair ____ Replacement ____ Extension ____ Other

Describe: Four 95' laterals using drain rock and perf. pipe.

Parcel Description:

Legal: S22 T36 R27

Address or Location: Rocky View Estates Remainder

Geo/Assessors code: 0000016885

Approved Design Criteria:

Bedrooms 3 Septic Tank Size: 1000 gallons Drainfield Size: 375 Linear Feet

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET !!

Special Instructions: INSTALL SYSTEM ACCORDING TO LAYOUT, DEQ-4 AND LINCOLN COUNTY WASTEWATER REGULATION #3. ANY DEVIATIONS FROM APPROVED PLAN MUST BE AUTHORIZED BY THE DEPARTMENT.

Issued By: Jake Mertes, R.S.

Closure Statement:

I, __Jake Mertes, RS__, have inspected this system and found it to be in compliance with the conditions of the permit, and the Lincoln County Wastewater Treatment and Disposal Regulation.

Signed: _____ *Date:* _____

Title: _____

NOTICE: The Department must be notified at least 48 hours prior to backfilling the system. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation No. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.

406-283-2442

DISCLAIMER

This permit is not a guarantee by the Department that the system will function properly for a prescribed period of time.

Legend


- perctest
- testhole
- drainfield site
- replacement area
- wellsite w/100' isolation
- mixing zone

Name: Pluid-Removal Of Sanitary Restrictions-
Remainder of EQ#97-2460
County: Lincoln
Location: NE $\frac{1}{4}$ sec.22-T36N-R27W
E.Q.#

RECEIVED


JUL 30 2004

Department of
Environmental Quality
Kalispell Regional Office

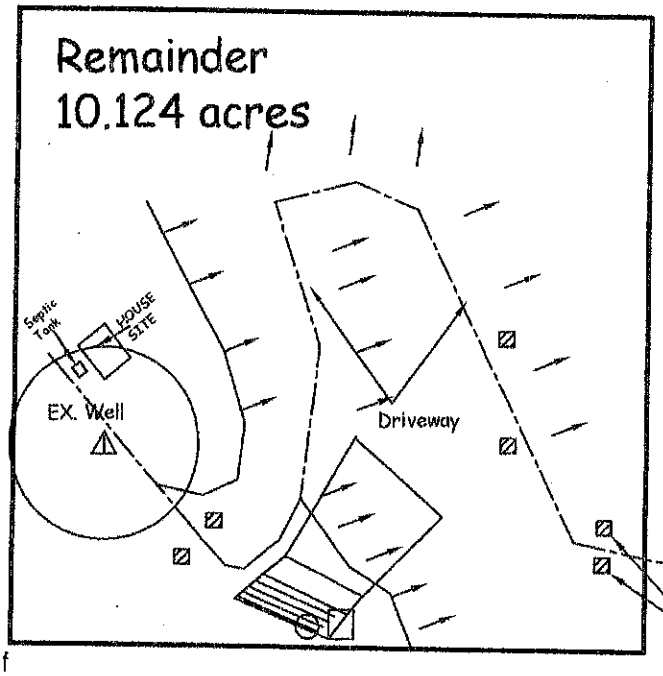

APPROVED
Montana Department of
Environmental Quality
Permitting and Compliance Division
Reviewer 7/30/09 Date

Primary & replacement Areas nearly level
surge box to be installed prior to distribution box

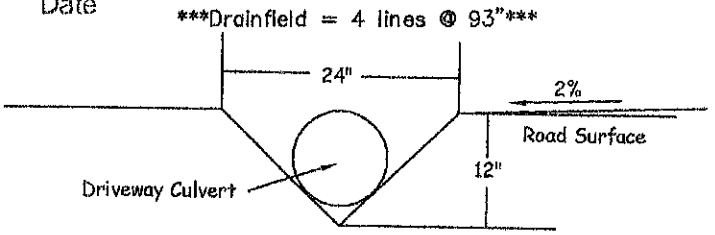

Roadside Swale Detail

to be installed along both sides of driveway
culverts to be installed as needed
ditch sides @ 1 to 1 slope
sediment reduction methods are to be along both sides of driveway

N

1"=200'

Enviro-Tech Consulting

PO Box 5674
Kalispell, MT 59903
(406)261-7565