LINCOLN COUNTY HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 09/08/2025 Expiration Date: 09/07/2026 Permit#25-8042

Property Owner: Amber Bursell

Mailing Address: [redacted]

Installer: Marty Goucher License #: 196

Approved Work: (Check One) ☐ New Installation ☒ Existing System

☒ Replace Drainfield ☐ Replace Tank ☐ Extension

Describe: Installation of seepage pit system to replace failing system for 3 Bedroom House.

Legal: VANDERWOOD 40 COZY ACRES, S32, T31 N, R31 W, ACRES 0.23, TRACT 3C IN SESE

Property Address: 148 Rustic Ave. Libby, MT 59923 Assessment Code: 8042

DEQ COSA: E.Q.# Date:

Approved Design Criteria: Installation of seepage pit system to replace failing system for 3 Bedroom House with 4 dry wells.

# of Bedrooms: 3 Septic Tank Size: 1000 Trench Width:

# of Laterals: 4 Dry Wells Length of Laterals: Trench Depth:

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET!!

Special Instructions: Install system according to the lot layout, the Lincoln County Wastewater Treatment and Disposal Regulation, Circular DEQ-4, and COSA(If Applies). It is the installer's responsibility to ensure that all required horizontal setbacks are met. CHANGES MUST BE PRE-AUTHORIZED BY THE DEPARTMENT.

Issued By: *Robin Blumberg, RS*

NOTICE: The Department must be notified at least 3 business days (72 hours) prior to backfilling the system. Call 406-283-2442. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation Ch. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.

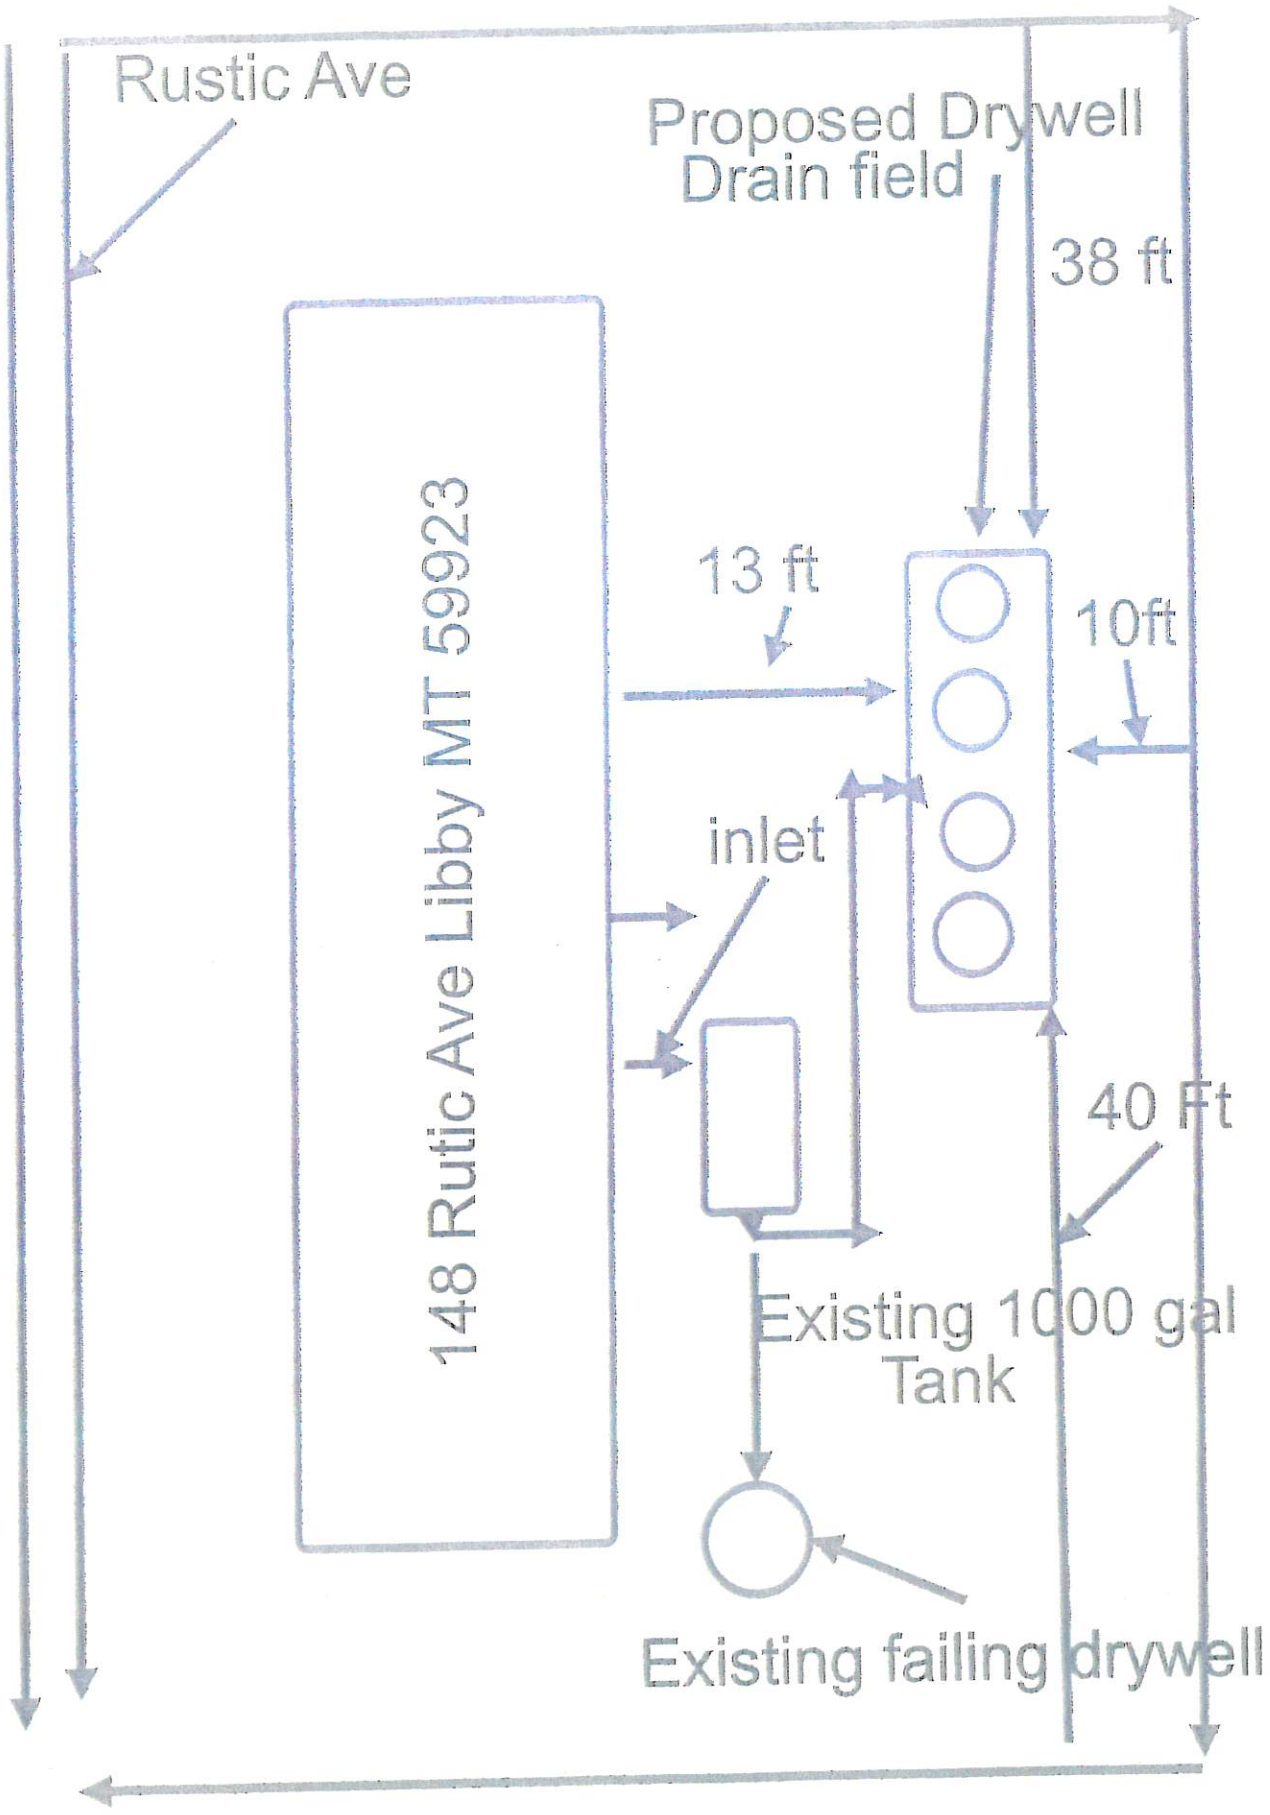
Closure Statement:

This system is in compliance with the approved design criteria and Lincoln County's Wastewater Treatment and Disposal Regulation.

Signed: Robin Blumberg *Date:* 10/22/25

This permit is not finalized until the system is inspected and the closure statement is signed.

This permit is not a guarantee that the system will function properly for a prescribed period of time.


Rustic Ave
Proposed Drywell
Drain field
38 ft
148 Rutic Ave Libby MT 59923
13 ft
10ft
inlet
40 Ft
Existing 1000 gal
Tank
Existing failing drywell