LINCOLN COUNTY
DEPARTMENT OF ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 4/21/2017 Expiration Date: 4/21/2018

Property Owner: Steve Hansen c/o: Bob Cuffe

Address: [redacted]

Telephone: (Home) [redacted] (Work)

Installer: Bob Cuffe License No. 141

__xx__ New Installation ____ Existing System

____ Repair ____ Replacement ____ Extension ____ Other

Describe: Four 75' pressure dosed laterals in 3' wide trenches

Parcel Description:

Legal: S7 T36 R27

Address or Location: Tobacco Bay Estates Lot 19

Geo/Assessors code: 0000055354

Approved Design Criteria:

Bedrooms 4 Septic Tank Size: 1000/500 gallons Drainfield Size: 300 Linear Feet

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET !!

Special Instructions: INSTALL SYSTEM ACCORDING TO LAYOUT, DEQ-4 AND LINCOLN COUNTY WASTEWATER REGULATION #3. ANY DEVIATIONS FROM APPROVED PLAN MUST BE AUTHORIZED BY THE DEPARTMENT.

Issued By: Jake Mertes, R.S.

Closure Statement:

I, Robert Cuffe, *have inspected this system and found it to be in compliance with the conditions of the permit, and the Lincoln County Wastewater Treatment and Disposal Regulation.*

Signed: [signature] *Date:* 5/24/17

Title: President, Glacier Excavating, Inc

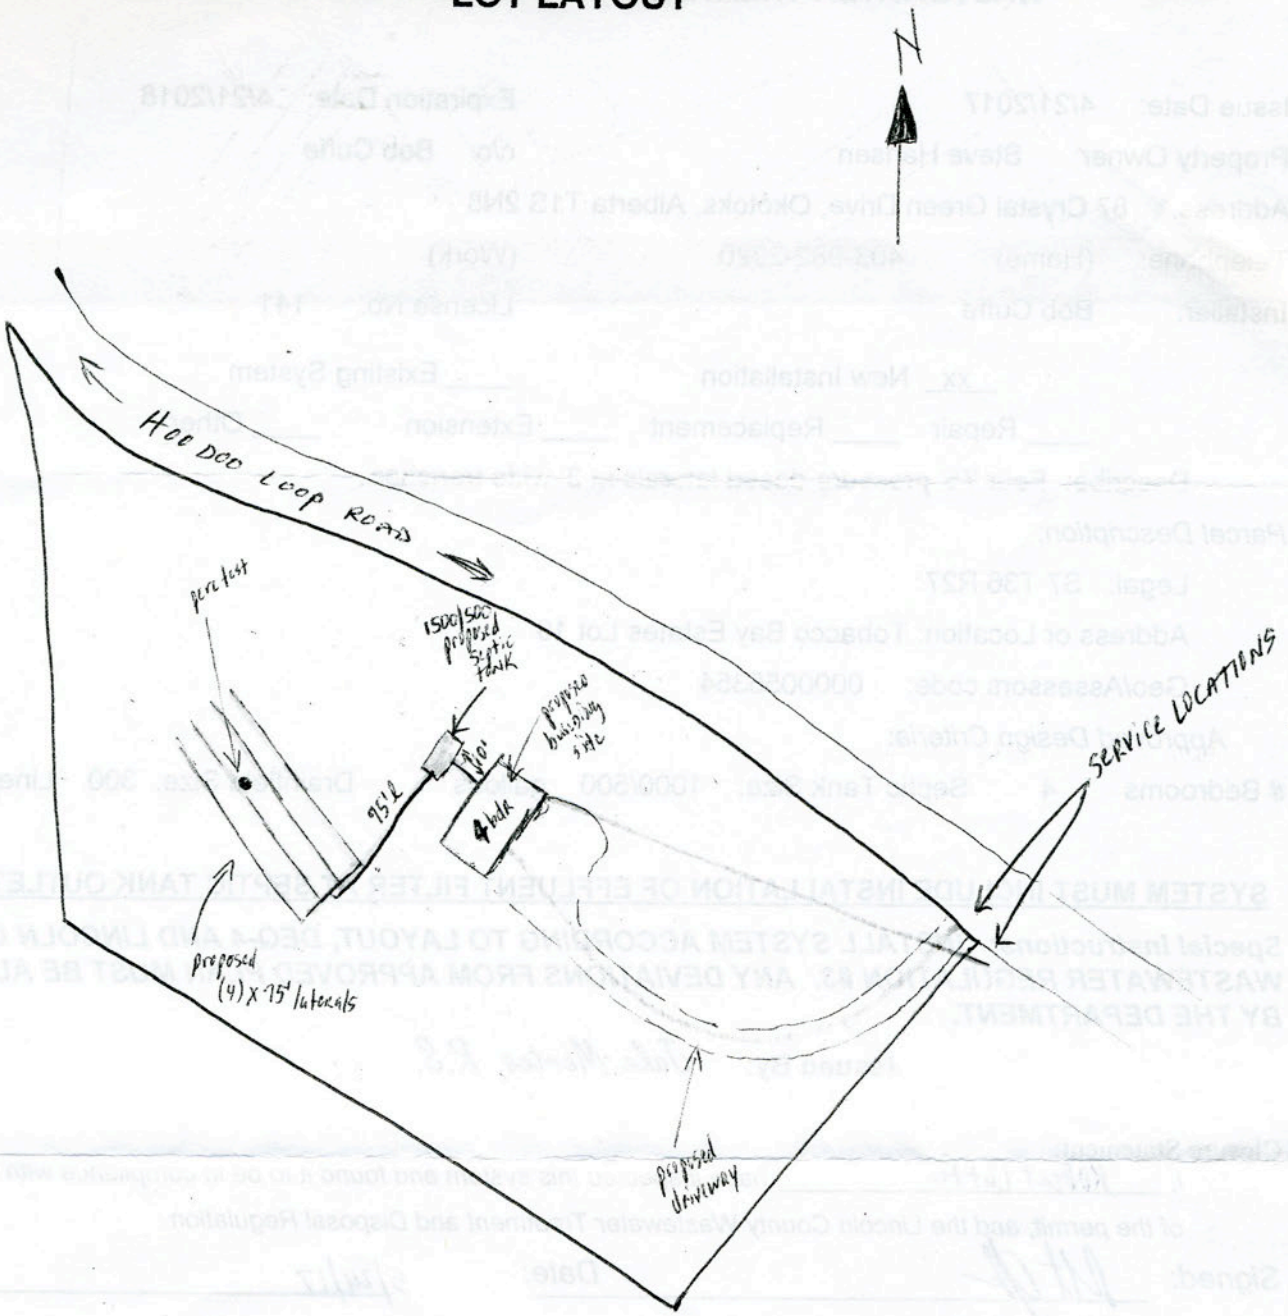
NOTICE: The Department must be notified at least 48 hours prior to backfilling the system. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation No. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.

406-283-2442

DISCLAIMER

This permit is not a guarantee by the Department that the system will function properly for a prescribed period of time.

LOT LAYOUT


N
Hoe Doo Loop Road
perc test
1500/500 gal proposed septic tank
proposed building site
90'
95'
4 bdrm
proposed (4) x 75' laterals
SERVICE LOCATIONS
proposed driveway
proposed h2o Route
proposed power Route