LINCOLN COUNTY
DEPARTMENT OF ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 03/27/2015 Expiration Date: 03/28/2016

Property Owner: Dave Friss c/o:

Address: [redacted]

Telephone: (Home) [redacted] (Work)

Installer: Thompson Contracting License No. 73

__XX__ New Installation _____ Existing System

_____ Repair _____ Replacement _____ Extension _____ Other

Describe: Using gravelless chambers – sizing reduction allowed per "Drainfield Size" below

Parcel Description:

Legal: MW-1/4 SW-1/4 S14 T30 R31

Address or Location: Lot 10 in Block 1 of Vaughn Acres

Approved Design Criteria:

Bedrooms: 3 Septic Tank Size: 1000 gallons Drainfield Size: 148 Linear Feet

Or 300 GPD maximum flows for non-residential

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET !!

Special Instructions: INSTALL SYSTEM ACCORDING TO LAYOUT, DEQ-4 AND LINCOLN COUNTY WASTEWATER REGULATION #3. ANY DEVIATIONS FROM APPROVED PLAN MUST BE AUTHORIZED BY THE DEPARTMENT.

Issued By: *Kendra J. Lind, R.S.*

Closure Statement:

I, _____, have inspected this system and found it to be in compliance with the conditions of the permit, and the Lincoln County Wastewater Treatment and Disposal Regulation.

Signed: _____ *Date:* _____

Title: _____

NOTICE: The Department must be notified at least 48 hours prior to backfilling the system. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation No. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.

406-283-2442


DISCLAIMER

This permit is not a guarantee by the Department that the system will function properly for a prescribed period of time.

LOT LAYOUT

VAUGHN ACRES BLOCK 1 LOT 10

SECTION 14, TWP30N, R31W, MPM
LINCOLN COUNTY, MONTANA

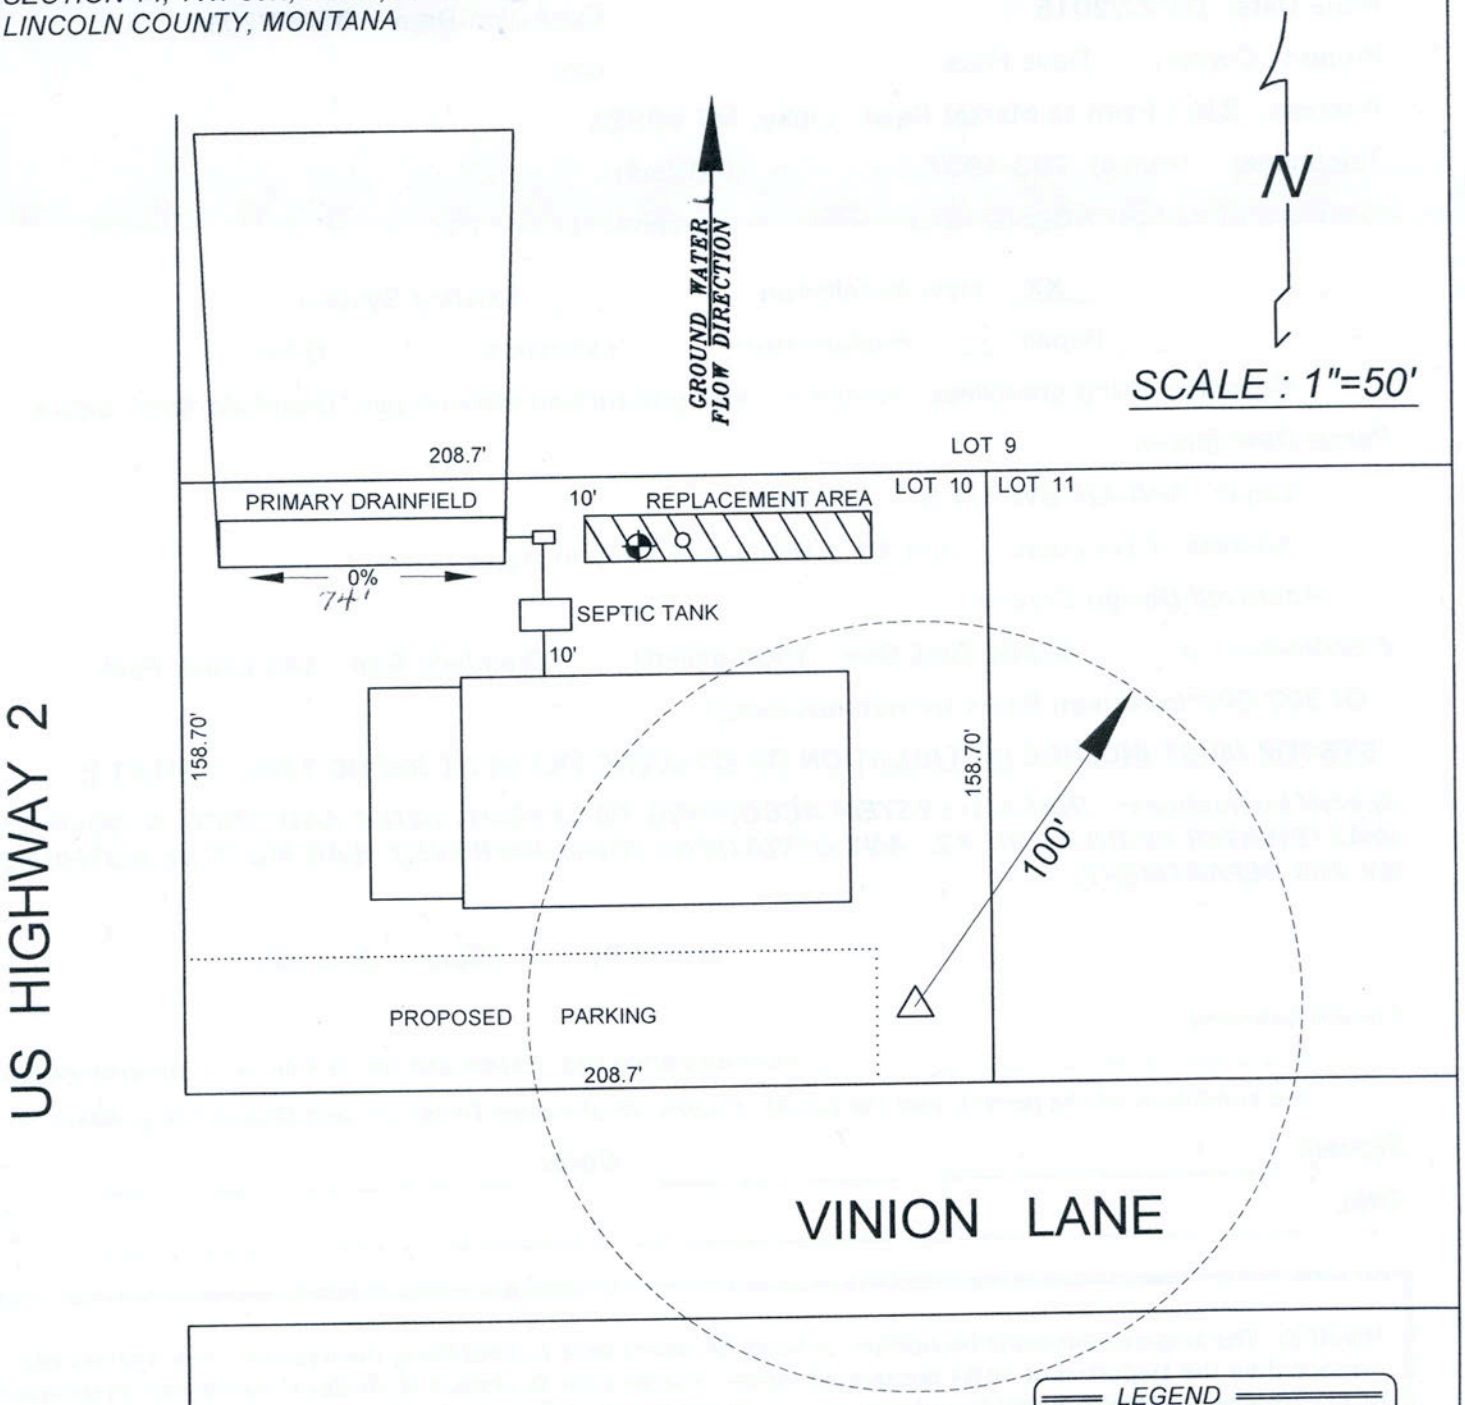

** NOTES **

NO WELLS OR DRAINFIELDS WITHIN 100' OF PROPERTY BOUNDARY OTHER THAN SHOWN.

LOT 10 = 0.76 ACRES

LEGEND

- PROPOSED OR EXISTING WELL SITE
- SOIL TEST SITE
- PERK TEST SITE
- PROPOSED STRUCTURE SITE
- PROPOSED DRAINFIELD AND REPLACEMENT AREA

KOOTENAI SURVEYORS, INC.
314 CALIFORNIA AVE. LIBBY, MONTANA (406)293-4354