LINCOLN COUNTY
DEPARTMENT OF ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 06/27/2013 Expiration Date: 06/28/2014

Property Owner: Don Baney c/o: Oedewaldt Construction, Inc.

Address: [redacted]

Telephone: (Home) (Work) [redacted]

Installer: Terry Oedewaldt License No. 2

____ New Installation __XX__ Existing System

__XX__ Repair _____ Replacement _____ Extension _____ Other

Describe: Repairing failing dry-well system – cleaned saturated field area and re-rocked in place.

Parcel Description:

Legal:

Address or Location: 173 Forest Avenue

Approved Design Criteria:

Bedrooms: 3 Septic Tank Size: 1000 gallons Drainfield Size: 3-ring Drywell System

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET !!

Special Instructions: INSTALL SYSTEM ACCORDING TO LAYOUT, DEQ-4 AND LINCOLN COUNTY WASTEWATER REGULATION #3. ANY DEVIATIONS FROM APPROVED PLAN MUST BE AUTHORIZED BY THE DEPARTMENT.

Issued By: *Kendra J. Lind, R.S.*

Closure Statement:

I, _____, have inspected this system and found it to be in compliance with the conditions of the permit, and the Lincoln County Wastewater Treatment and Disposal Regulation.

Signed: _____ *Date:* _____


Title: _____

NOTICE: The Department must be notified at least 48 hours prior to backfilling the system. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation No. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.

406-283-2442

DISCLAIMER

This permit is not a guarantee by the Department that the system will function properly for a prescribed period of time.

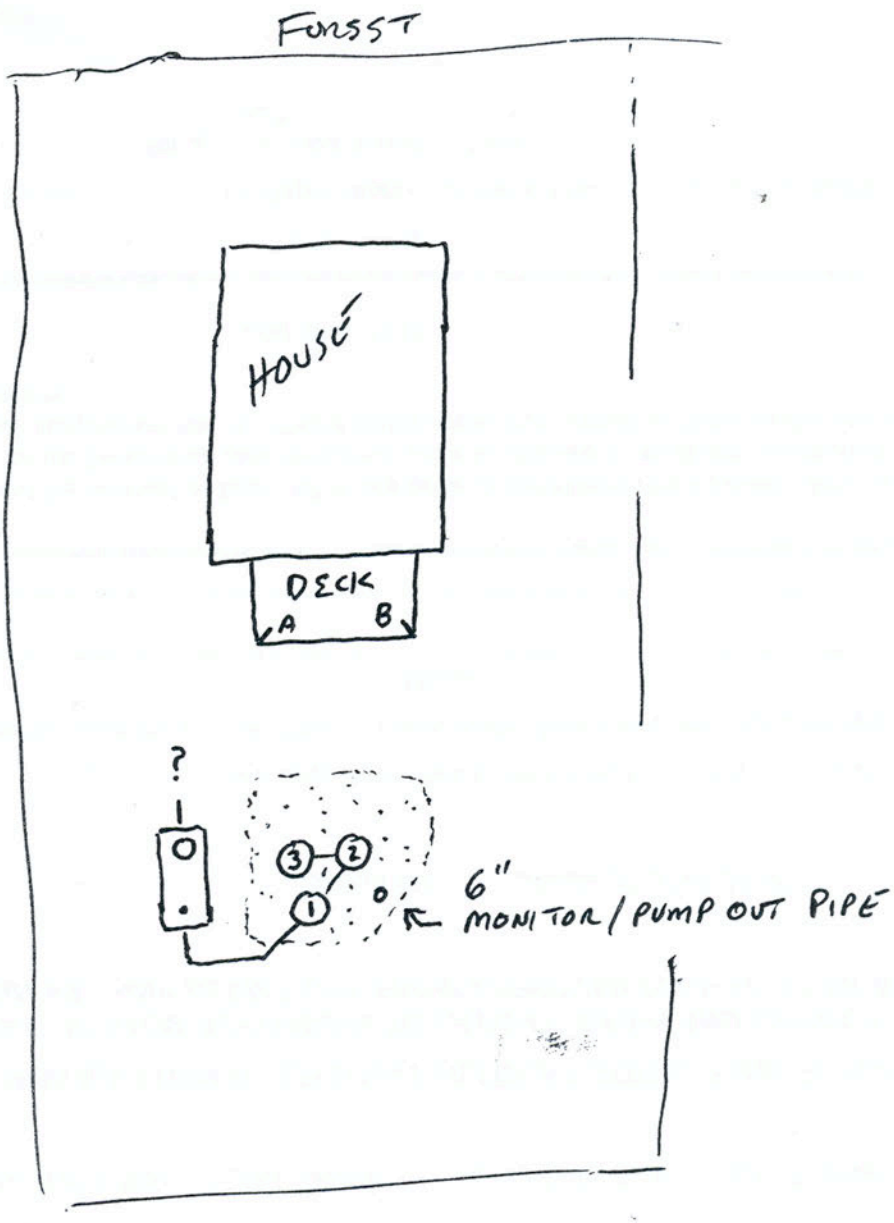

LOCATIONS FROM DECK POSTS

	A	B
INLET	33'10	46'6
OUTLET	40'3	50'8
DW 1	36'6	43'1
DW 2	33'5	38'9
DW 3	33'3	40'10
MONITOR	40'7	44'0