LINCOLN COUNTY
DEPARTMENT OF ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 10/04/2012 Expiration Date: 10/05/2013

Property Owner: Dave Colbert c/o:

Address: [redacted]

Telephone: (Home) (Work)

Installer: Koocanusa Excavating, Inc. License No. 135

__XX__ New Installation _____ Existing System

_____ Repair _____ Replacement _____ Extension _____ Other

Describe: Installing system for 3-bedroom residence and garage/shop with lavatory (4-bedroom equivalency drainfield sizing). Using gravelless chambers – sizing reduction allowed per "Drainfield Size" below.

Parcel Description:

Legal: SE-1/4 S2 T37 R27 Lot 3 in Rolling Meadows

Address or Location: 2449 Airport Road

Approved Design Criteria:

Bedrooms: 3 Septic Tank Size: 1000 gallons Drainfield Size: 168 Linear Feet

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET !!

Special Instructions: INSTALL SYSTEM ACCORDING TO LAYOUT, DEQ-4 AND LINCOLN COUNTY WASTEWATER REGULATION #3. ANY DEVIATIONS FROM APPROVED PLAN MUST BE AUTHORIZED BY THE DEPARTMENT.

Issued By: *Kendra J. Lind, R.S.*

Closure Statement:

I, _____, have inspected this system and found it to be in compliance with the conditions of the permit, and the Lincoln County Wastewater Treatment and Disposal Regulation.

Signed: _____ *Date:* _____

Title: _____

NOTICE: The Department must be notified at least 48 hours prior to backfilling the system. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation No. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.


406-283-2442

DISCLAIMER

This permit is not a guarantee by the Department that the system will function properly for a prescribed period of time.

REV	DESCRIPTION	BY/DATE	APPD/DATE

AIRPORT ROAD

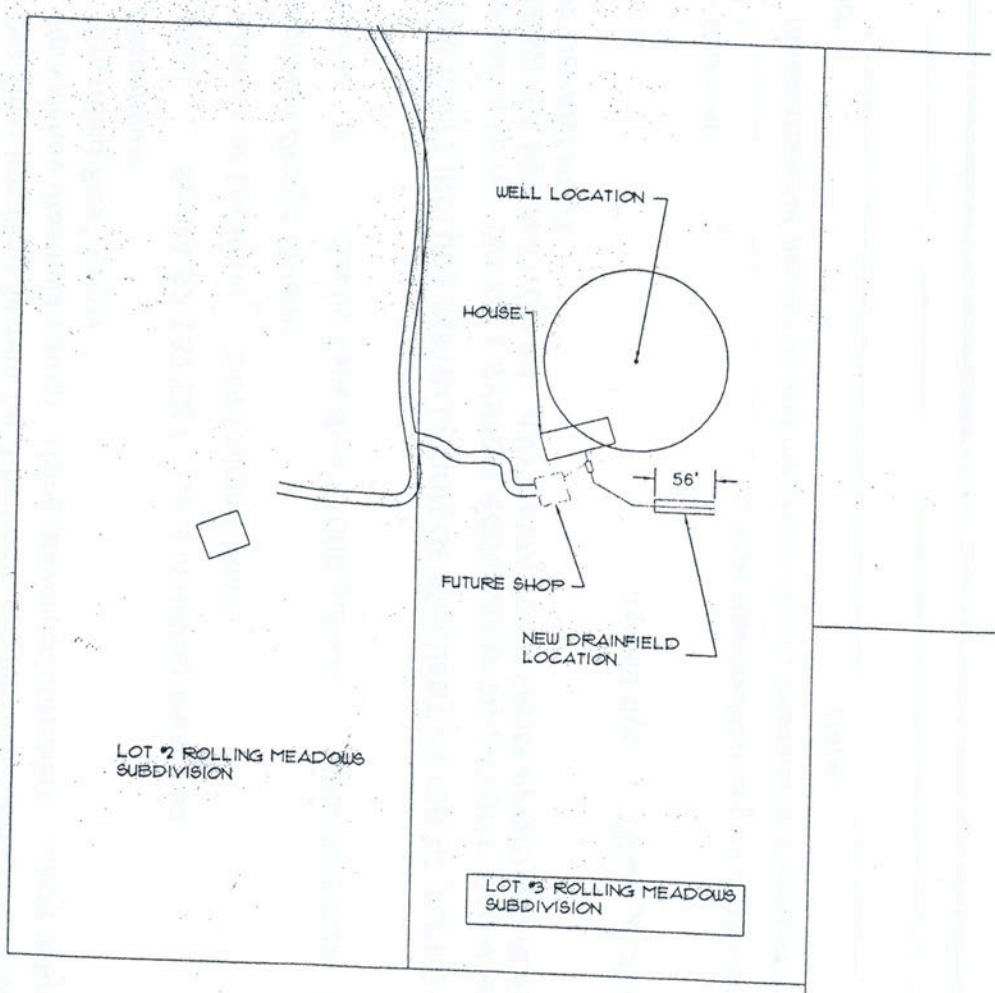



UPDATED 10-2-12

COLBERT SEPTIC PERMIT SITE LAYOUT

⑥ ⑤ ④ ③ ②

REV	DATE	COMPANY	SCALE:	KOOCANUSA EXCAVATING COLBERT PROJECT
		KEI	1/16 = NOTED	SEPTIC LAYOUT
		CONTRACT: KEI15612	DATE: 9/14/12	9/21/12
		PLOT FILE: PWL-0001	WEIGHT:	D. COLBERT 9/21/12
			FINISH	05312-001 1