LINCOLN COUNTY
DEPARTMENT OF ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 05/22/2012 Expiration Date: 05/23/2013

Property Owner: Trevor Mitzel c/o: Koocanusa Excavating

Address: [redacted]

Telephone: (Home) (Work)

Installer: Koocanusa Excavating License No. 135

__XX__ New Installation _____ Existing System

_____ Repair _____ Replacement _____ Extension _____ Other

Describe: Installing elevated sand mound system to replace outhouse.

Parcel Description:

Legal: S27 T36 R26

Address or Location: 360 Glen Lake Drive

Approved Design Criteria:

Bedrooms: 5 Septic Tank Size: 1500 gallons Drainfield Size: 400 Square Feet

Dosing Tank Size: 500 gallons

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET !!

Special Instructions: INSTALL SYSTEM ACCORDING TO LAYOUT, DEQ-4 AND LINCOLN COUNTY WASTEWATER REGULATION #3. ANY DEVIATIONS FROM APPROVED PLAN MUST BE AUTHORIZED BY THE DEPARTMENT.

Issued By: *Kendra J. Lind, R.S.*

Closure Statement:

I, _____, have inspected this system and found it to be in compliance with the conditions of the permit, and the Lincoln County Wastewater Treatment and Disposal Regulation.

Signed: _____ *Date:* _____

Title: _____


NOTICE: The Department must be notified at least 48 hours prior to backfilling the system. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation No. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.

406-283-2442

DISCLAIMER

This permit is not a guarantee by the Department that the system will function properly for a prescribed period of time.

REV.	DESCRIPTION	BY/DATE	APP'D/DATE

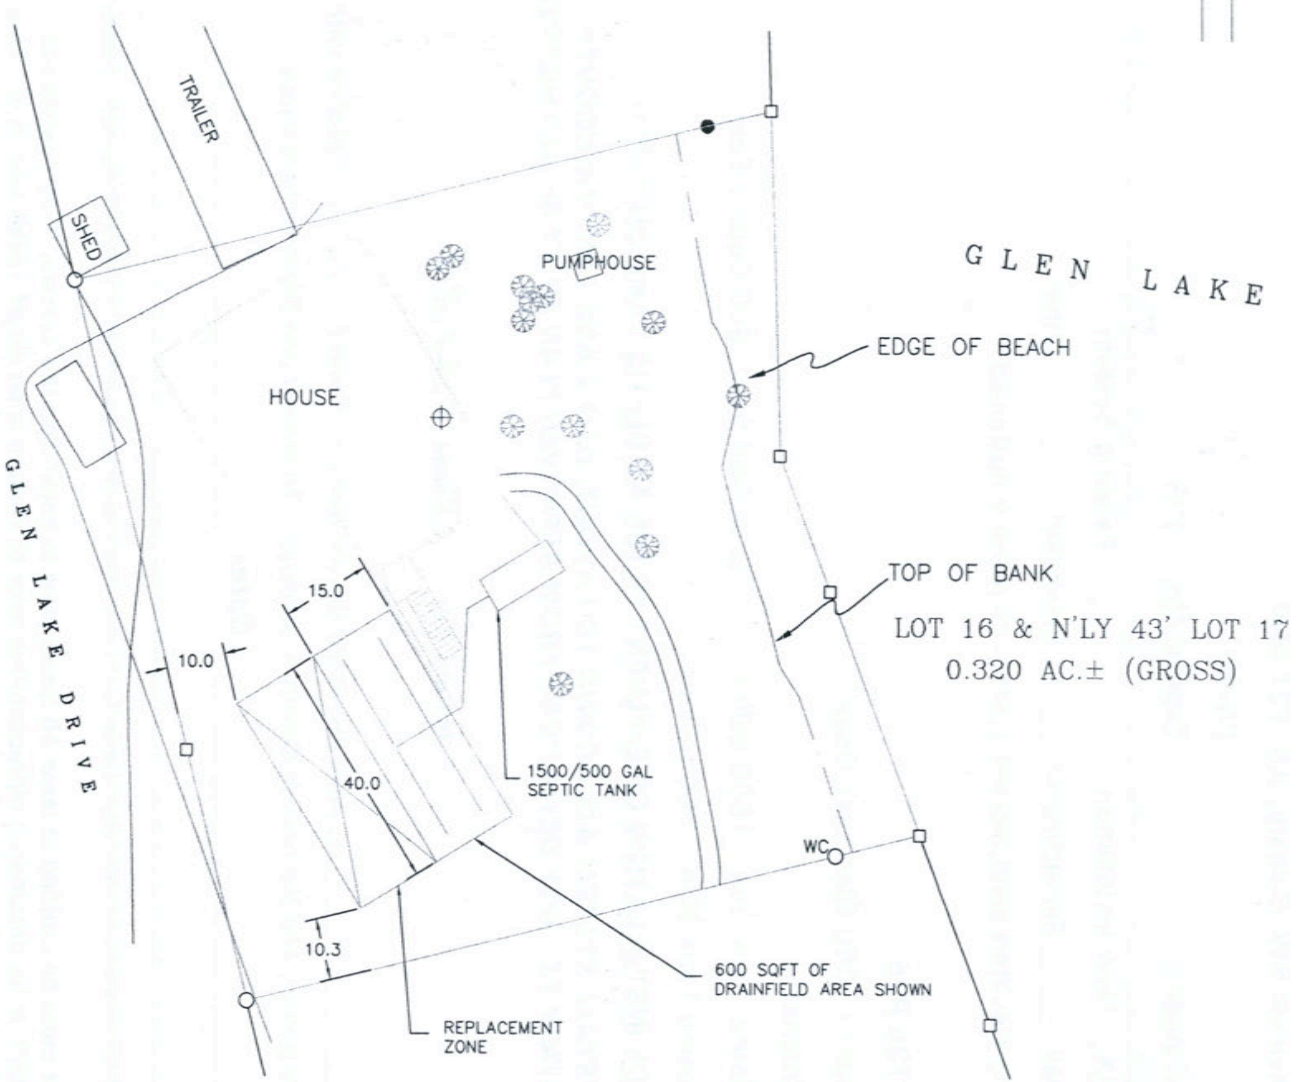

MITZEL SEPTIC PERMIT -NEW SITE LAYOUT

REV.	DATE	COMPANY: KEI	SCALE: 1/16 = NOTED	KOOCANUSA EXCAVATING MITZEL PROJECT
		CONTRACT:	DATE: 5/11/12	NEW SITE
		VERBAL	WEIGHT:	T. MITZEL 5/14/12
		PLOT FILE: PML-0001	FINISH	00612-006 1

⑥ ⑤ ④ ③ ②