LINCOLN COUNTY
DEPARTMENT OF ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 07/31/2012 Expiration Date: 08/01/2013

Property Owner: Mark O'Bleness c/o:

Address: [redacted]

Telephone: (Home) [redacted] (Work)

Installer: Terry Oedewaldt License No. 2

____ New Installation __XX__ Existing System

_____ Repair __XX__ Replacement_____ Extension _____ Other

Describe: Replacing failed system

Parcel Description:

Legal:

Address or Location: 79 Deerwood Lane

Approved Design Criteria:

Bedrooms: 3 Septic Tank Size: 1000 gallons Drainfield Size: 40 x 10 Leach Bed

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET !!

Special Instructions: INSTALL SYSTEM ACCORDING TO LAYOUT, DEQ-4 AND LINCOLN COUNTY WASTEWATER REGULATION #3. ANY DEVIATIONS FROM APPROVED PLAN MUST BE AUTHORIZED BY THE DEPARTMENT.

Issued By: *Kendra J. Lind, R.S.*

Closure Statement:

I, _____, have inspected this system and found it to be in compliance with the conditions of the permit, and the Lincoln County Wastewater Treatment and Disposal Regulation.

Signed: _____ *Date:* _____

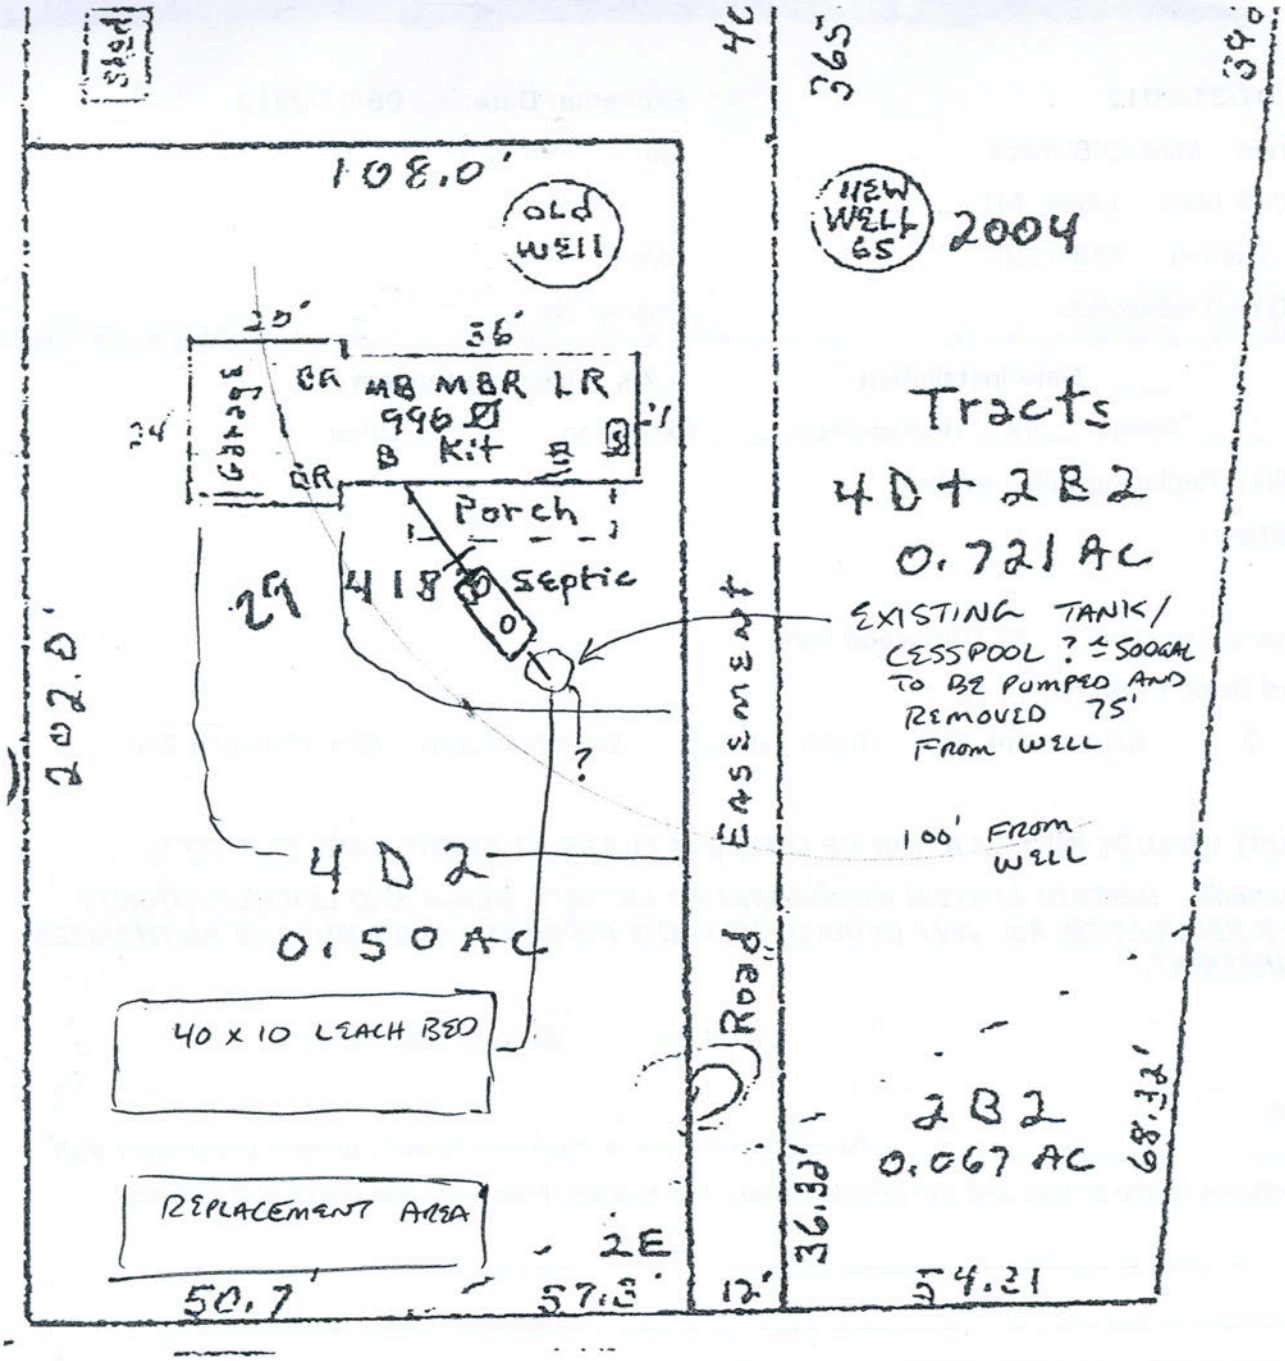
Title: _____

NOTICE: The Department must be notified at least 48 hours prior to backfilling the system. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation No. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.

406-283-2442

DISCLAIMER

This permit is not a guarantee by the Department that the system will function properly for a prescribed period of time.


108.0'
OLD WELL
NEW WELL 65
2004
25'
36'
GR
MB MBR LR
996
B Kit B
GR
Garage
Porch
29
418
Septic
EXISTING TANK/ CESSPOOL ? ± 500GAL TO BE PUMPED AND REMOVED 75' FROM WELL
100' FROM WELL
202.0'
4D2
0.50 AC
40 x 10 LEACH BED
REPLACEMENT AREA
50.7'
57.3'
2E
Easement
Road
12'
Tracts
4D+2B2
0.721 AC
2B2
0.067 AC
36.32'
54.21'
68.32'
U.S. Highway 2 W
(4183 / 29) (4191 / 57) (4205 / 59) (4221 / 61)