LINCOLN COUNTY
DEPARTMENT OF ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 07/14/2010 Expiration Date: 07/15/2011

Property Owner: Blake Beecher c/o: Koocanusa Excavating, Inc.

Address: [redacted]

Telephone: (Home) (Work) [redacted]

Installer: Koocanusa Excavating, Inc. License No. 135

__XX__ New Installation _____ Existing System

_____ Repair _____ Replacement _____ Extension _____ Other

Describe: Installing pressure-dosed system in 3-foot wide trenches.

Parcel Description:

Legal: Crystal Lkes Subdivision Unit #1

Address or Location: Lot 92

Approved Design Criteria:

Bedrooms: 2 Septic Tank Size: 1000 gallons Drainfield Size: 134 Linear Feet

Dosing Tank Size: 500 gallons

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET !!

Special Instructions: INSTALL PRESSURE-DOSED SYSTEM ACCORDING TO LAYOUT, DEQ-4 AND LINCOLN COUNTY WASTEWATER REGULATION #3. ANY DEVIATIONS FROM APPROVED PLAN MUST BE AUTHORIZED BY THE DEPARTMENT.

Issued By: *Kendra J. Lind, R.S.*

Closure Statement:

I, _____, have inspected this system and found it to be in compliance with the conditions of the permit, and the Lincoln County Wastewater Treatment and Disposal Regulation.

Signed: _____ *Date:* _____

Title: _____


NOTICE: The Department must be notified at least 48 hours prior to backfilling the system. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation No. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.

406-293-7781

DISCLAIMER

This permit is not a guarantee by the Department that the system will function properly for a prescribed period of time.

REV	DESCRIPTION	BY/DATE	APPRD/DATE

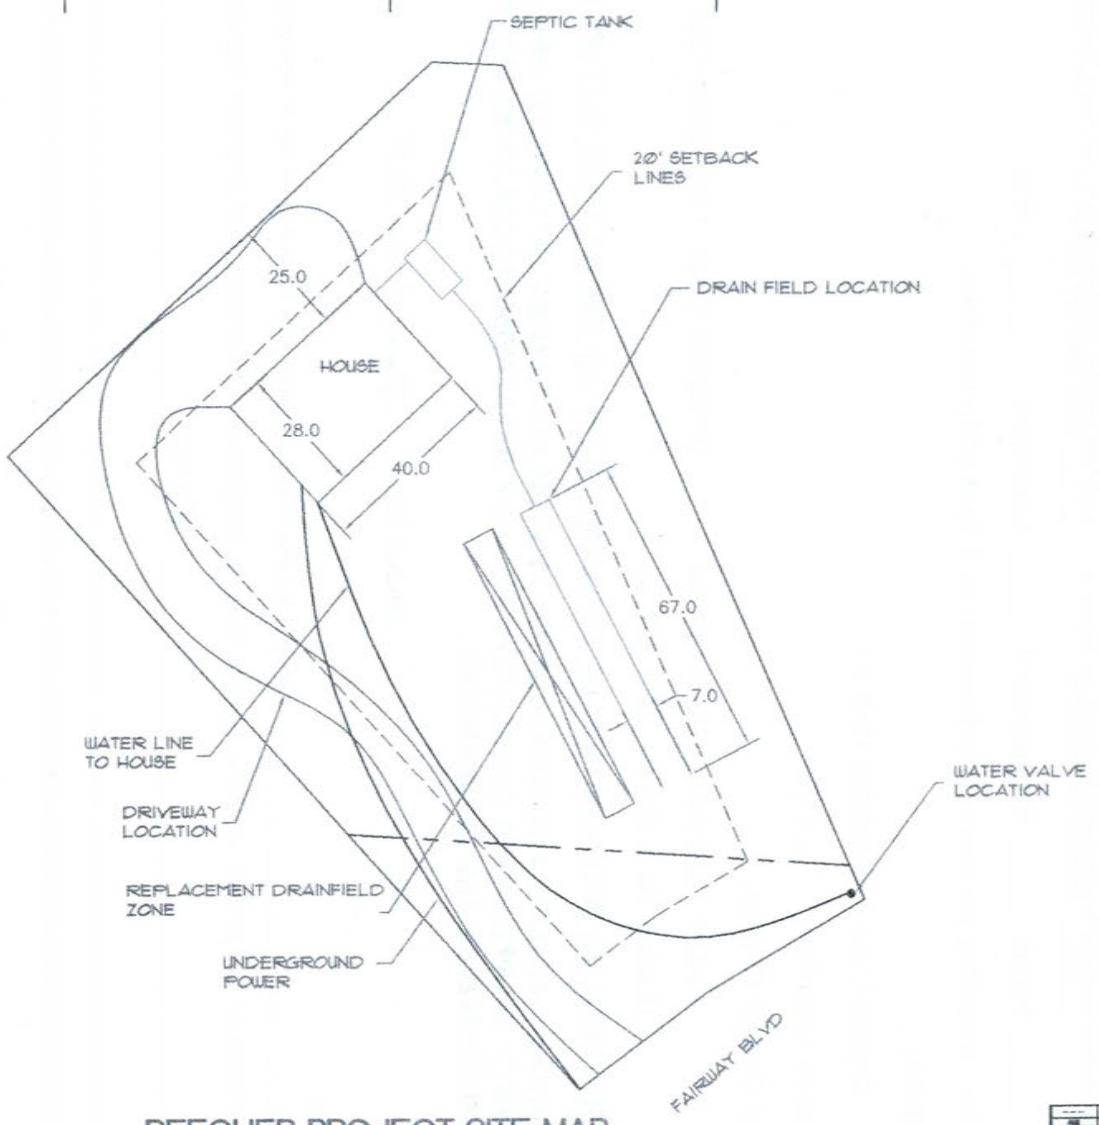

UPDATED 7-8-10

BEECHER PROJECT SITE MAP

			SITE MAP			
DRAWN	CHECKED	APPROVED	MATERIAL			
DATE	COMPANY	SCALE:			KOOCANUSA EXCAVATING, INC. SEPTIC PERMIT MAP	
	KEI	1/16 = 1'-0"			BEECHER PROJECT	
	CONTRACT:	DATE:				8/17/10
	MDS11405	11/7/05				8/20/10
	PLOT FILE:	WEIGHT:				1
	RL-0001		FINISH		033110-001	

⑥ ⑤ ④ ③ ②