LINCOLN COUNTY HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 02/27/2026 Expiration Date: 02/26/2027 Permit# 26-9318 A

Property Owner: Rivers Edge Trust

Mailing Address: [redacted]

Installer: Terry Oedewaldt License #: 2

Approved Work: (Check One) ☐ New Installation ☒ Existing System

☒ Replace Drainfield ☒ Replace Tank ☐ Extension

Describe: Installation of new pressure dosed system to replace failing system for (2) 2 Bedroom Trailers.

Legal: S30, T31 N, R30 W, ACRES 8, TR 1C IN S2 Lots 13 & 14

Property Address: 4160 MT HWY 37, Libby, MT 59923 Assessment Code: 9318

DEQ COSA: E.Q.# Date:

Approved Design Criteria: Installation of new pressure dosed system to replace failing system for (2) 2 Bedroom Trailers with 2 Laterals @ 70' with reduction for chambers.

# of Bedrooms: (2) 2 Bedroom Trailers Septic Tank Size: 1500/500 gallons Trench Depth: 24"-36"

# of Laterals: 2 Length of Laterals: 70' Trench Width: 36"

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET!!

Special Instructions: Install system according to the COSA, lot layout, the Lincoln County Wastewater Treatment and Disposal Regulation, and Circular DEQ-4. Reduction given for chambers. It is the installer's responsibility to ensure that all required horizontal setbacks are met. CHANGES MUST BE PRE-AUTHORIZED BY THE DEPARTMENT.

Issued By: *Robin Blumberg, RS*

NOTICE: The Department must be notified at least 3 business days (72 hours) prior to backfilling the system. Call 406-283-2442. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation Ch. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.

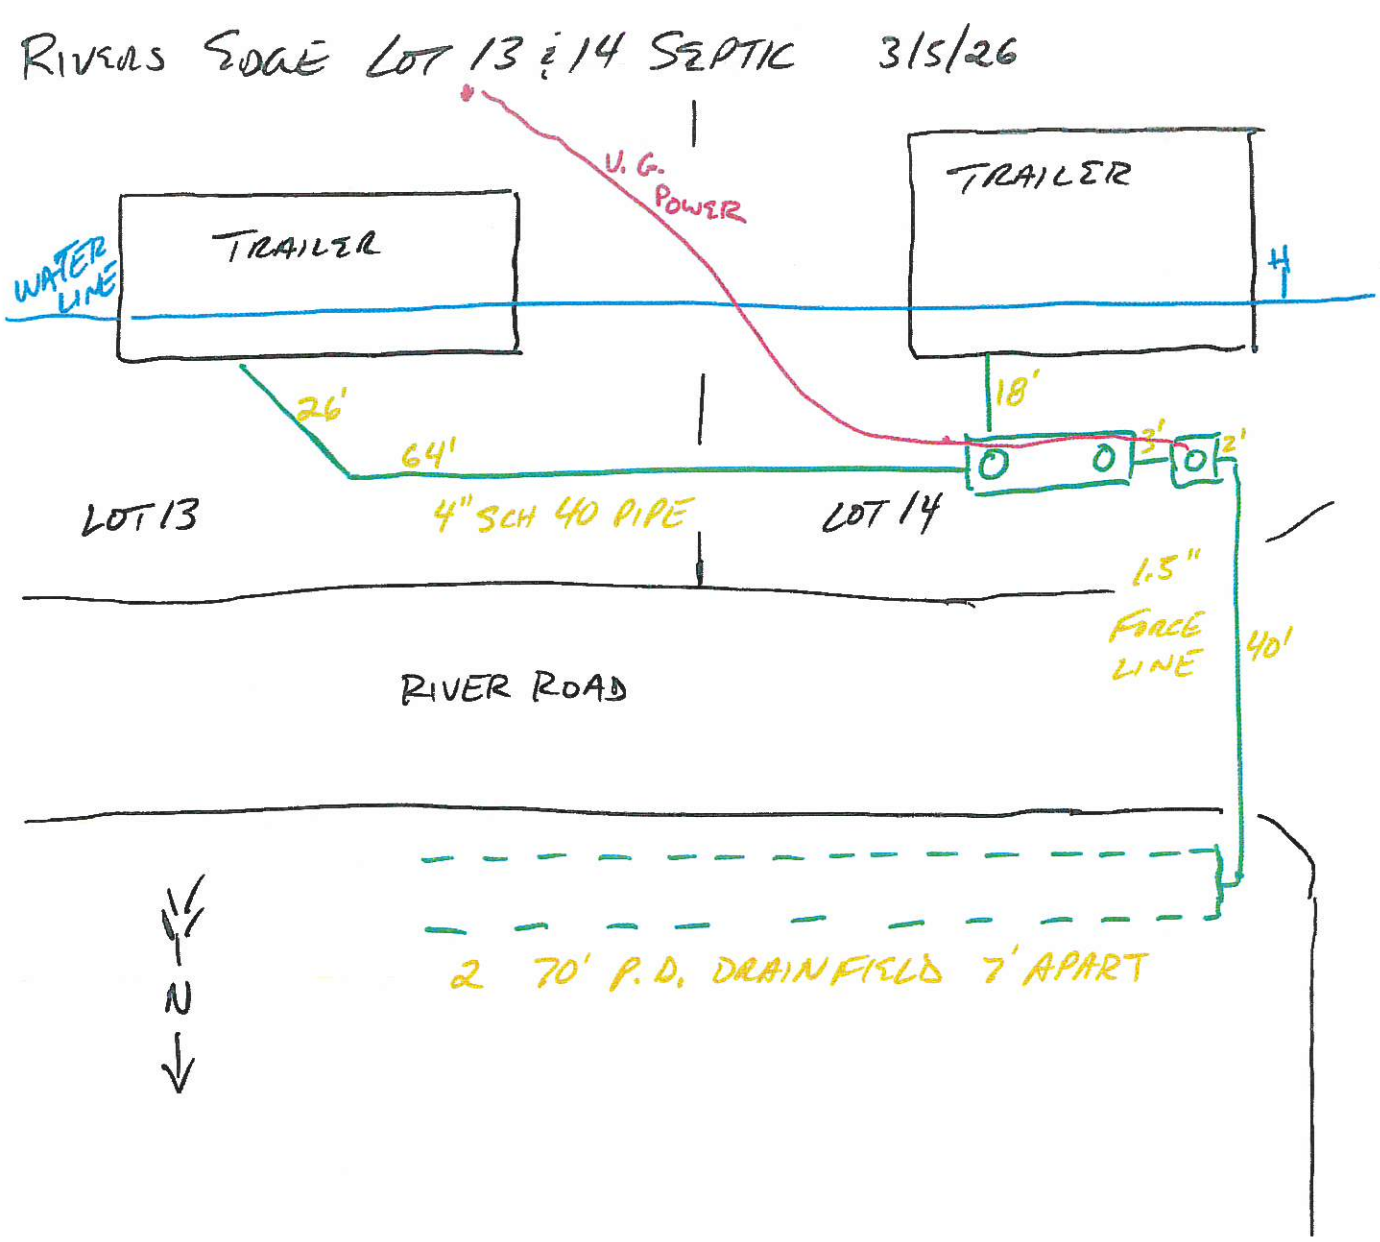
Closure Statement:

This system is in compliance with the approved design criteria and Lincoln County's Wastewater Treatment and Disposal Regulation.

Signed: Robin Blumberg Date: 3/4/26

This permit is not finalized until the system is inspected and the closure statement is signed.

This permit is not a guarantee that the system will function properly for a prescribed period of time.


RIVERS EDGE LOT 13 & 14 SEPTIC 3/5/26
U. G. POWER
TRAILER
TRAILER
WATER LINE
H
26'
64'
18'
3'
2'
LOT 13
4" SCH 40 PIPE
LOT 14
1.5"
FORCE LINE
40'
RIVER ROAD
N
2 70' P. D. DRAINFIELD 7' APART