LINCOLN COUNTY HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 01/29/2026 Expiration Date: 01/28/2027 Permit#26-52743

Property Owner: Charles Gehlen

Mailing Address: [redacted]

Installer: Scott Pardee License #: 229

Approved Work: (Check One) ☒ New Installation ☐ Existing System

☐ Replace Drainfield ☐ Replace Tank ☐ Extension

Describe: Installation of new Deep Absorption pressure dosed system for 4 Bedroom House.

Legal: LAKE CREEK RANCH PH 2, S17, T30 N, R33 W, LOT8A, ACRES 5.84, CS 4612

Property Address: 148 Crow Ct. Troy, MT 59935 Assessment Code: 52743

DEQ COSA: E.Q.# 19-1680 Lake Creek Ranch PH 2 Date: 04/15/19

Approved Design Criteria: Installation of new Deep Absorption pressure dosed system for 4 Bedroom House with 2 Laterals @ 97'.

# of Bedrooms: 4 Septic Tank Size:1500/500 Gallons Trench Width: 36"

# of Laterals: 2 Length of Laterals: 97' Trench Depth: 24"-36"

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET!!

Special Instructions: Install system according to the COSA, lot layout, the Lincoln County Wastewater Treatment and Disposal Regulation, and Circular DEQ-4. It is the installer's responsibility to ensure that all required horizontal setbacks are met. CHANGES MUST BE PRE-AUTHORIZED BY THE DEPARTMENT.

Issued By: *Robin Blumberg, RS*

NOTICE: **The Department must be notified at least 3 business days (72 hours) prior to backfilling the system. Call 406-283-2442. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation Ch. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.**

Closure Statement:

This system is in compliance with the approved design criteria and Lincoln County's Wastewater Treatment and Disposal Regulation.

Signed: Robin Blumberg *Date:* 4/20/26


This permit is not finalized until the system is inspected and the closure statement is signed.


This permit is not a guarantee that the system will function properly for a prescribed period of time.

LINCOLN COUNTY MONTANA

LOT LAYOUT:

REVISED LOTS 7 & 8 OF LAKE CREEK RANCH PHASE 2 PLAT NO. 7177
In the E1/2 SE1/4 of Section 17, Twp. 30 N., R. 33 W., P.M.M.
For: Douglas Jensen Thomas & Deann Thomas Joint Living Trust Date: September 2018



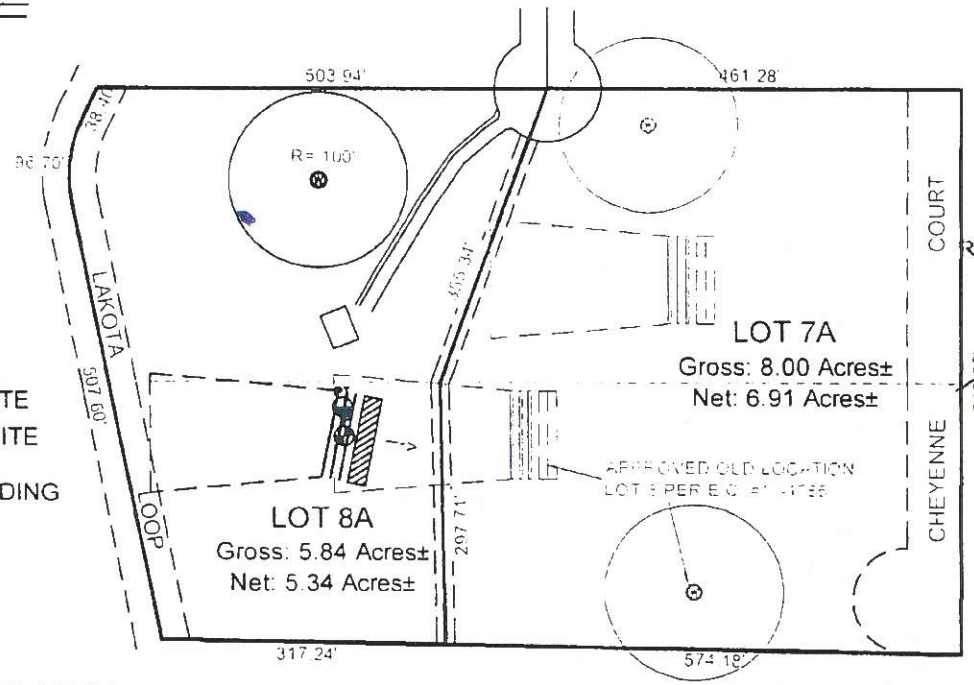

Reviewed by the Local Reviewing Authority
Under contract with the
Department of Environmental Quality

Local Reviewer 4/15/19 Date

EQ#19-1680
Accepted under contract

Janet Shoaland 4/17/19
DEQ Representative Date

LEGEND

- PERCOLATION SITE
- SOILS PROFILE SITE
- PROPOSED BUILDING SITE
- NEW WELL SITE
- <--- SLOPE
- NEW SEPTIC SITE LOCATION
  3-100' TRENCHES 10' APART
  PER E.Q. #06-2747
- NEW REPLACEMENT SITE LOCATION
  3-100' TRENCHES 10' APART
  PER E.Q. #06-2747

Graphic Scale:
200 0 100 200
1 inch = 200 ft.

CABINET MOUNTAIN SURVEYING, LLC
TROY, MT 59935

DATE: 09/27/18	Land Projects 2013
DRAWN BY MDM	FILE 1303317thomas.dwg