LINCOLN COUNTY
DEPARTMENT OF ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 2/27/2009 Expiration Date: 2/27/2010

Property Owner: Chuck Riley c/o:

Address: [redacted]

Telephone: (Home) (Work) [redacted]

Installer: Chuck Riley License No.

Proposed Work: (Check One) _____ New Installation __X__ Existing System

_____ Repair __X__ Replacement _____ Extension _____ Other

Describe: Installing a 50-foot x 20-foot seepage bed with five 45-foot lines connected by two 15-foot lines to form a continuous loop.

Parcel Description:

Legal: S32 T31N R31W

Address or Location: Fellenberg Subdivision Lot 1, 153 Vanderwood

Approved Design Criteria:

Bedrooms 3 Septic Tank Size: 1000 Gallons Drainfield Size:

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET !!

Special Instructions: INSTALL SYSTEM ACCORDING TO LAYOUT AND LINCOLN COUNTY WASTEWATER REGULATION #3. ANY DEVIATIONS FROM APPROVED PLAN MUST BE AUTHORIZED BY THE DEPARTMENT.

Issued By: *Lori Kelley-Bowe, R.S.*

Closure Statement:

I, Lori Kelley-Bowe, *have* ~~*inspected*~~ reviewed *this system and found it to be in compliance with the conditions of the permit, and the Lincoln County Wastewater Treatment and Disposal Regulation.*

Signed: Lori Kelley-Bowe *Date:* 9/11/09

Title: Sanitarian


NOTICE: The Department must be notified at least 48 hours prior to backfilling the system. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation No. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.

406-293-7781

DISCLAIMER

This permit is not a guarantee by the Department that the system will function properly for a prescribed period of time.

50' x 20' SEEPAGE BED:
TO BE CONSTRUCTED WITH
FIVE 4" X 45' DRAINFIELD
LINES JOINED
WITH 4" X 15' LINES TO
FORM A CONTINUOUS LOOP.

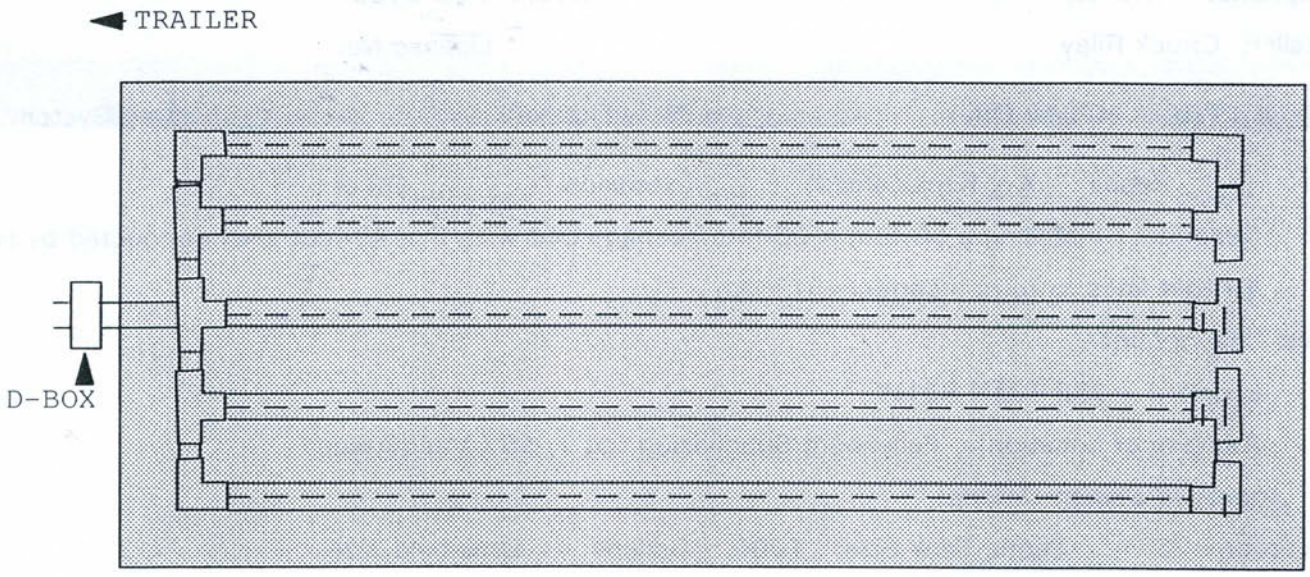

SCALE: 1" = 8'

