LINCOLN COUNTY HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 06/11/2026 Expiration Date: 06/10/2027 Permit#26-6777

Property Owner: David McCall

Mailing Address: [redacted]

Installer: Tom Cole License #: 1

Approved Work: (Check One) ☒ New Installation ☒ Existing System

☒ Replace Drainfield ☒ Replace Tank ☐ Extension

Describe: Installation of new elevated sand mound to replace failing system for (2) 2 Bedroom Houses.

Parcel Description:

Legal: S24, T31 N, R34 W, COS 70, ACRES 1.067, TR 28 IN N2NESE

Property Address: 1331 Iron Creek Rd., Troy, MT 59935 Assessment Code: 6777

DEQ COSA: E.Q.# Date:

Approved Design Criteria: Installation of new elevated sand mound to replace failing system for (2) 2 Bedroom Houses.

# of Bedrooms: (2) 2 Bedroom Houses 450 GPD Septic Tank Size: 1500/500 gallons

ESM: Absorption Area 12' X 40' Laterals: 4@40' Basal: 20' X 50'

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET!!

Special Instructions: Install system according to the COSA, lot layout, the Lincoln County Wastewater Treatment and Disposal Regulation, and Circular DEQ-4. It is the installer's responsibility to ensure that all required horizontal setbacks are met. CHANGES MUST BE PRE-AUTHORIZED BY THE DEPARTMENT.

Issued By: Robin Blumberg, RS

NOTICE: The Department must be notified at least 3 business days (72 hours) prior to backfilling the system. Call 406-283-2442. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation Ch. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.


Closure Statement:

This system is in compliance with the approved design criteria and Lincoln County's Wastewater Treatment and Disposal Regulation.

Signed: Robin Blumberg *Date:* 7/20/26

This permit is not finalized until the system is inspected and the closure statement is signed.

This permit is not a guarantee that the system will function properly for a prescribed period of time.

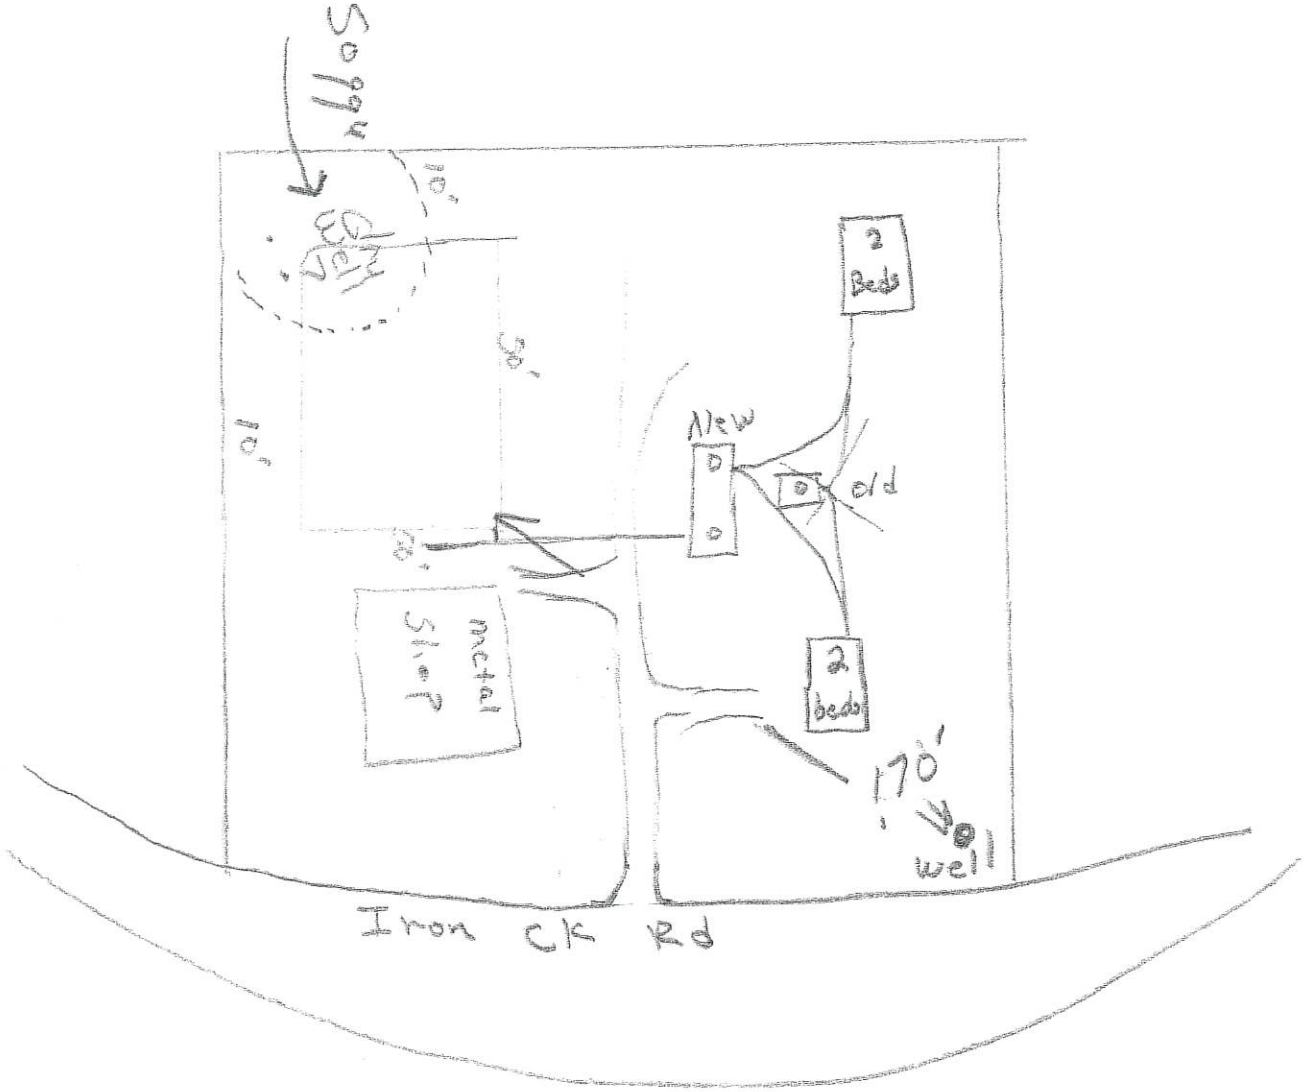

well to drain field 175'

septic tank to drain field 65'

← slope — Sorl .05

N

septic tank a bout 10' drope to drain field

slope at drain field 5%