LINCOLN COUNTY HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 08/14/2026 Expiration Date: 08/13/2027 Permit#26-11033

Property Owner: Okaga Lake Ranch LLC

Mailing Address: [redacted]

Installer: Logan Munts License #: 160

Approved Work: (Check One) ☒ New Installation ☐ Existing System

☐ Replace Drainfield ☐ Replace Tank ☐ Extension

Describe: Installation of pressure dosed system for 3 Bedroom House.

Legal: S25, T37 N, R31 W, ACRES 303.36, HES 836 &1069 LOT 5

Property Address: 15871 Vinal Lake Rd., Troy, MT 59935 Assessment Code: 11033

DEQ COSA: E.Q.# Date:

Approved Design Criteria: Installation of pressure dosed system for 3 Bedroom House with 3 Laterals @ 75' with reduction for chambers.

# of Bedrooms: 3 Septic Tank Size:1000/500 Trench Width: 36"

# of Laterals: 3 Lateral Length: 75' Trench Depth: 24"-36"

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET!!

Special Instructions: Install system according to the lot layout, the Lincoln County Wastewater Treatment and Disposal Regulation, Circular DEQ-4, and COSA(If Applies). Reduction given for chambers. It is the installer's responsibility to ensure that all required horizontal setbacks are met. CHANGES MUST BE PRE-AUTHORIZED BY THE DEPARTMENT.

Issued By: *Robin Blumberg, RS*

NOTICE: The Department must be notified at least 3 business days (72 hours) prior to backfilling the system. Call 406-283-2442. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation Ch. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.

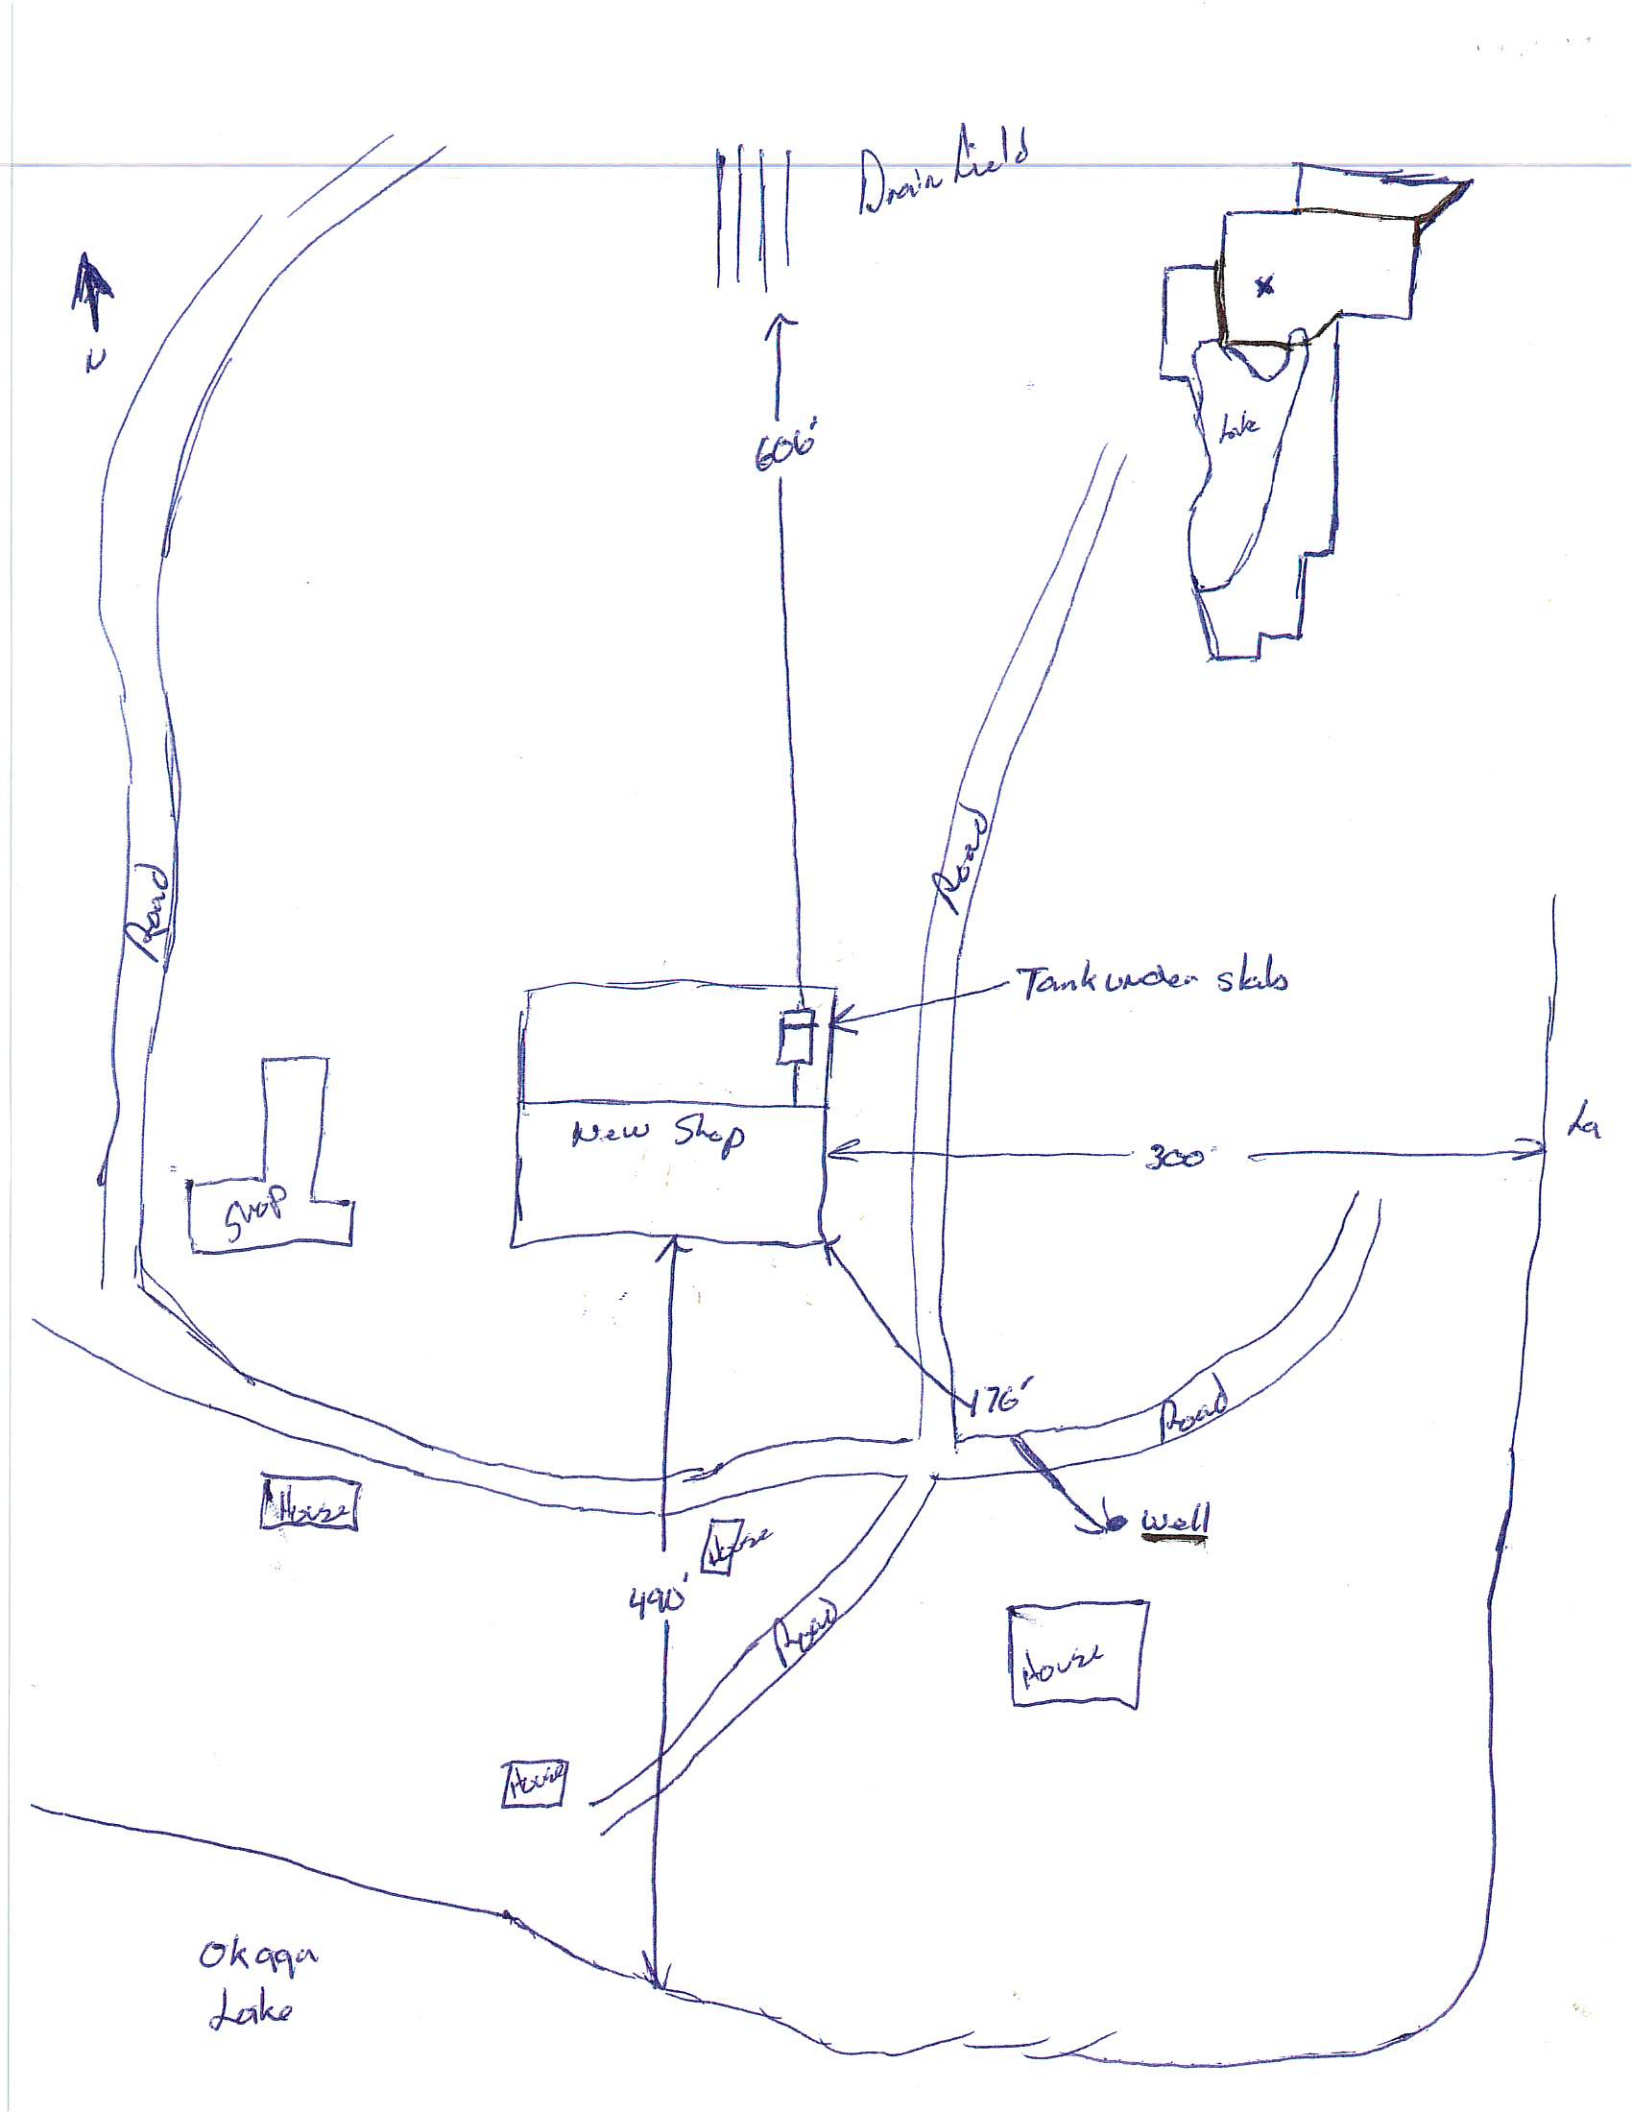
Closure Statement:

This system is in compliance with the approved design criteria and Lincoln County's Wastewater Treatment and Disposal Regulation.

Signed: _____ *Date:* _____

This permit is not finalized until the system is inspected and the closure statement is signed.

This permit is not a guarantee that the system will function properly for a prescribed period of time.


Drain field
N
606'
Lake
Road
Tank under skids
New Shop
Shop
300'
La
476'
Road
House
Well
490'
House
Road
House
Okaga
Lake