LINCOLN COUNTY HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 9/24/2026 Expiration Date: 9/23/2027 Permit#26-14561

Property Owner: Cedar Creek Holdings LLC.

Mailing Address: [redacted]

Installer: Tyler Hartz License #: 212

Approved Work: (Check One) ☒ New Installation ☐ Existing System

☐ Replace Drainfield ☐ Replace Tank ☐ Extension

Describe: Installation of pressure dosed system for 3 Bedroom House.

Legal: BARNABY HEIGHTS, S28, T35 N, R26 W, LOT 20, ACRES 1.25, PM 7081

Property Address: 102 Mckenzie Drive, Eureka, MT 59917 Assessment Code: 14561

DEQ COSA: E.Q.# 23-2694 Barnaby Heights Date: 1/16/24

Approved Design Criteria: Installation of pressure dosed system for 3 Bedroom House with 4 Laterals @ 94'.

# of Bedrooms: 3 Septic Tank Size: 1000/500 Trench Width: 36"

# of Laterals: 4 Length of Laterals: 94' Trench Depth: 24"-36"

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET!!

Special Instructions: Install system according to the lot layout, the Lincoln County Wastewater Treatment and Disposal Regulation, Circular DEQ-4, and COSA(If Applies). It is the installer's responsibility to ensure that all required horizontal setbacks are met. CHANGES MUST BE PRE-AUTHORIZED BY THE DEPARTMENT.

Issued By: *Robin Blumberg, RS*

NOTICE: The Department must be notified at least 3 business days (72 hours) prior to backfilling the system. Call 406-283-2442. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation Ch. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.

Closure Statement:

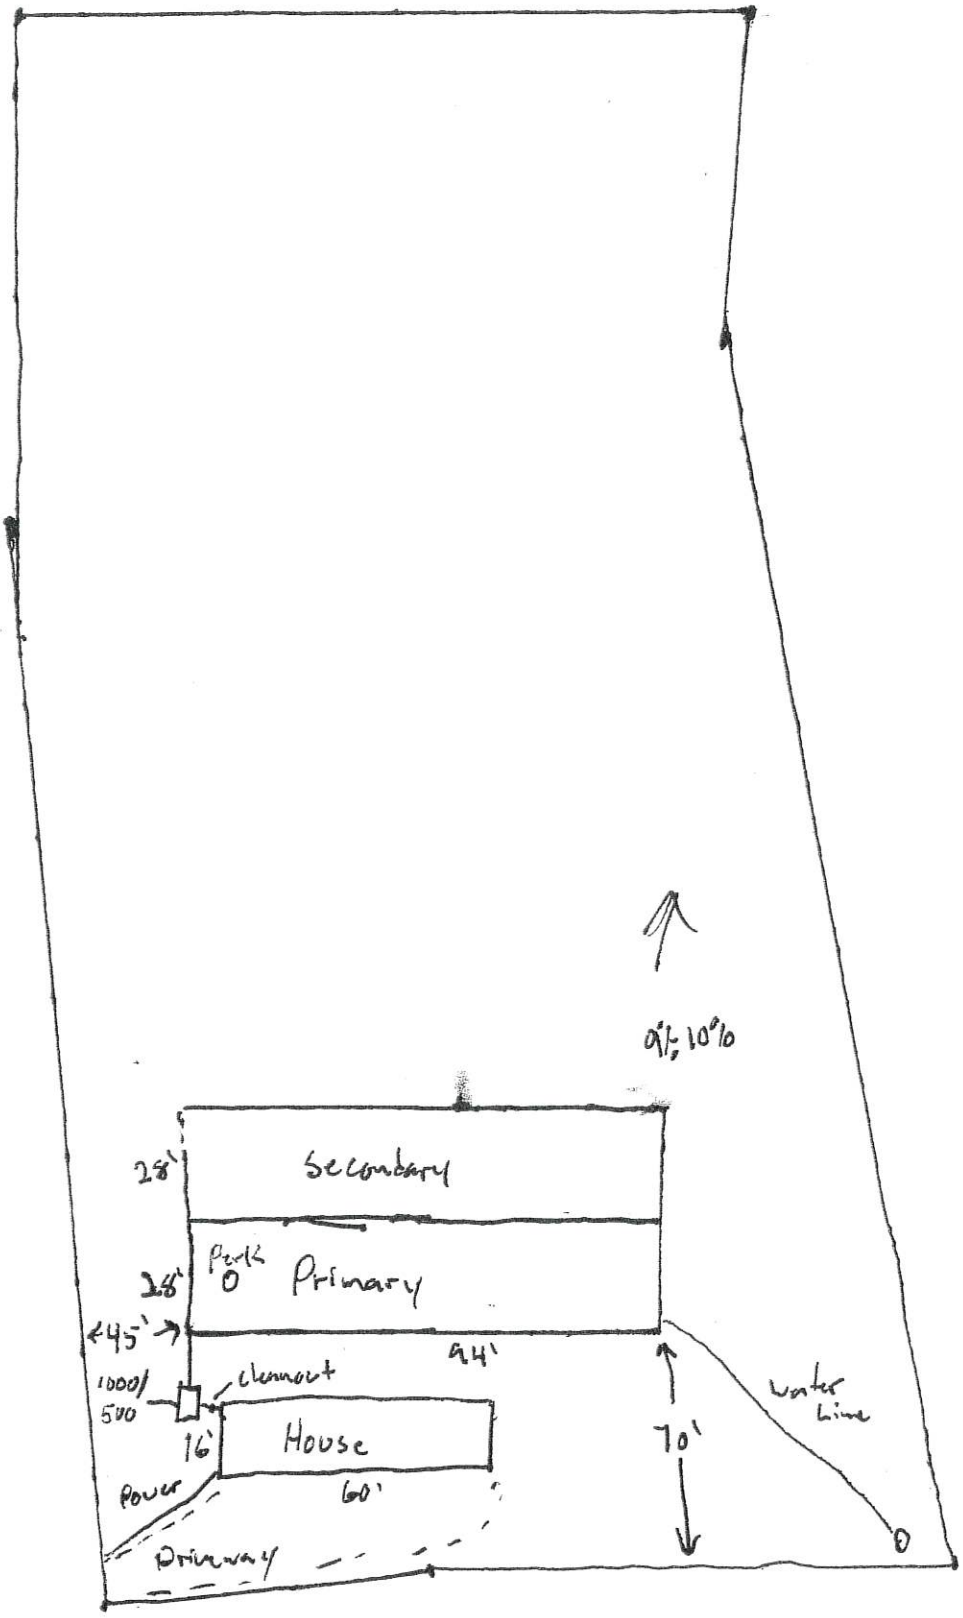
This system is in compliance with the approved design criteria and Lincoln County's Wastewater Treatment and Disposal Regulation.

Signed: _____ *Date:* _____

This permit is not finalized until the system is inspected and the closure statement is signed.

This permit is not a guarantee that the system will function properly for a prescribed period of time.

Lot 20


9%; 10%
28'
Secondary
28'
Primary
45'
94'
1000/
500
clean out
16'
House
60'
Power
Driveway
70'
Water
Line
0