LINCOLN COUNTY HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 9/9/2026 (Renewal) 08/11/2025 Expiration Date: 9/8/2027 Permit#26-6091

Property Owner: Anton Hartman

Mailing Address: [redacted]

Installer: Logan Munts License #: 160

Approved Work: (Check One) ☒ New Installation ☐ Existing System

☐ Replace Drainfield ☐ Replace Tank ☐ Extension

Describe: Installation of new pressure dosed system for 3 Bedroom House.

Legal: ANGEL ISLAND, S29, T29 N, R33 W, BLOCK 3, LOT 32

Property Address: 649 Halo Dr., Troy, MT 59935 Assessment Code: 6091

DEQ COSA: E.Q.# 27-70-480 Angel Island Date: 7/9/70

Approved Design Criteria: Installation of new pressure dosed system for 3 Bedroom House with 3 Laterals @ 50' with reduction for chambers.

# of Bedrooms: 3 Septic Tank Size: 1000/500 Trench Width: 36"

# of Laterals: 3 Length of Laterals: 50' Trench Depth: 24"-36"

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET!!

Special Instructions: Install system according to the lot layout, the Lincoln County Wastewater Treatment and Disposal Regulation, Circular DEQ-4, and COSA(If Applies). Reduction given for chambers. It is the installer's responsibility to ensure that all required horizontal setbacks are met. CHANGES MUST BE PRE-AUTHORIZED BY THE DEPARTMENT.

Issued By: *Robin Blumberg, RS*

NOTICE: The Department must be notified at least 3 business days (72 hours) prior to backfilling the system. Call 406-283-2442. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation Ch. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.

Closure Statement:


This system is in compliance with the approved design criteria and Lincoln County's Wastewater Treatment and Disposal Regulation.

Signed: _____ *Date:* _____

This permit is not finalized until the system is inspected and the closure statement is signed.

This permit is not a guarantee that the system will function properly for a prescribed period of time.

649 Halo Drive Site Plan

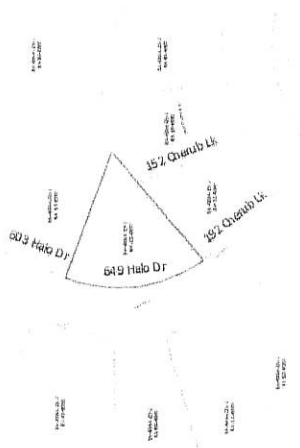

Block 3 Lot 32

ıe Removal: ~ 10 trees from center property will need to be removed arked with orange tape)

ıveway: Existing driveway will be lized

ılities: Existing NLI power pole on the ɔperty will need to be relocated to ɛ SW to deconflict with build site

ıter: Existing water line (old) will be noved and new (poly) line installed ın curb stop to proposed Bldg

See Pg 2

N

152 Cherub Lake Rd

192 Cherub Lake Rd

Proposed Septic Area

Drain field

Tank

Property Line

170'

Property Line

Existing Water Line

Proposed New Water Line

Proposed New UG Power

Existing OH Power Line

50'

30'

181'

NLI Power Pole
T
174A
3
20N

Curb stop

649 Halo Dr

Bull Lake ~285ft

Halo Dr

To NLI Power Pole "21" located between 658 Halo Dr and 678 Halo Dr

- Existing NLI Power Pole
- Proposed New Pole Loc
- Water Line Curb Stop
- Existing Overhead Power
- Proposed UG Power
- Existing Water Line
- Proposed New Water Line