LINCOLN COUNTY HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 9/28/2026 Expiration Date: 9/27/2027 Permit#26-53535

Property Owner: George and Mandi Steffenson

Mailing Address: [redacted]

Installer: Homeowner License #:

Approved Work: (Check One) ☒ New Installation ☐ Existing System

☐ Replace Drainfield ☐ Replace Tank ☐ Extension

Describe: Installation of gravity system for 3 Bedroom House.

Legal: SUNRISE TERRACE 2, S33, T31 N, R31 W, ACRES 1.023, LOT 8 PM 6185

Property Address: 144 Skyline Rd., Libby, MT 59923 Assessment Code: 53535

DEQ COSA: E.Q.#97-1473 Sunrise Terrace 2 Date: 3/24/97

Approved Design Criteria: Installation of gravity system for 3 Bedroom House with 3 Laterals @ 70'.

# of Bedrooms: 3 Septic Tank Size: 1000 Trench Width: 24"

# of Laterals: 3 Length of Laterals: 70' Trench Depth: 24"-36"

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET!!

Special Instructions: Install system according to the lot layout, the Lincoln County Wastewater Treatment and Disposal Regulation, Circular DEQ-4, and COSA(If Applies). It is the installer's responsibility to ensure that all required horizontal setbacks are met. CHANGES MUST BE PRE-AUTHORIZED BY THE DEPARTMENT.

Issued By: *Robin Blumberg, RS*

NOTICE: The Department must be notified at least 3 business days (72 hours) prior to backfilling the system. Call 406-283-2442. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation Ch. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.

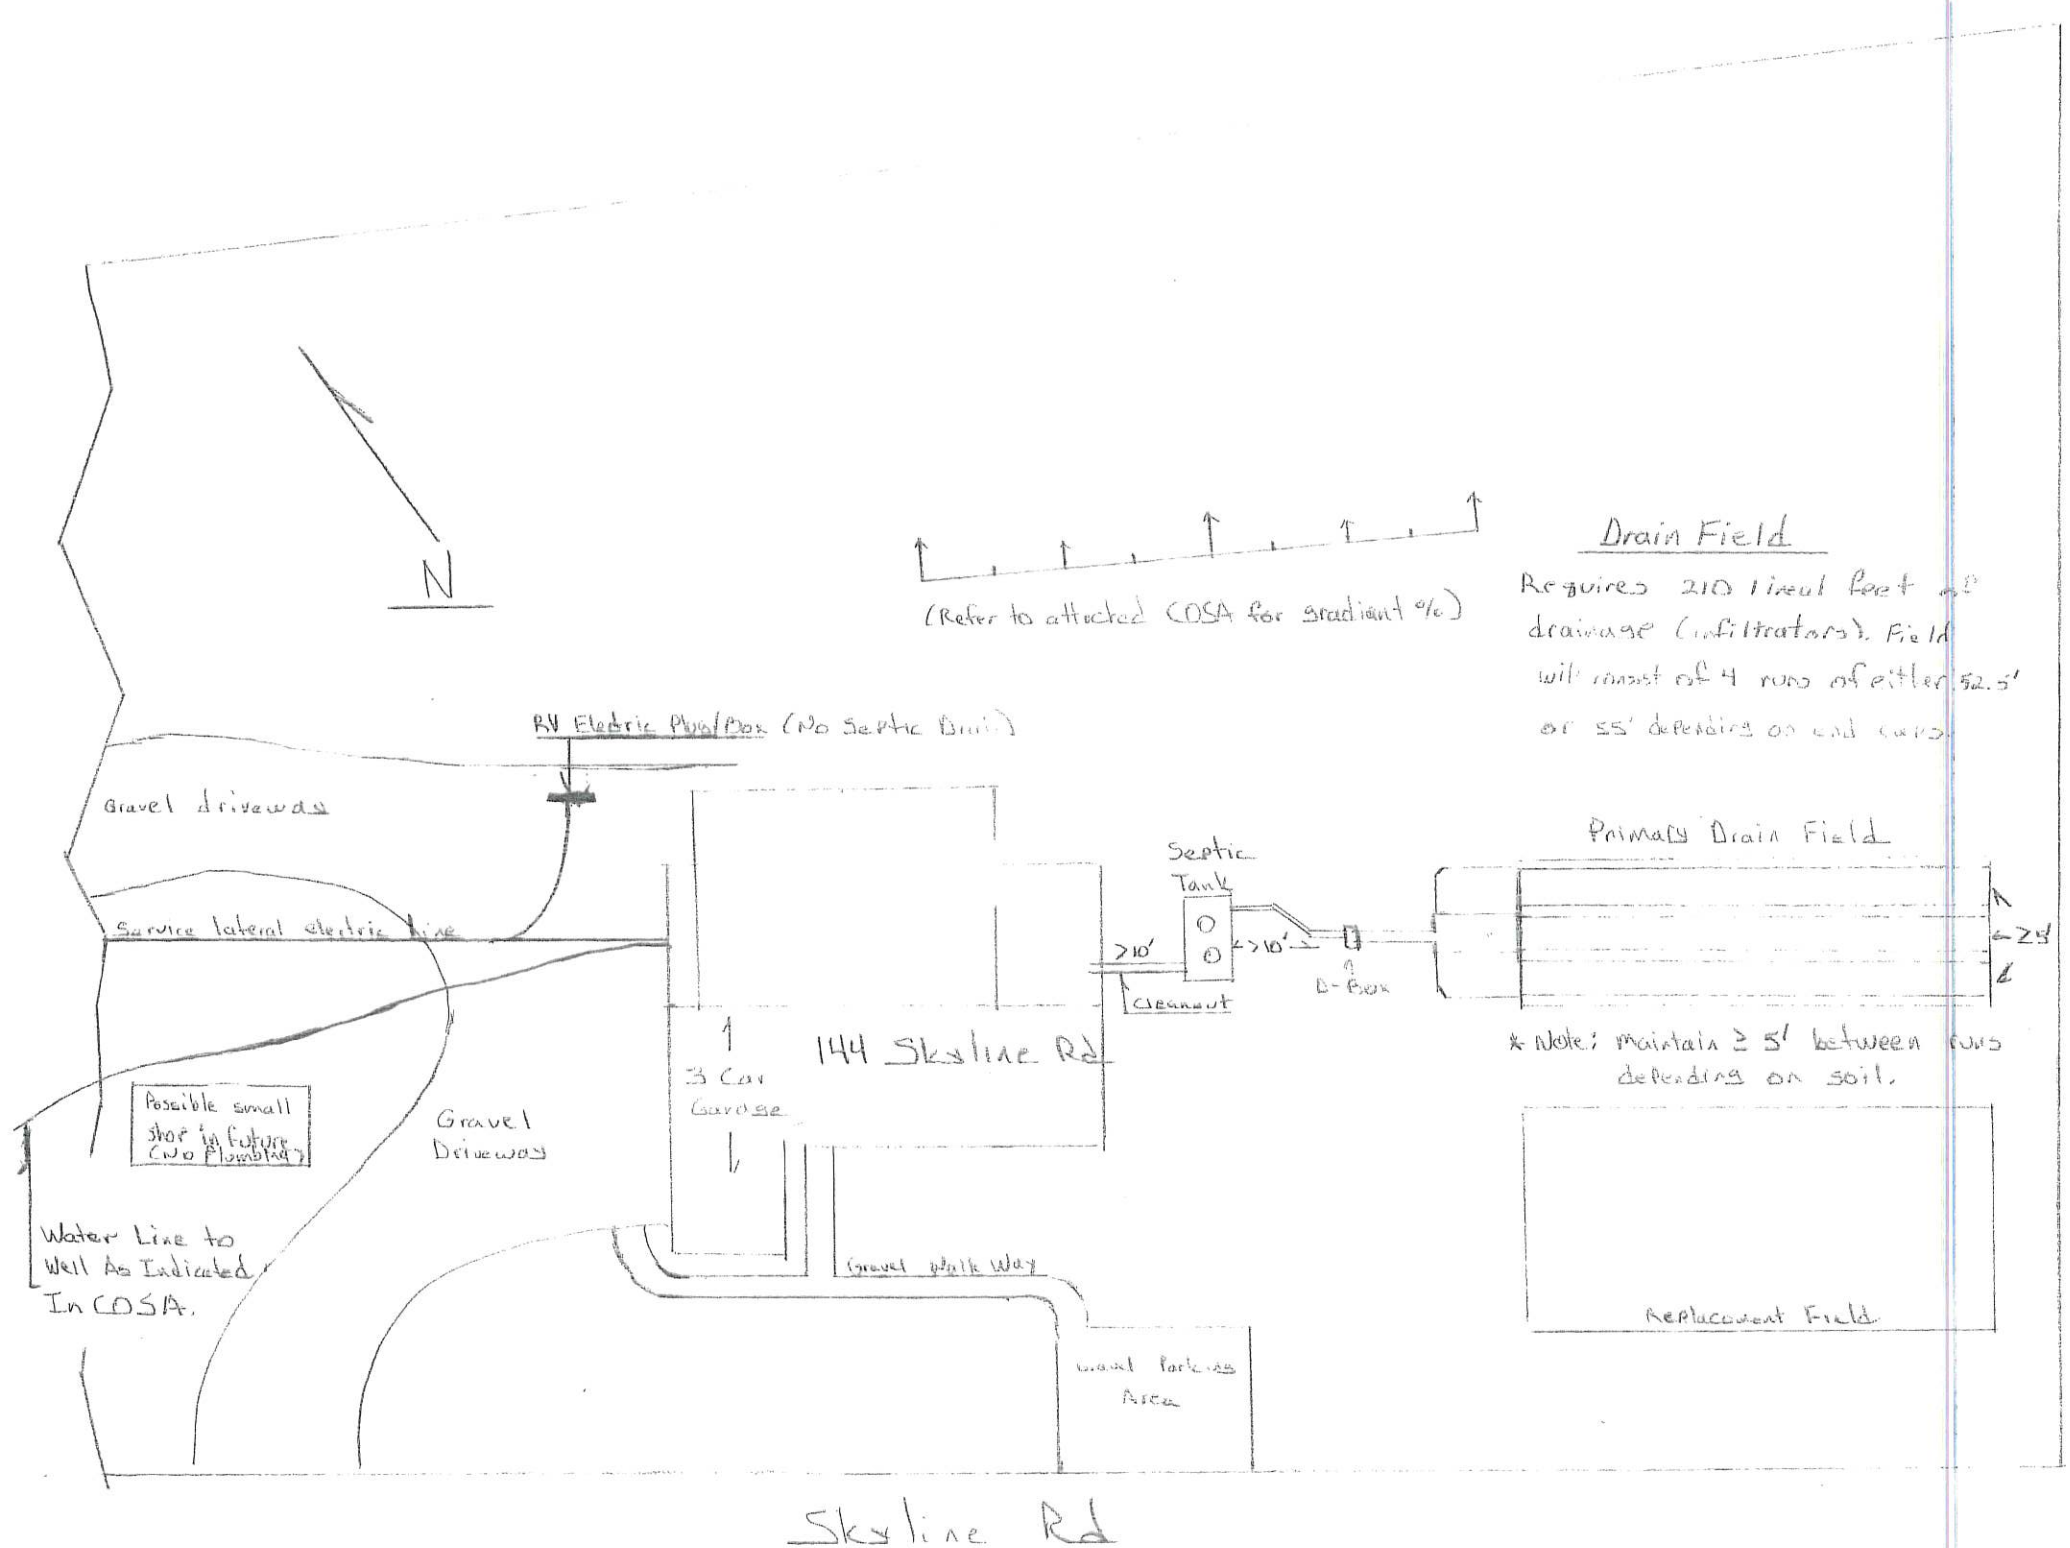
Closure Statement:

This system is in compliance with the approved design criteria and Lincoln County's Wastewater Treatment and Disposal Regulation.

Signed: _____ *Date:* _____

This permit is not finalized until the system is inspected and the closure statement is signed.

This permit is not a guarantee that the system will function properly for a prescribed period of time.


N
(Refer to attached COSA for gradient %)
Drain Field
Requires 210 lineal feet of drainage (infiltrators). Field will consist of 4 runs of either 52.5' or 55' depending on soil conditions.
RV Electric Pedestal Box (No Septic Drain)
Gravel driveway
Service lateral electric line
Septic Tank
>10'
>10'
Cleanout
D-Box
Primary Drain Field
25'
* Note: maintain ≥ 5' between runs depending on soil.
1
3 Car Garage
144 Skyline Rd
Possible small shop in future (No Plumbing)
Gravel Driveway
Water Line to Well As Indicated In COSA.
Gravel walk way
Gravel Parking Area
Replacement Field
Skyline Rd