

CERTIFIED LAND CORNER RECORDATION

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (IF KNOWN)

T30N R30W Montana Principal Meridian G.L.O. notes book 8958 page 179 has an iron post 30" long  $2\frac{1}{2}$ " in diameter 26" in the ground with a brass cap marked T30N R30W Found the brass cap in good condition and

$\frac{1}{4}$  S14  
S23  
1965

undisturbed.

Record: 27" tamarack bearing N42 $\frac{1}{2}$ ° W, 42 lks., marked S14 BT  
Found: Bearing tree dead but still standing

Record: 9" fir bearing N39 $\frac{1}{2}$ ° E, 59 lks., marked  $\frac{1}{4}$  S14 BT  
Found: Bearing tree alive and still 9" in diameter bearing N43 $\frac{1}{2}$ ° E  
CONTINUED ON REVERSE SIDE

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED  
TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

Date of work:.....

No added monumentation

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNERS IF DETERMINED IN THIS SURVEY.  
(MAY SKETCH OR PASTE REPRODUCTION ON REVERSE SIDE.)

See sketch on reverse side

Surveyor's Seal



I, James R. Staples  
certify that the information shown herein is true and correct.

James R. Staples  
Signature of Ground Party Chief

JOHN C. ERICKSON


I, \_\_\_\_\_  
certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

John C. Erickson  
Signature of Surveyor

3979 S  
Registration Number

DIAGRAM OF CORNER:

N. T30N R30W




= Corner recorded on the sheet

Office of Clerk and Recorder, County of Lincoln

This "corner record" was filed for record on the 28 day of Mar 1989, was noted on the cross-index plat and is

assigned page No. 3986, in book No. \_\_\_\_\_

Count by Seal by Bill Buckoff  
County Official

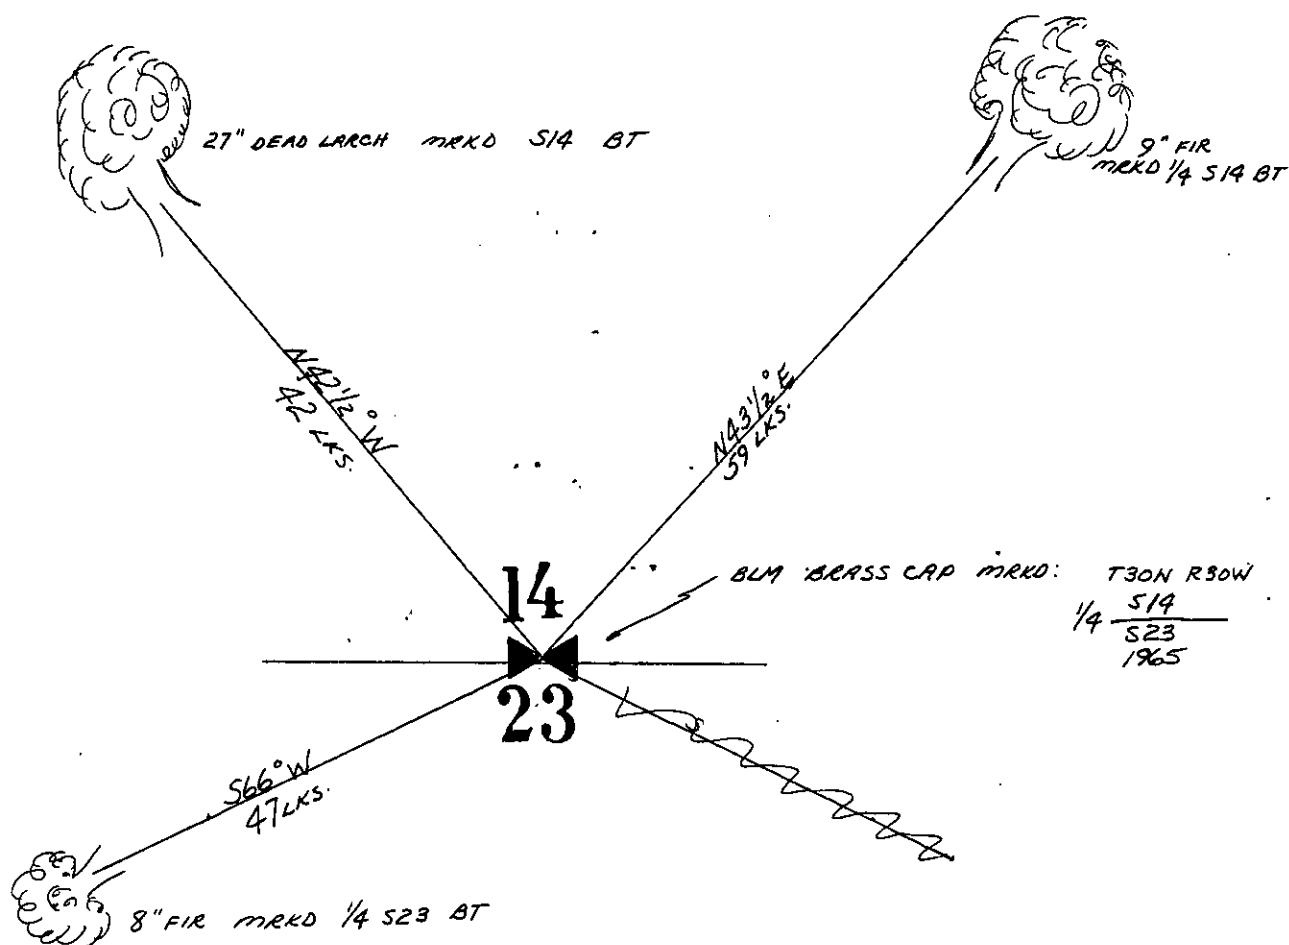

-----  
Description of evidence and original record continued from page 1

Record: 6" fir bearing S62° W, 47 lks., marked 1/4 S23 BT

Found: Bearing tree alive and presently 8" in diameter bearing S66° W