

CERTIFIED LAND CORNER RECORDATION
(REFERENCE FSH 5681.65)

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (IF KNOWN)

At the 1/4 section corner common to section 19, R. 33 W, & section 24, R. 34 W, both T. 30 N, P.M.M. Lincoln County, Montana,

We find:

A squared 3-inch X 3 inch wood post, set firmly, not scribed, definitely not original, but set beside the burned out remains of the original wood stake, which we followed underground for 12 inches.

(Record: "Post, 3 feet long, 3 inches square, 24 inches in ground----")

From which

A 18-inch larch bears N. 76° E., 25 links distance, scribing definite.

(Record: "Tamarack, 12-inch diameter, bears N. 74 1/2° E., 24 links distance.") and

A 14-inch larch bears S. 56° W., 22 links distance, scribing plain.

(Record: " 12-inch diameter Tamarack bears S. 56° W., 22 links distance --.")

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED
TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

Date of work: May 17, 1966


To perpetuate this corner, in the exact position of the original burned out wood stake, we set a 28-inch galvanized iron pipe, 1 1/2-inch diameter, 20-inches in the ground, packed with rock underground, with brass cap marked:

And create two new reference monument trees which bear from the corners as follows:

- (1) A 3-inch larch bears S. 86° E., 29 links distance, and
- (2) A 4-inch larch bears N. 56° W., 34 links distance,

both double blazed and scribed "RM".

We placed boundary, "BT", location, and warning signs.



SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNERS IF DETERMINED IN THIS SURVEY.
(MAY SKETCH OR PASTE REPRODUCTION ON REVERSE SIDE.)

Surveyor's Seal

Bob Lichlyter, C. Nelson, Wayne Avants, Don Cook
We x Ira M. Tillotson, A. Gibson, R. Starling, DIAGRAM OF CORNER:


certify that the information shown herein is true, and correct, /s/ Bob Lichlyter /s/ C. Nelson, /s/ Wayne Avants, /s/ Don Cook /s/ Ira M. Tillotson /s/ A. Gibson /s/ R. Starling

Signature of Ground Party Chief

I, _____
certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

Ira M. Tillotson
Signature of Surveyor

858 ES
Registration Number

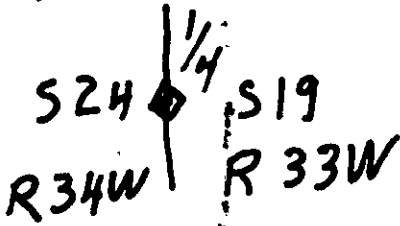

= Corner recorded on the sheet

Office of Clerk and Recorder, County of *Lincoln*
This "corner record" was filed for record on the *12th* day of *April* 19 *68*, was noted on the cross-index plat and is assigned page No. *100*, in book No. *1*

Eleanor L. Vaughan
County Official *W. Wilson, Dep.*

Cross Index No. *P-1* T. *30 N* R. *33 W* Mer. *33 W*