


2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography lies, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.


CERTIFIED CORNER RECORDATION

Corner East 1/4 Corner Section 1 T. 31N R. 29W P.M.M. Lincoln County

- 40 Chains: Set a slate stone 16X8X5 inches 11 inches in the ground for 1/4 Section corner marked 1/4 on W face from which a Fir 14 inches in diameter bears S74°35'W 13 links distance marked 1/4 S 1 B.T. A Fir 18 inches diameter bears N55°30'E 43 links distance marked 1/4 S6B.T.
- Found: Stone and stumps from bearing trees. As per GLO record.
- Set a 3"X30" aluminum monument marked as shown below from which a Pine 10 inches in diameter bears S32°W 15.3 feet scribed T31N.,R.29W S1 B.T. and posted. A Larch 14 inches in diameter bears S89°E 20.7 feet scribed T31N.,R.28W S6B.T. and posted. A location poster attached to a 12" Pine bears S16°E 6.1 feet.



Monument marked as shown.

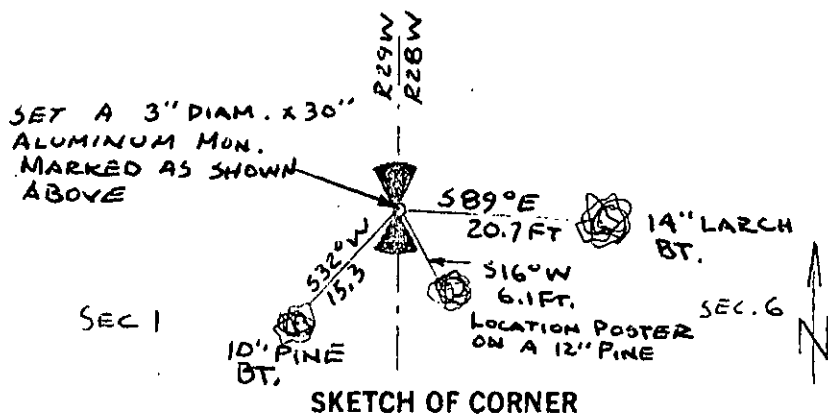

CERTIFICATION

I, _____
certify the information shown herein is true and correct.

Signature Ground Party Chief

Jack H. Ninneman

I, _____
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.D.A.)

Signature of Surveyor & Seal
12/30/81 4661S

Date: _____ Reg. No. _____


Employer: Ninneman Engineering Inc.

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on the January 18th day of 1982 was noted on the cross-index plat and is assigned page No. 1484, in book No. _____

Eleanor L. Vaughn by Betty L. Conner
County Official deputy

Cross Index No. C-25 T. 31N R. 29W P.M.M.

Sec. 1



• - corner this sheet