

CERTIFIED CORNER RECORDATION

CORNER E 1/4 S 18 T. 31 N., R. 33 W., P.M.M. LINCOLN COUNTY

RECORD:

Per GLO Records of Danial P. Mumbrue of April, 1893 Contract No. 440

Set a post 3 ft. long, 3 ins. square, 24 ins. in the ground, for a 1-4 Sec. Corner, marked 1-4 S. on N. face; from which

A Spruce 12 ins. in diam. bears N51 1/4°E 24 lks, distant marked 1-4 S. BT

A Cedar 12 ins. in diam. bears S64 1/4°W 27 lks, distant marked 1-4 S. BT

FOUND EVIDENCE:

Found original Cedar BT on ground with visible scribe which bears N66°W 20.0 dist. from corner.

Found 5/8 inch diam. rebar capped with a 1 1/4 ins. diam. YPC marked JHN 4661s on ground per corner recordation of 1980

PERPETUATION:

Set a 3 1/4 inch aluminum cap stamped (see diagram below) on a 5/8 inch dia. rebar 30 inches long. From which


A 16 inch DBH Double Cedar scribed T31N R33W S 18 1/4 BT. bears S 69° W 22.9 feet dist.

A 8 inch DBH White Fir scribed X BT bears S 7° W 26.0 feet.

Painted 6 inch wide bands with attached bearing tree signs to all trees.

MAGNETIC DECLINATION: 18° E

Original Cedar

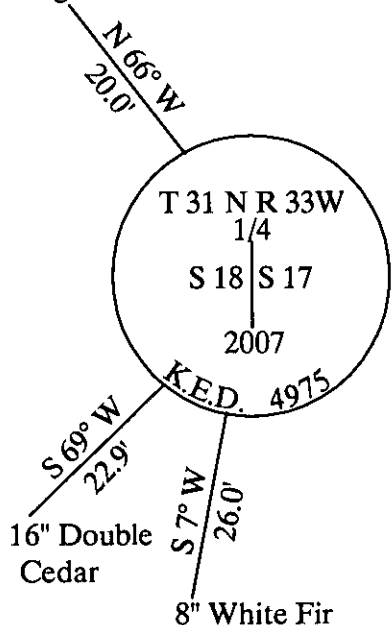

CERTIFICATION

I, GEORGE CLARK

Certify the information shown herein is true and correct

Signature of Ground Party Chief

I, KENNETH E. DAVIS

I certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (80-22-101 et seq. M.C.A.)

Signature of Surveyor & Seal


Date: 1/18/08 Recorder No. 4975-S

Employer: DAVIS Surveying, Inc

SKETCH OF CORNER

Office of Clerk and Recorder, County of LINCOLN 208460 BOOK: CCR CC&R'S PAGE: 11182 Pages: 1
This "corner rec was noted on the No. 18 In book No. 18
STATE OF MONTANA LINCOLN COUNTY
RECORDED: 01/04/2008 9:25 KOI: CC&R'S
TAMMY D. LAUER CLERK AND RECORDER
FEE: \$0.00 BY: George Clark
TO: DAVIS SURVEYING, INC. P.O. BOX 896, TROY, MONTANA 59935

SECTION



Cross Index No. E 1/4 S 18 T. 31 N., R. 33 W., P.M.M.

THIS CORNER